

1

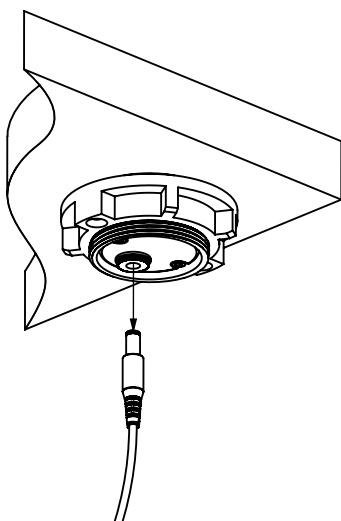


FIGURE 1

Remove the jack located at the bottom of the charger.

2

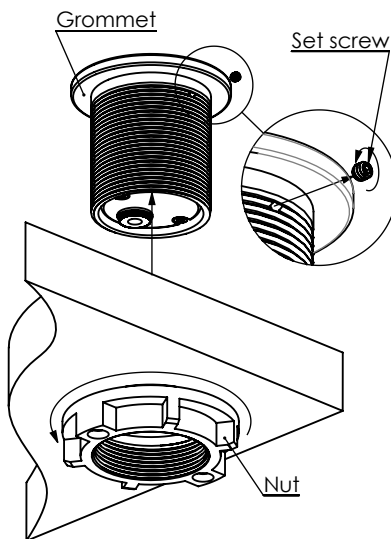


FIGURE 2

Rotate the nut counterclockwise to unscrew and remove the grommet.

Using the Allen key provided with the charger assembly remove the set screw from the side of the grommet as shown above.

3

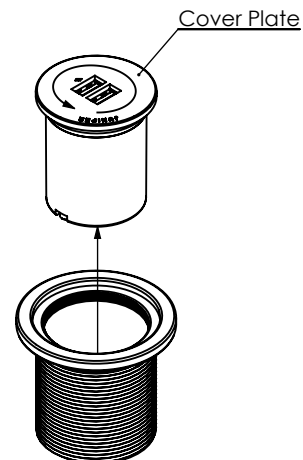


FIGURE 3

Using the palm of your hand rotate the cover plate counterclockwise to remove the charger assembly from the grommet.

4

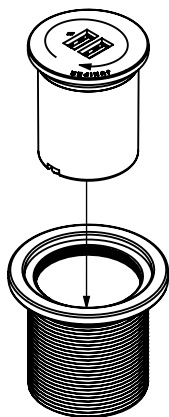


FIGURE 4

Place the replacement charger assembly inside the grommet and rotate the cover plate clockwise to fix the charger assembly in place.

5

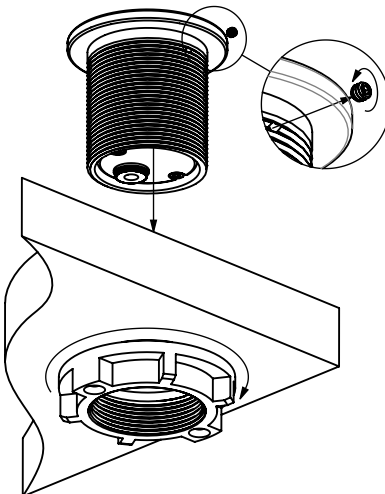


FIGURE 5

Insert the set screw removed during the second instruction, in the grommet to secure the charger assembly with the grommet.

Insert the grommet back in place and secure using the nut.

6

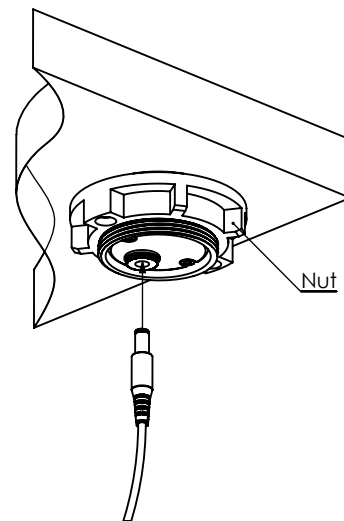


FIGURE 6

Insert the jack at the bottom of the charger assembly.

KEEPING IT CLEAN

Gentle care is required in order to retain the quality metal finish of DKUS charger for years to come. Like other natural metals, brass will patina over time, with natural yellow hues intensifying over time. Juniper protects its brass with a mild matte lacquer to delay coloration of the metal, and to protect it from exposure to humidity and natural oils.

In order to remove dirt, dust and fingerprints; gently wipe the charger with a damp cloth. Do not use any chemical cleaning solutions; especially those containing ammonia, as this will damage the surface finish of the brass.