


MG 2436, 2448, 2460 Granulators



Standard Features

- "Pivot" Cutting Chamber Technology
- Advanced Cutting Geometry – "V" Rotor
- Double Scissors Cut Knives
- Rotating End Discs
- Pre-Adjustable Knives
- Power Assisted Tilt-Back Hopper
- D2 Knives
- Removable Flap Assembly
- Redundant Safety Switches
- TEFC Motor
- Flywheel Type Pulley
- Extended Rotor Journal
- Oversized Sealed Bearings
- Separate Foot Mounted Electrical Controls
- Rotor Locking Device
- Reversible Screen

Dimensions and Features

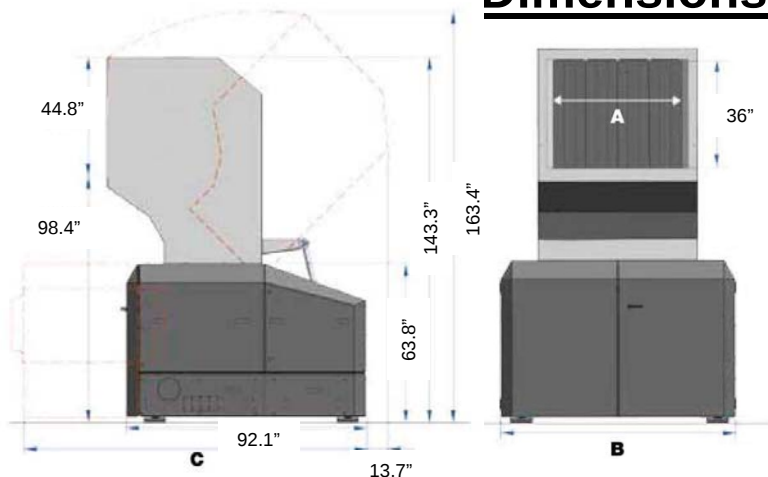

FEATURE		STANDARD	OPTION
Fixed Knives		2	3 / 4
Rotating Knives		6	10
Motor, (hp)	MG-2436	100	125/150
	MG-2448	100	125/150/200
	MG-2460	125	150/200/250
Screen diam. (mm)		8	5/6/10/12/17/25
Rotor Type		3-blade	5-bl/7-bl/25

MODEL	A	B	C
MG-2436	24"	77"	126"
MG-2448	47.2"	89"	137.8"
MG-2460	59"	100.8"	149.6"

	MG-2436	MG-2448	MG-2460
Rotor diam. (in)	24"	24"	24"
Cutterhouse opening (in)	24" x 36"	24" x 48"	24" x 60"
Capacity (lbs/hr.)	0-5500	0-6600	0-8800



Milacron, LLC • 4165 Halfacre Rd • Batavia, Ohio 45103
Tel (513) 536-2000 • Fax (513) 536-2321 • www.milacron.com

*Design and appearance subject to change without prior notice