


COLD BLOW AIR FUNCTION

Product Description: Cold blow air function

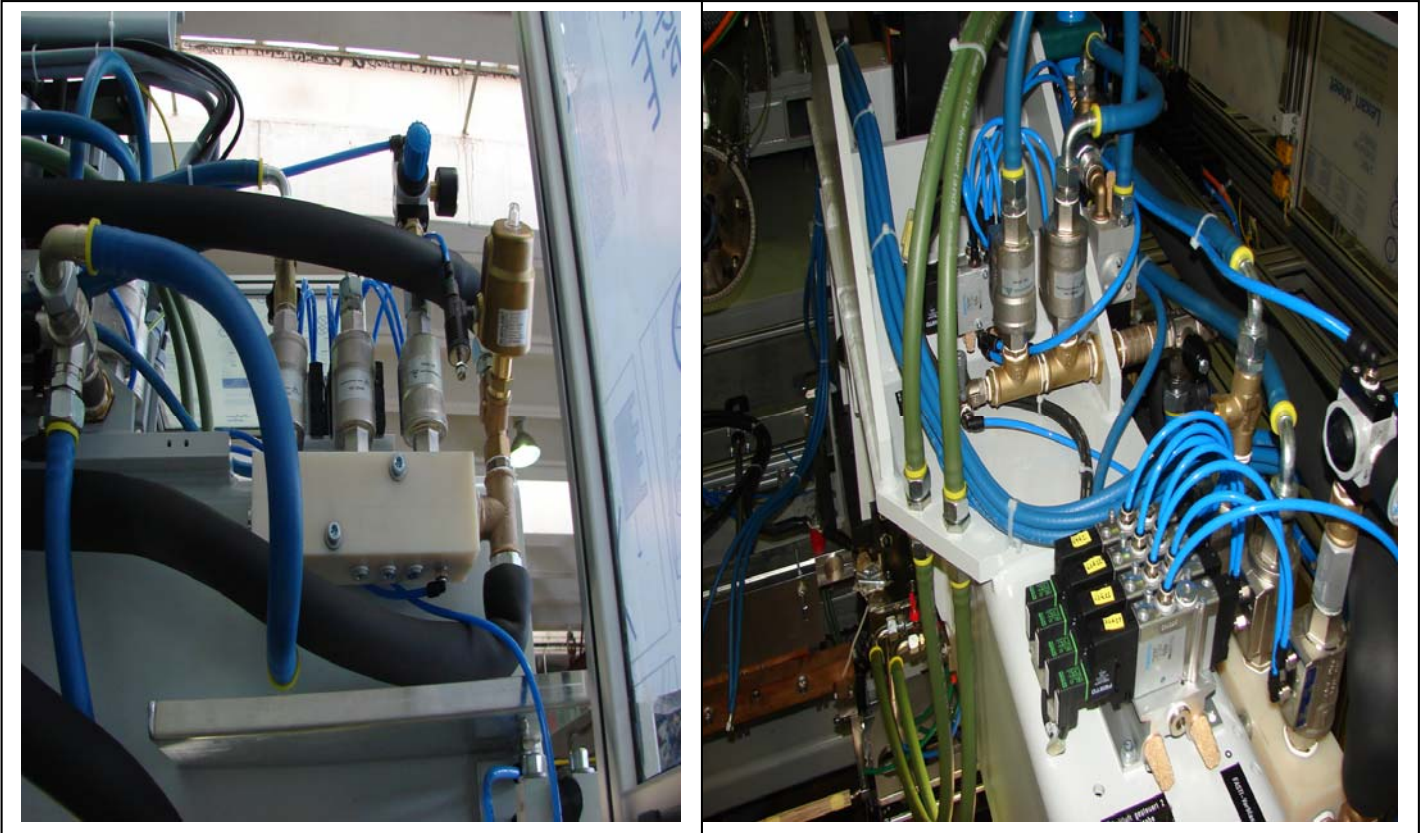

Advantages:

- Reduce cycle time
- Increase productivity of machine

Features:

- Systems with blow air of about 3 ° C - standard blow valves ok
- Systems with sub-zero blow air – special valves, special blow pins and insulation of air lines needed. Blowing time can be reduced up to 20 %

Hardware structure:

- Includes only electric pneumatic controls. **AIR CHILLER NOT INCLUDED.**
- Remark: Need to check extrusion capacity – is extruder big enough for more output? Can extrusion head take more material throughput per hour?

Product Availability:

	UMS 4.S/D	UMS 8.S/D	UMS 12.S/D	UMS 16.S/D	UMS 20.S/D	UMS 24.S/D	UMS 30LS.S/D	UMS 32.S/D	UMS 35LS.S/D	UMS 35.S/D
HYDRAULIC MACHINES UMS										
Cold blow air function	X	X	X	X	X	X	X	X	X	X
ALL ELECTRIC MACHINES UMS	UMS 4E.S/D	UMS 8E.S/D	UMS 12E.S/D	UMS 20E.S/D	UMS 32E.S/D					
Cold blow air function	X	X	X	X	X	X				