

JUNIPER®



UNIVERSE

S Y S T E M

A NEW GENERATION OF INDOOR POWER DISTRIBUTION

UNIVERSE SYSTEM AT A GLANCE
FEATURES AND BENEFITS

ULTRA LOW PROFILE RIBBON TRACK

MAGNETIC CONNECTION
SURFACE OR SUSPENSION MOUNT



LUMINAIRE FINISHES

HIGH PERFORMANCE URETHANE ENAMELS
SATIN WHITE, SATIN BLACK, SATIN
ALUMINUM, CUSTOM COLORS

RIBBON FINISHES

HIGH PERFORMANCE URETHANE ENAMELS
PRIMER WHITE*, SATIN WHITE, SATIN BLACK,
SATIN ALUMINUM, CUSTOM COLORS

*—Primer white ribbon is field paintable.

SIMPLE INSTALLATION

SURFACE MOUNTED CLIP SYSTEM
FIELD CUTTABLE
JUNCTION BOX COVERS
SURFACE MOUNTED POWER SUPPLIES

SUPERIOR LIGHT QUALITY

90+ CRI
85 LUMENS/WATT DELIVERED AVERAGE
FLICKER FREE DIMMING

CONNECTORS

90, 3-WAY, 4-WAY AND OUT-OF-PLANE
ALL STANDARD

COLOR TEMPERATURES

2700K, 3000K, 3500K, 4000K

VOLTAGE DROP CORRECTION

150’ OF RIBBON CAN BE POWERED VIA A SINGLE
96W POWER SUPPLY
ADD POWER SUPPLIES FOR LONGER RUNS WITH
SEAMLESS CONTINUITY

DIMMING

2 CIRCUITS STANDARD
0–10V OR PHASE
CASAMBI WIRELESS AVAILABLE

POWER SUPPLIES


24V DC
REMOTE AND SURFACE MOUNTED OPTIONS AVAILABLE

SPOTLIGHTS

500 AND 800 LM OUTPUT
FIELD REPLACEABLE BEAM ANGLES
21°, 37°, 50° STANDARD
PRECISION MACHINED ALUMINUM
FULL 360° ROTATION AND 0–90° TILT

UNIVERSE SYSTEM

VISUAL COMPONENTS GLOSSARY

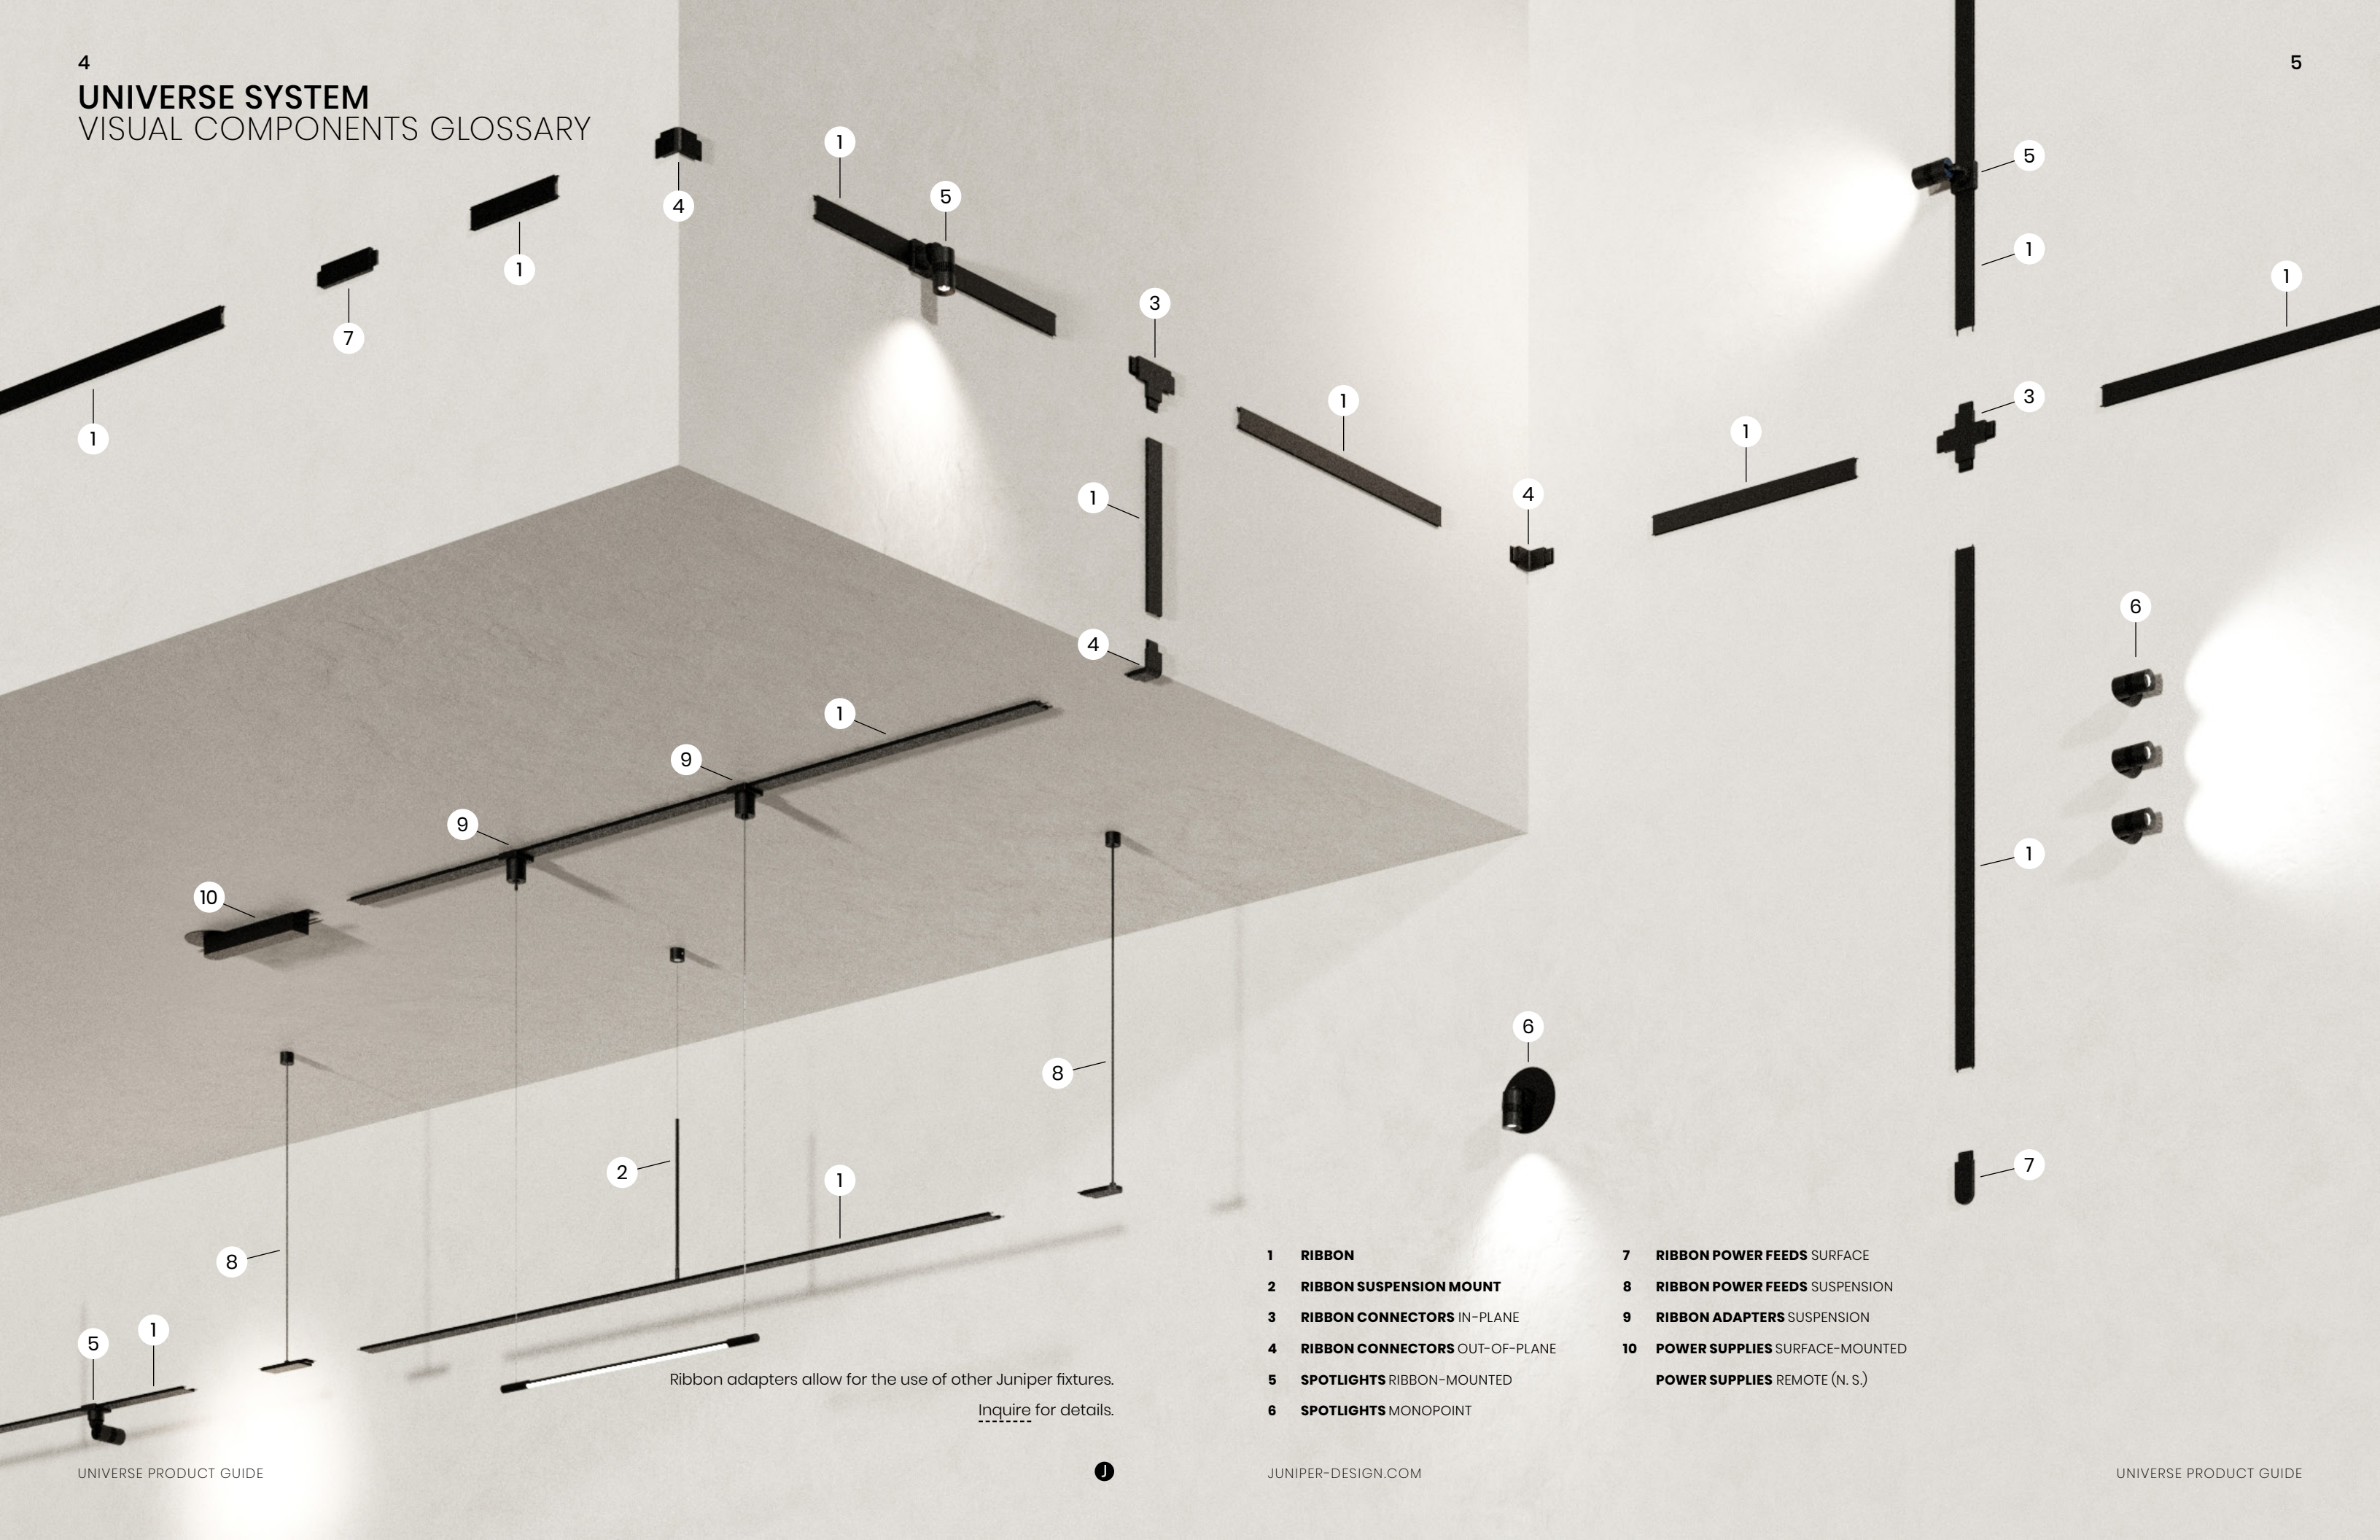

Ribbon adapters allow for the use of other Juniper fixtures.

[Inquire for details.](#)

- 1 **RIBBON**
- 2 **RIBBON SUSPENSION MOUNT**
- 3 **RIBBON CONNECTORS IN-PLANE**
- 4 **RIBBON CONNECTORS OUT-OF-PLANE**
- 5 **SPOTLIGHTS RIBBON-MOUNTED**
- 6 **SPOTLIGHTS MONOPOINT**

- 7 **RIBBON POWER FEEDS SURFACE**
- 8 **RIBBON POWER FEEDS SUSPENSION**
- 9 **RIBBON ADAPTERS SUSPENSION**
- 10 **POWER SUPPLIES SURFACE-MOUNTED**
POWER SUPPLIES REMOTE (N. S.)