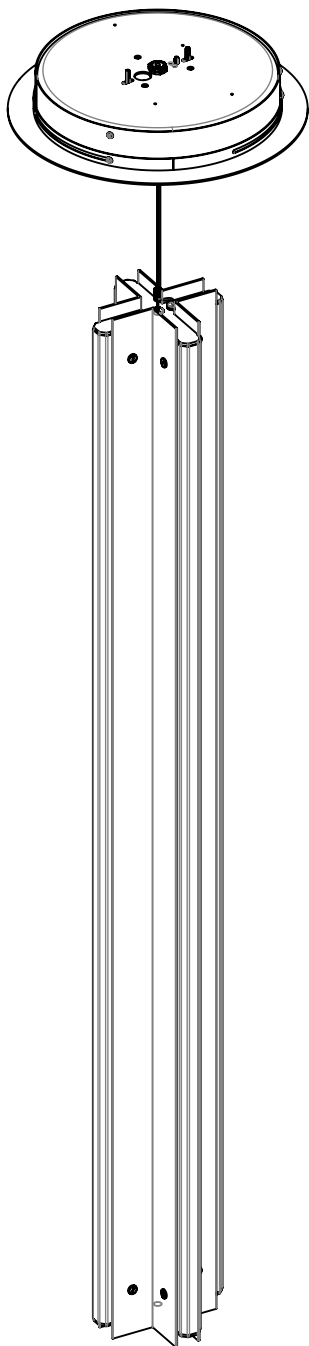


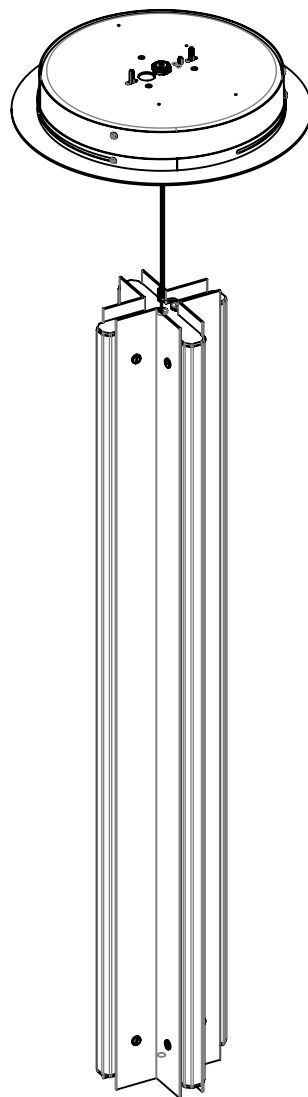
JUNIPER[®]

AXIS X – Vertical Suspension

Local Installation Guide



48" AXIS X – Vertical Suspension



36" AXIS X – Vertical Suspension

WARNING

**A LICENSED ELECTRICIAN SHOULD PERFORM INSTALLATION.
DISCONNECT MAIN POWER AT THE SOURCE PRIOR TO INSTALLATION.**

INSTRUCTIONS MEANT FOR A LOCAL CLASS 2 DRIVER.

DUE TO HEAVY WEIGHT OF THE FIXTURE, EXTRA CAUTION IS REQUIRED WHEN HANDLING.

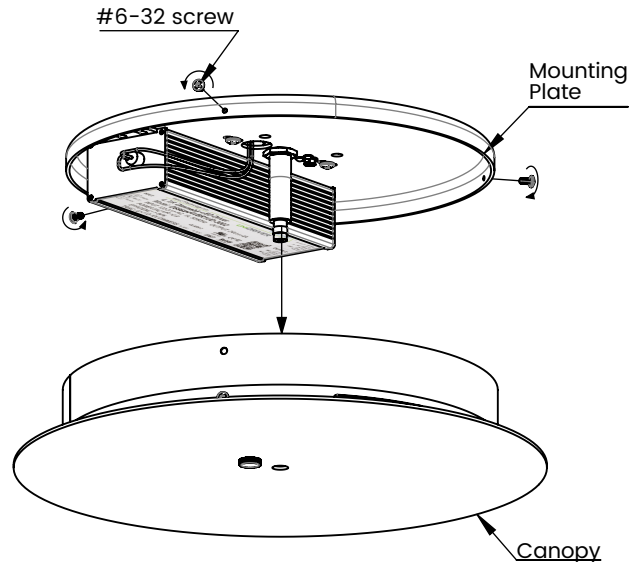
STEP 1: FIXTURE INSTALLATION**1**

FIGURE 1

Remove #6-32 screws from the canopy to release the mounting plate.

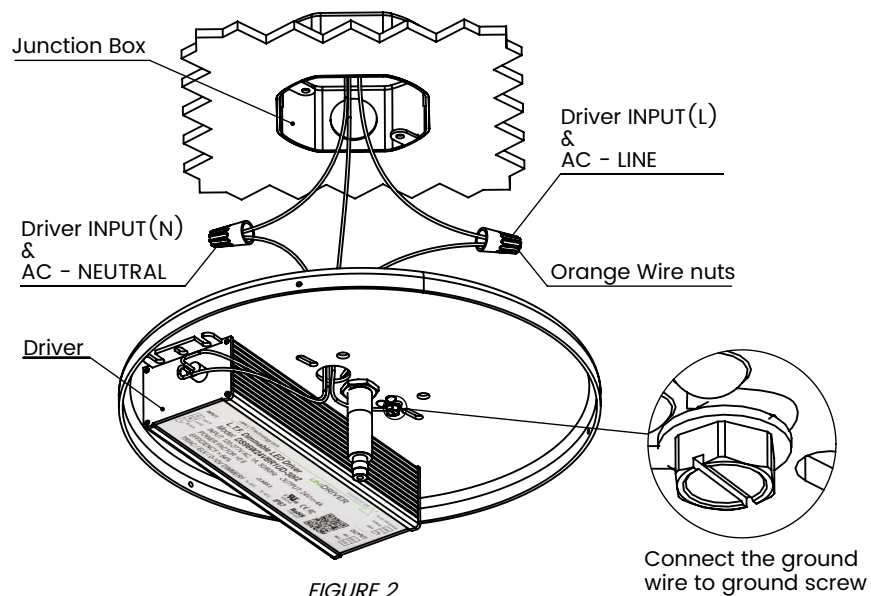
2

FIGURE 2

As shown above, make electrical connections between the **AC** input of the driver and the **AC** wires present in the electrical box. Use provided orange wire nuts,

AC wires to the drivers are not provided.

3

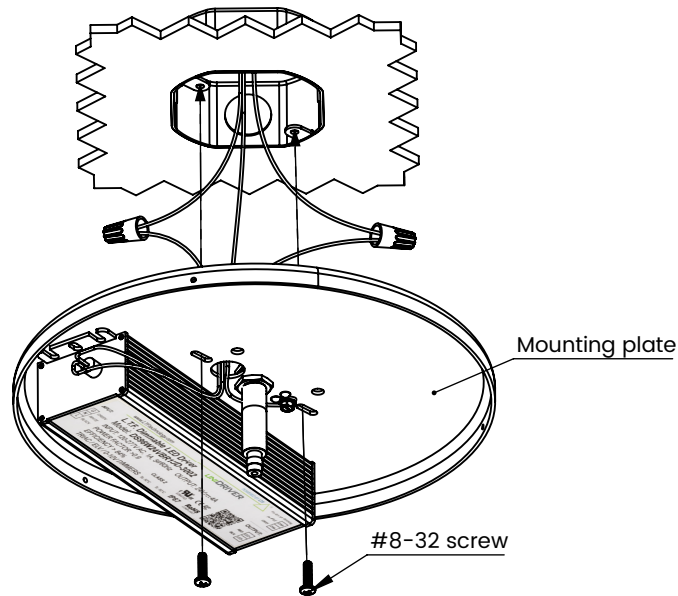


FIGURE 3

Attach mounting plate to the junction box using provided #8-32 screws.

4

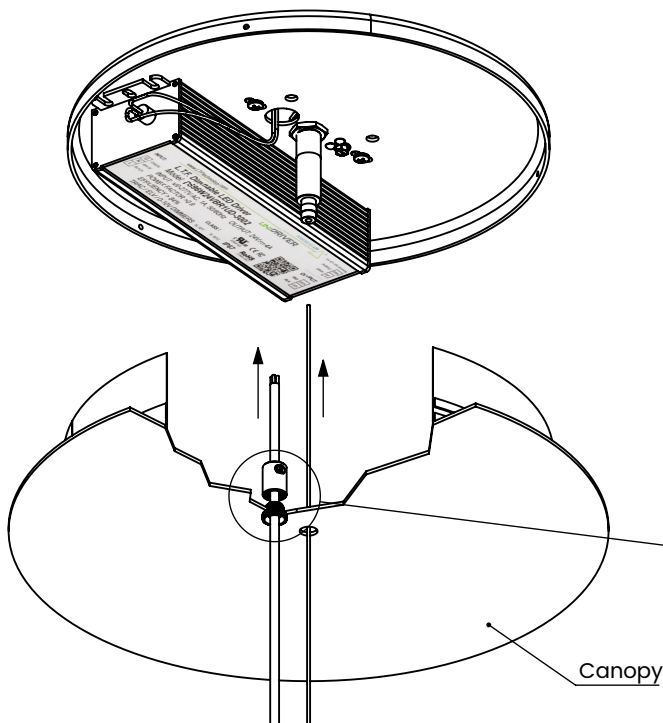


FIGURE 4




FIGURE 6




FIGURE 7

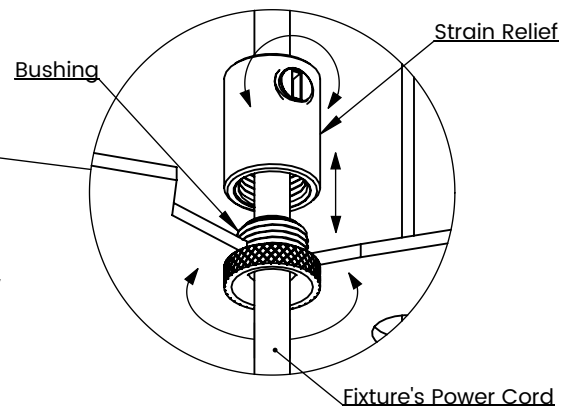


FIGURE 5

Pass the aircraft cables through the canopy. Partly loosen safety nut on cable gripper. Feed aircraft cable through the gripper. Adjust the cable length as needed by pressing the safety nut on the gripper. Tighten safety nut in completely when finished. **Do not cut extra aircraft cable until full fixture is assembled and desired suspension height is achieved.**

Remove the strain relief by unscrewing the bushing. Loosen set screw on the strain relief. Pass the fixture's power cord through the bushing and strain relief. Tighten the set screw, leaving some slack in the power cord. Screw strain relief into the bushing.

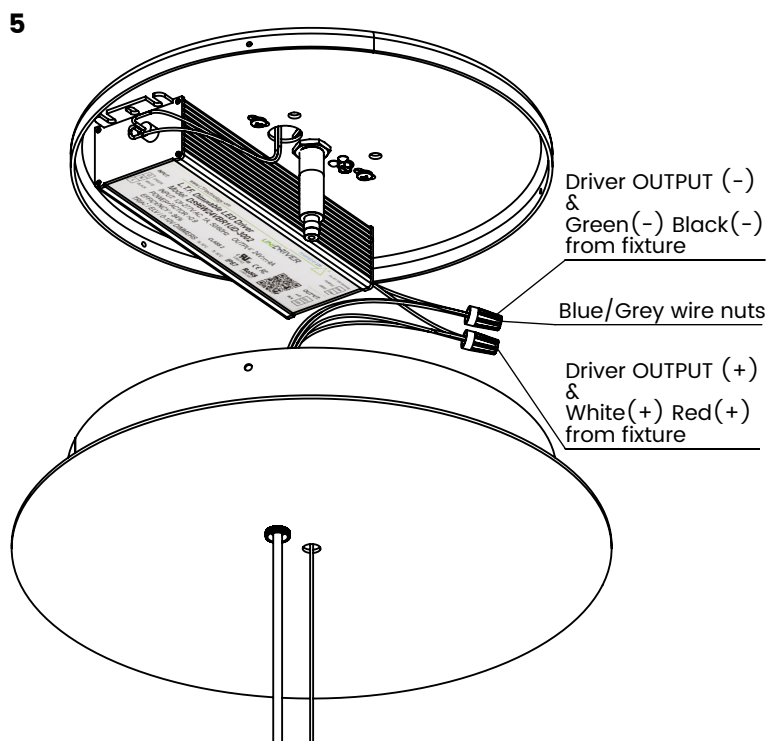


FIGURE 8

Connect wires from fixture to driver's output according to diagram by using provided **blue/grey** wire nuts.

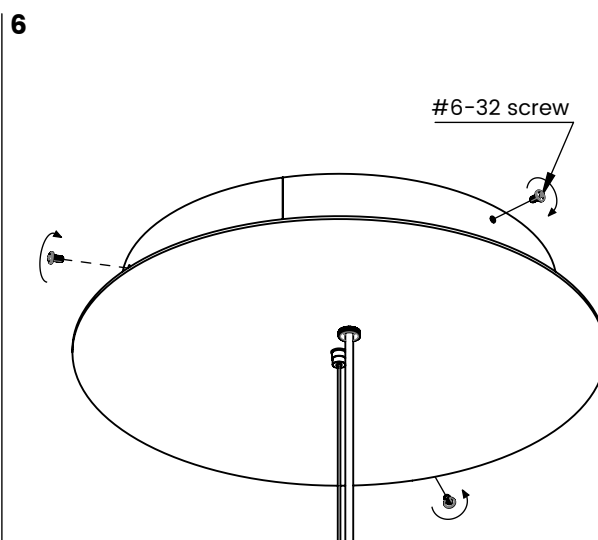


FIGURE 9

Install the canopy on mounting plate using #6-32 screws removed during the first instruction.

STEP 2: CONSTRAINING THE POWER CORD

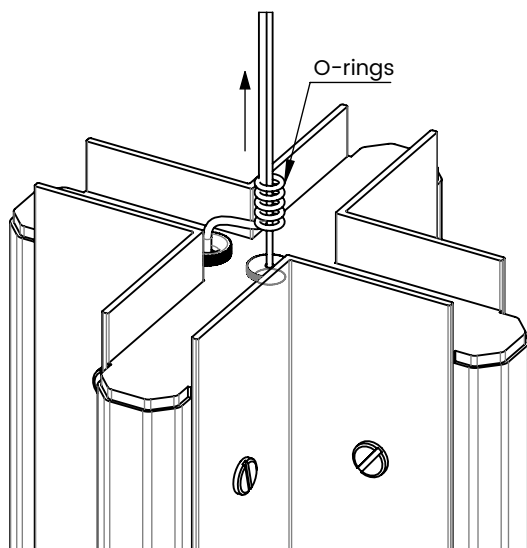


FIGURE 10

Space the O-rings apart at the power end along the length of the cable to constrain the power cord to aircraft cable.

CARE INSTRUCTIONS

Brass will patina over time like other natural metals and regular care is required in order to retain the quality finish of your fixture for years to come.

Gently wipe with a damp cloth to remove dirt, dust, and fingerprints.

Do not use any chemical cleaning solution.

Use indoors only.