


JUNIPER[®]

THIN Solids Suspension

Local Installation Guide

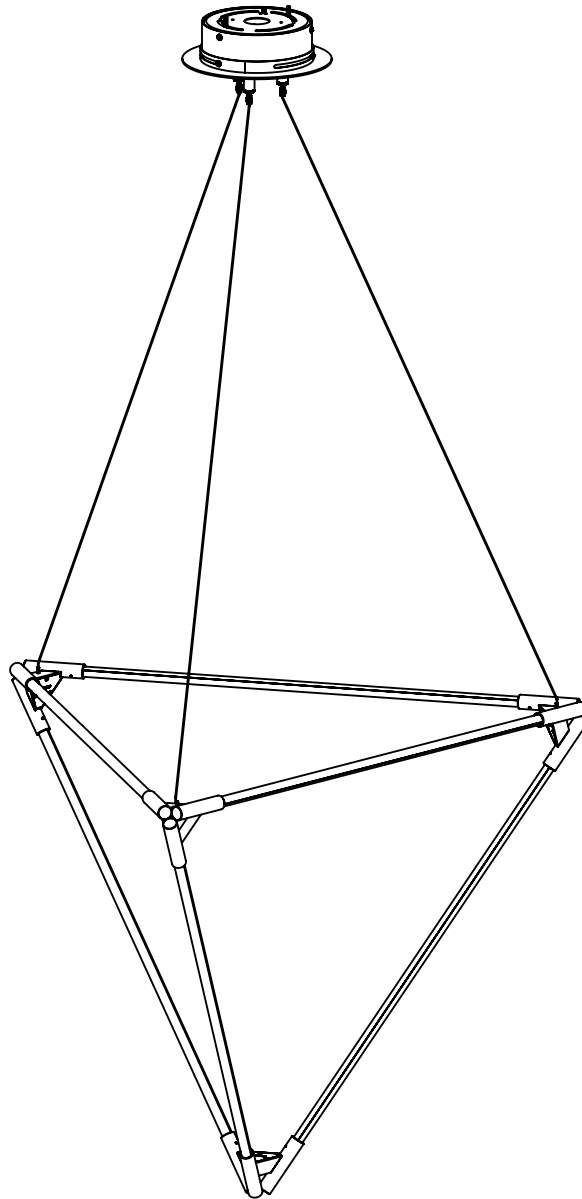


24" TETRAHEDRON

WARNING

**A LICENSED ELECTRICIAN SHOULD PERFORM INSTALLATION.
DISCONNECT MAIN POWER AT THE SOURCE PRIOR TO INSTALLATION.**

INSTRUCTIONS MEANT FOR A LOCAL CLASS 2 DRIVER.

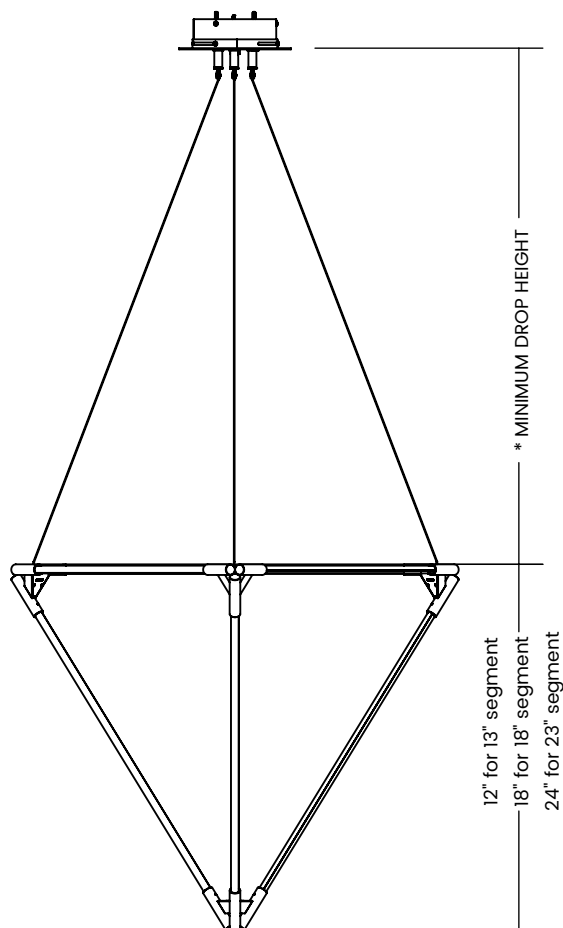*** MINIMUM DROP HEIGHT**

12" Segment : 12" Minimum drop height

18" Segment : 17" Minimum drop height

24" Segment : 22" Minimum drop height

STEP 1: ASSEMBLE LIGHT TUBES (ON THE GROUND)

1. Loosen the set screw on the connectors as shown
2. Insert light tubes into the connectors as shown in figure 1.
3. Tighten the set screw on the connector.

Do not suspend the fixture without tightening the set screws.

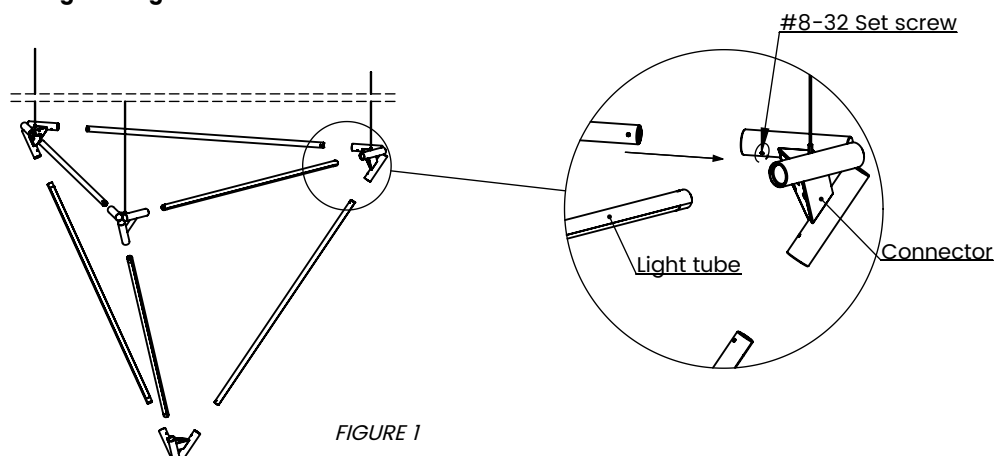


FIGURE 1

STEP 2: JUNCTION BOX COVER PLATE INSTALLATION INSTRUCTIONS

1

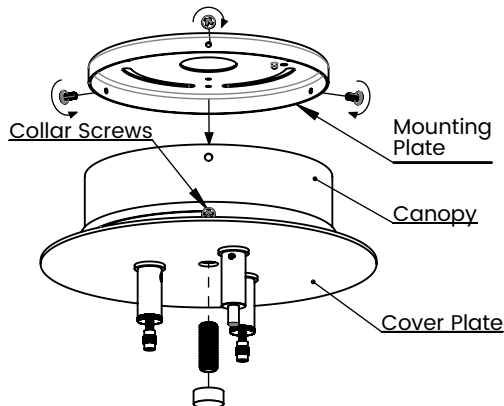


FIGURE 2

Remove screws from the canopy assembly to release the mounting plate. Cover plate can be rotated by loosening the collar screws.

2




FIGURE 3

Attach the mounting plate to the junction box using provided screws.

3

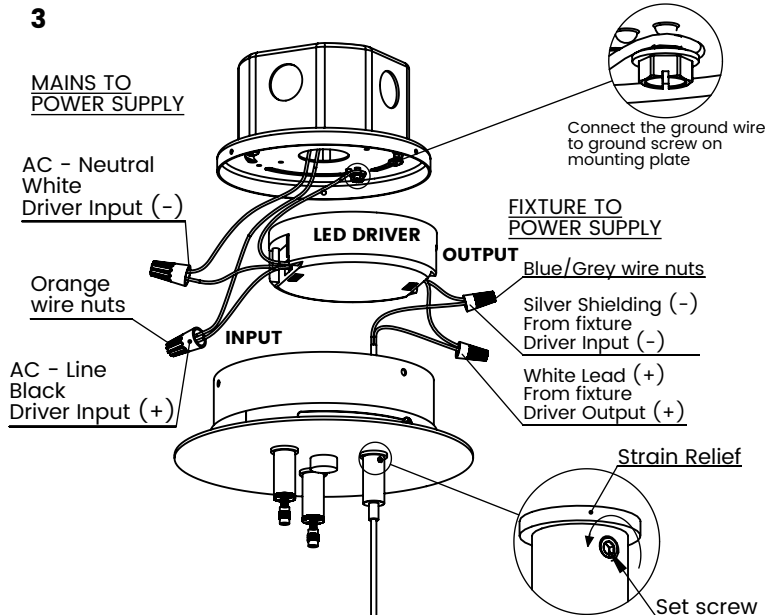


FIGURE 4

Loosen the set screw on the strain relief. Pass power cable, through strain relief as shown. Connect wires according to diagram (wire nuts provided). **AC wires to the driver are not provided.**

4

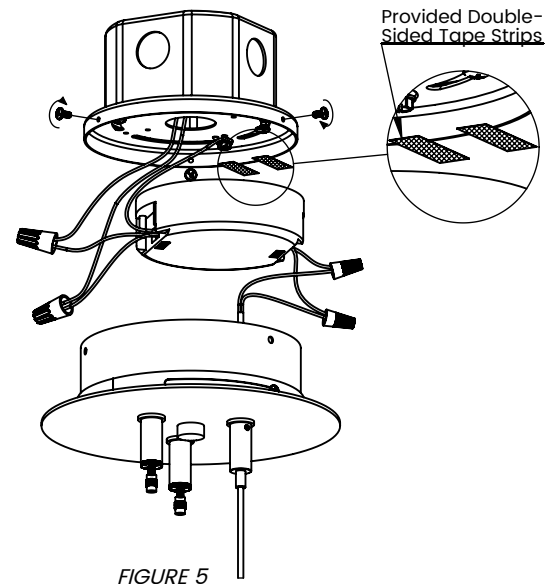


FIGURE 5

- A. Attach the LED Driver to mounting plate using provided double-sided tape.
B. Place a wire inside canopy and attach the canopy to mounting plate using screws removed during first instruction.

5




FIGURE 6

Feed aircraft cable of all passthrough sleeves through the grippers as shown above.

6

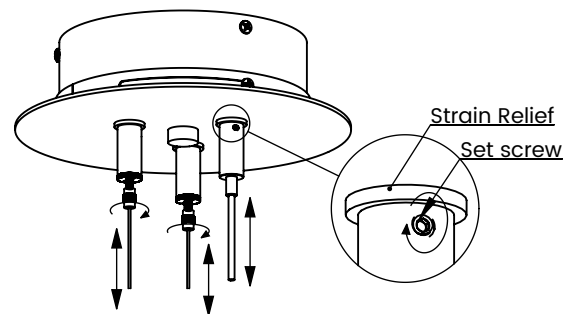


FIGURE 7

Adjust aircraft and power cable length as needed. Press safety nut on gripper to loosen aircraft cable. Tighten safety nut on gripper and set screw on strain relief completely when finished. **Do not cut extra aircraft cable until full fixture is assembled and desired suspension height is achieved.**

STEP 3: ADJUSTING THE LIGHT TUBES

1. Loosen the set screw on the connectors as shown.
Do not loosen set screws on all connectors simultaneously. Adjust only one light tube at a time.
2. Rotate the light tube to change the direction of the light.
3. Tighten the set screws on the connector.

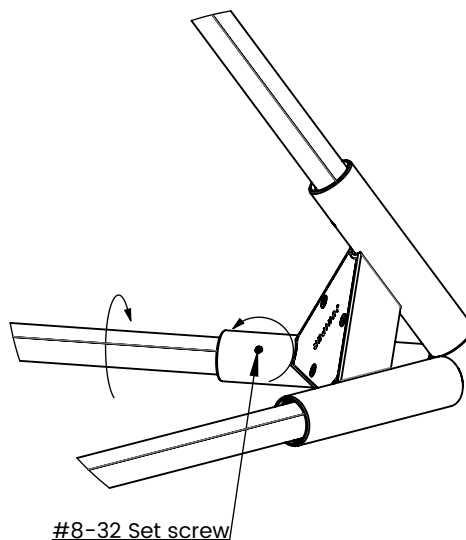


FIGURE 8

CARE INSTRUCTIONS

Brass will patina over time like other natural metals and regular care is required in order to retain the quality finish of your THIN fixture for years to come.

Gently wipe with a damp cloth to remove dirt, dust, and fingerprints.

Do not use any chemical cleaning solution.

Use indoors only.