



# JUNIPER<sup>®</sup> THIN LIGHTING SYSTEM

Modular & linear architectural lighting for residential and commercial environments.




## TABLE OF CONTENTS


4	THIN SUSPENSION
6	THIN VERTICAL SUSPENSION
8	THIN SURFACE MOUNT
12	THIN PRIMARIES TRIANGLE SUSPENSION
14	THIN PRIMARIES SQUARE SUSPENSION
16	THIN PRIMARIES RECTANGLE SUSPENSION
18	THIN PRIMARIES RHOMBUS SUSPENSION
20	THIN PRIMARIES HEXAGON SUSPENSION
22	THIN PRIMARIES OCTAGON SUSPENSION
24	THIN PRIMARIES TRIANGLE SURFACE MOUNT
26	THIN PRIMARIES SQUARE SURFACE MOUNT
28	THIN PRIMARIES RECTANGLE SURFACE MOUNT
30	THIN PRIMARIES RHOMBUS SURFACE MOUNT
32	THIN PRIMARIES HEXAGON SURFACE MOUNT
34	THIN PRIMARIES OCTAGON SURFACE MOUNT
36	THIN SOLIDS TETRAHEDRON
38	THIN SOLIDS CUBE
40	THIN SOLIDS DIAMOND
42	THIN MULTIPLES DYAD VERTICAL
44	THIN MULTIPLES DYAD HORIZONTAL
46	THIN MULTIPLES TRIAD
48	THIN MULTIPLES VERTICAL SUSPENSION TRIAD
50	THIN MULTIPLES TETRAD
52	THIN MULTIPLES VERTICAL SUSPENSION TETRAD
54	THIN SHARED TASK LAMP
58	FAQ & CARE INSTRUCTIONS
59	CONTACT




TECHNICAL | THIN Suspension

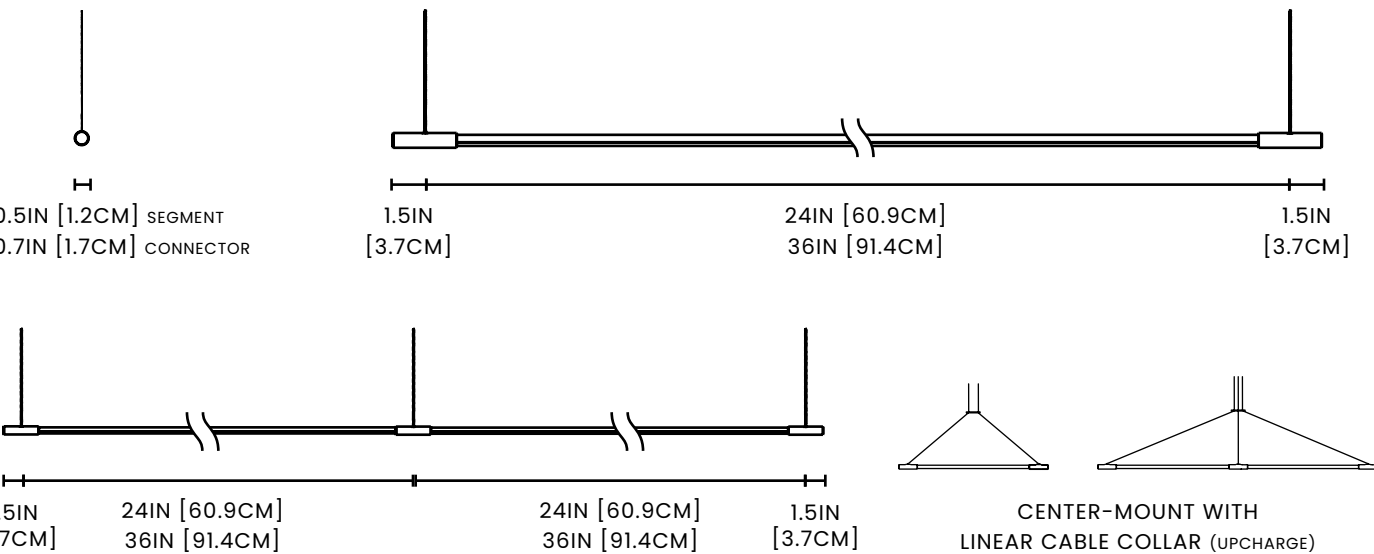


24IN AND 36IN LIGHT SEGMENTS MAY BE COMBINED IN THE SAME FIXTURE  
STANDARD MAX LENGTH PER FIXTURE IS (3) 36" LIGHT SEGMENTS 110.8IN [281.5CM]  
FOR LONGER RUNS, PLEASE CONTACT JUNIPER




FROSTED LENS  
90° BEAM ANGLE




LOCAL CANOPY  
7IN DIA X 2IN OR  
12.5IN DIA X 2IN  
(FOR 54W+)



JUNCTION BOX  
COVER PLATE  
5IN DIA X 0.5IN



MINI CANOPY  
(OPTIONAL)  
1.25IN DIA X  
1.125IN



CABLE COLLAR  
(OPTIONAL)  
3.25IN X 0.75IN

ILLUMINATION

CRI 95+, R9 90+ standard  
2700K, 3000K, 3500K, 4000K options  
**24" segment** 600LM delivered  
6.8W/segment  
**36" segment** 920LM delivered  
9.6W/segment  
90LM/W  
50,000 hrs LED life L80

POWER

24VDC output Class 2 constant  
voltage power supply  
120VAC or 220V input voltage for local  
power supplies  
Universal 120VAC-277VAC for remote  
power supply

FINISHES

Satin Brass, Black Oxide, Satin Nickel

MATERIALS

Solid brass, PMMA

DIMMING

2-Wire/TRIAC/Forward Phase  
0-10V  
3-Wire  
See Power Supply section for details  
Contact Juniper for alternate  
requirements

MOUNTING

10ft 1/16" aircraft cable, field  
adjustable  
16ft Clear-jacketed 22AWG co-axial  
silver cord, field adjustable  
Direct-mounting and center-  
mounting with Linear Cable Collar  
options available (for up to 2  
connected segments)

SYSTEM RUN

Limited by power supply wattage only



Designed by Peter Bristol & Juniper

BUILD A SPECIFICATION | THIN Suspension

SERIES

JPR-THES

-

FINISH

0

-

SEGMENTS

-

COLOR TEMP

-

LENS

F

-

POWER SUPPLY

-

MOUNTING

-

POWER FEED

P

**SAMPLE SKU: JPR-THES-01-00333-30-F-R-DM-CP**  
Satin Brass, (3) connected 36" segments, 3000K, frosted lens, remote  
power supply, direct-mount to ceiling with a center power feed

CODE DEFINITIONS

FINISHES



01 Satin Brass 02 Black Oxide 03 Satin Nickel

SEGMENTS

- 0 No Segment
- 2 24 inch segment - 600LM delivered / 6.8W
- 3 36 inch segment - 920LM delivered / 9.6W

Each digit represents a single segment, e.g. 00002 is (1) 24" segment. Contact Juniper for custom segment lengths.

COLOR TEMPERATURE

- 27 2700K
- 30 3000K
- 35 3500K
- 40 4000K

LENS

- F Frosted - 90° beam angle

MOUNTING

- CX** Center-Mount to Canopy without Cable Collar  
Includes corresponding canopy
- CC** Center-Mount to Canopy with Cable Collar (upcharge)  
Includes corresponding canopy
- DM** Direct-Mount to Ceiling  
Includes corresponding canopy for a single power  
cord with ceiling grippers for other mounting points

POWER SUPPLY OPTIONS

R. REMOTE

STANDARD 120-277V INPUT - 2-WIRE/TRIAC/FORWARD  
PHASE/ELV

STANDARD 120-277V INPUT - 0-10V

LUTRON 120V INPUT - TRIAC DIMMING (40W ) (UPCHARGE)

LUTRON 120-277V INPUT - 3-WIRE (UPCHARGE)

L. LOCAL

STANDARD 120-277V INPUT - TRIAC/0-10V/ELV DIMMING


Our team will determine correct wattages for power supplies  
based on chosen configuration. Contact Juniper for custom  
requirements or further power supply specifications.

POWER FEED

- EP** End Power Feed  
Located at the end of the fixture
- CP** Center Power Feed  
Optional for 2+ Connected Segments

Project	Type
Notes	

TECHNICAL | THIN Vertical Suspension

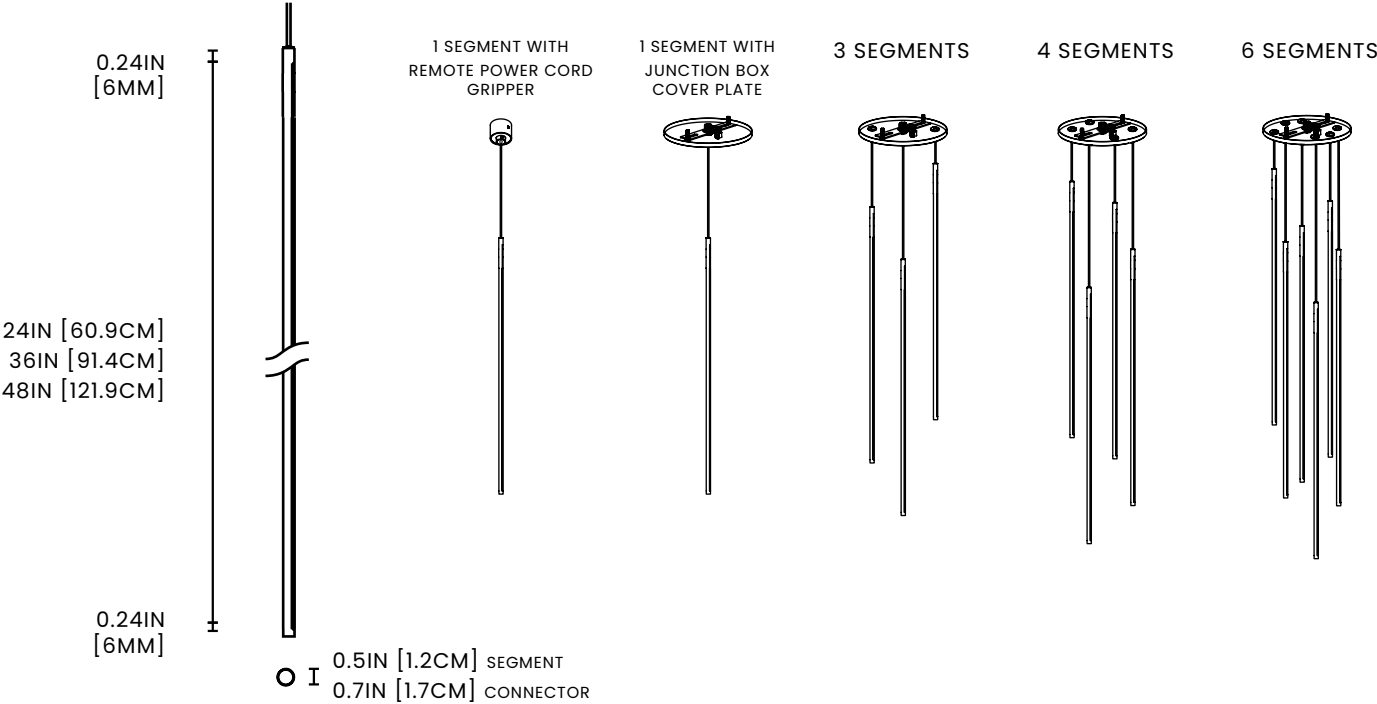

**FROSTED LENS**  
90° BEAM ANGLE

**LOCAL CANOPY**  
7IN DIA X 2IN OR  
12.5IN DIA X 2IN  
(FOR >54W)

**JUNCTION BOX COVER PLATE**  
5IN DIA X 0.5IN

**MINI CANOPY (OPTIONAL)**  
1.25IN DIA X  
1.125IN

<b>ILLUMINATION</b> CRI 95+, R9 90+ standard 2700K, 3000K, 3500K, 4000K options <b>24" segment</b> 600LM delivered 6.8W/segment <b>36" segment</b> 920LM delivered 9.6W/segment <b>48" segment</b> 1227LM delivered 13.6W/segment 90LM/W 50,000 hrs LED life L80	<b>FINISHES</b> Satin Brass, Black Oxide, Satin Nickel	<b>MOUNTING</b> 10ft 1/16" aircraft cable, field adjustable 16ft Clear-jacketed 22AWG co-axial silver cord, field adjustable All segments installed together on a single canopy For individual canopies, SKU a single segment and order in duplicates
<b>POWER</b> 24VDC output Class 2 constant voltage power supply 120VAC input voltage Contact Juniper for alternate inputs	<b>MATERIALS</b> Solid brass, PMMA	<b>SYSTEM RUN</b> Limited to one aircraft cable per segment Contact us for custom configurations
<b>DIMMING</b> 2-Wire/TRIAC/Forward Phase 0-10V 3-Wire See Power Supply section for details Contact Juniper for alternate requirements		

UL ENEC CE FCC DAMP RATED ADA COMPLIANT

Designed by Peter Bristol & Juniper

BUILD A SPECIFICATION | THIN Vertical Suspension

SERIES

JPR-THEV

-

FINISH

0

-

SEGMENTS

-

COLOR TEMP

-

LENS

F

-

POWER SUPPLY

-

MOUNTING

C

X


**SAMPLE SKU: JPR-THEV-01-000222-30-F-R-CX**  
Satin Brass, (3) 24" segments, 3000K, frosted lens, local power supply, mounted to canopy

<b>CODE DEFINITIONS</b>	<b>POWER SUPPLY OPTIONS</b>
<b>FINISHES</b>  <b>01</b> Satin Brass  <b>02</b> Black Oxide  <b>03</b> Satin Nickel	<b>R. REMOTE</b> STANDARD 120-277V INPUT - 2-WIRE/TRIAC/FORWARD PHASE/ELV STANDARD 120-277V INPUT - 0-10V LUTRON 120V INPUT - TRIAC DIMMING (40W ) (UPCHARGE) LUTRON 120-277V INPUT - 3-WIRE (UPCHARGE)
<b>SEGMENTS</b> <b>0</b> No Segment <b>2</b> 24 inch segment - 600LM delivered / 6.8W <b>3</b> 36 inch segment - 920LM delivered / 9.6W <b>4</b> 48 inch segment - 1227LM delivered / 13.6W Each digit represents a single segment, e.g. 000023 is (1) 24" segment and (1) 36" segment. Contact Juniper for custom segment lengths.	<b>L. LOCAL</b> STANDARD 120-277V INPUT - TRIAC/0-10V/ELV DIMMING
<b>COLOR TEMPERATURE</b> <b>27</b> 2700K <b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K	
<b>LENS</b> <b>F</b> Frosted - 90° beam angle	
<b>MOUNTING</b> <b>CX</b> Mounted to Canopy Includes one corresponding canopy for all segments	


Our team will determine correct wattages for power supplies based on chosen configuration. Contact Juniper for custom requirements or further power supply specifications.

Project	Type
Notes	


TECHNICAL | THIN Surface Mount

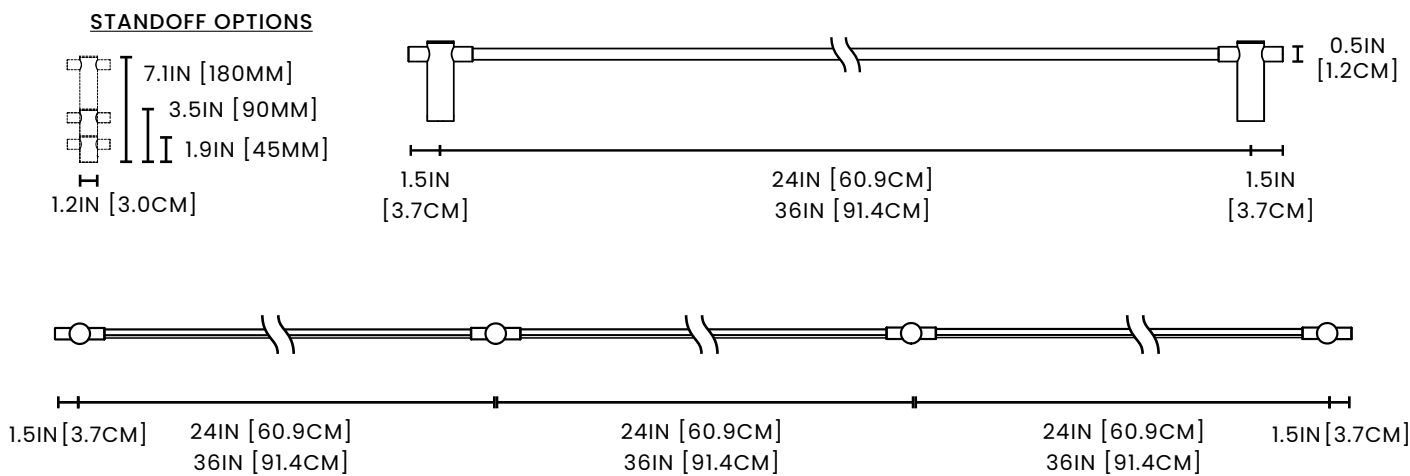


24IN AND 36IN LIGHT SEGMENTS MAY BE COMBINED IN THE SAME FIXTURE  
STANDARD MAX LENGTH PER FIXTURE IS (3) 36" LIGHT SEGMENTS 110.8IN [281.5CM]  
[FOR LONGER RUNS, PLEASE CONTACT US](#)



FROSTED LENS  
90° BEAM ANGLE

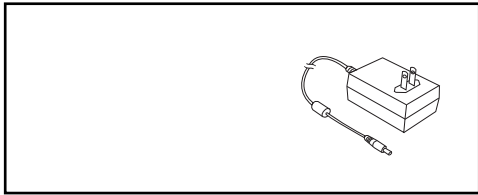

OPTIONAL PLUG-IN POWER SUPPLY WITH  
IN-LINE TOUCH DIMMER & 3-METER CORD



<b>ILLUMINATION</b> CRI 95+, R9 90+ standard 2700K, 3000K, 3500K, 4000K options  <b>24" segment</b> 600LM delivered / 6.8W <b>36" segment</b> 920LM delivered / 9.6W 90LM/W 50,000 hrs LED life L80	<b>FINISHES</b> Satin Brass, Black Oxide, Satin Nickel  <b>MATERIALS</b> Solid brass, PMMA  <b>DIMMING</b> 2-Wire/TRIAC/Forward Phase 0-10V 3-Wire See Power Supply section for details Contact Juniper for alternate requirements	<b>MOUNTING</b> Wall brackets mount directly to surface  <b>SYSTEM RUN</b> Limited by power supply wattage only 2 X 18AWG in-wall rated cable recommended for remote power supply installation (provided by electrician)
<b>POWER</b> 120VAC Input Voltage 24VDC Class 2 Constant Voltage Contact Juniper for alternate inputs		

BUILD A SPECIFICATION | THIN Surface Mount

SERIES

JPR-THEW

-

FINISH

0

-

SEGMENTS

000

-

STANDOFFS

-

COLOR TEMP

-

LENS

F

-

POWER SUPPLY

**SAMPLE SKU: JPR-THEW-01-000222-090-30-C-R**  
Satin Brass, (3) 24" segments, 90mm standoffs, 3000K, clear lens, remote power supply

CODE DEFINITIONS

FINISHES



01 Satin Brass 02 Black Oxide 03 Satin Nickel

SEGMENTS

- 0 no segment
  - 2 24 inch segment - 600LM delivered / 6.8W
  - 3 36 inch segment - 920LM delivered / 9.6W
- Note:* each digit represents a single segment, e.g. 000023 is (1) 24" segment and (1) 36" segment, 0000333 is (3) 36" segments

Contact Juniper for custom segment lengths

STANDOFF LENGTH

- 045 45mm Standoffs - for undercabinet
- 090 90mm Standoffs - for vanity and display lighting
- 180 180mm Standoffs - for picture lighting

COLOR TEMPERATURE

- 27 2700K
- 30 3000K
- 35 3500K
- 40 4000K

LENS

- F Frosted - 90° beam angle

POWER SUPPLY OPTIONS


R. REMOTE

- STANDARD 120-277V INPUT - 2-WIRE/TRIAC/FORWARD PHASE/ELV
- STANDARD 120-277V INPUT - 0-10V
- LUTRON 120V INPUT - TRIAC DIMMING (40W ) (UPCHARGE)
- LUTRON 120-277V INPUT - 3-WIRE (UPCHARGE)


P. PLUG-IN

- 24VDC, 1.67A POWER SUPPLY



Project	Type
Notes	

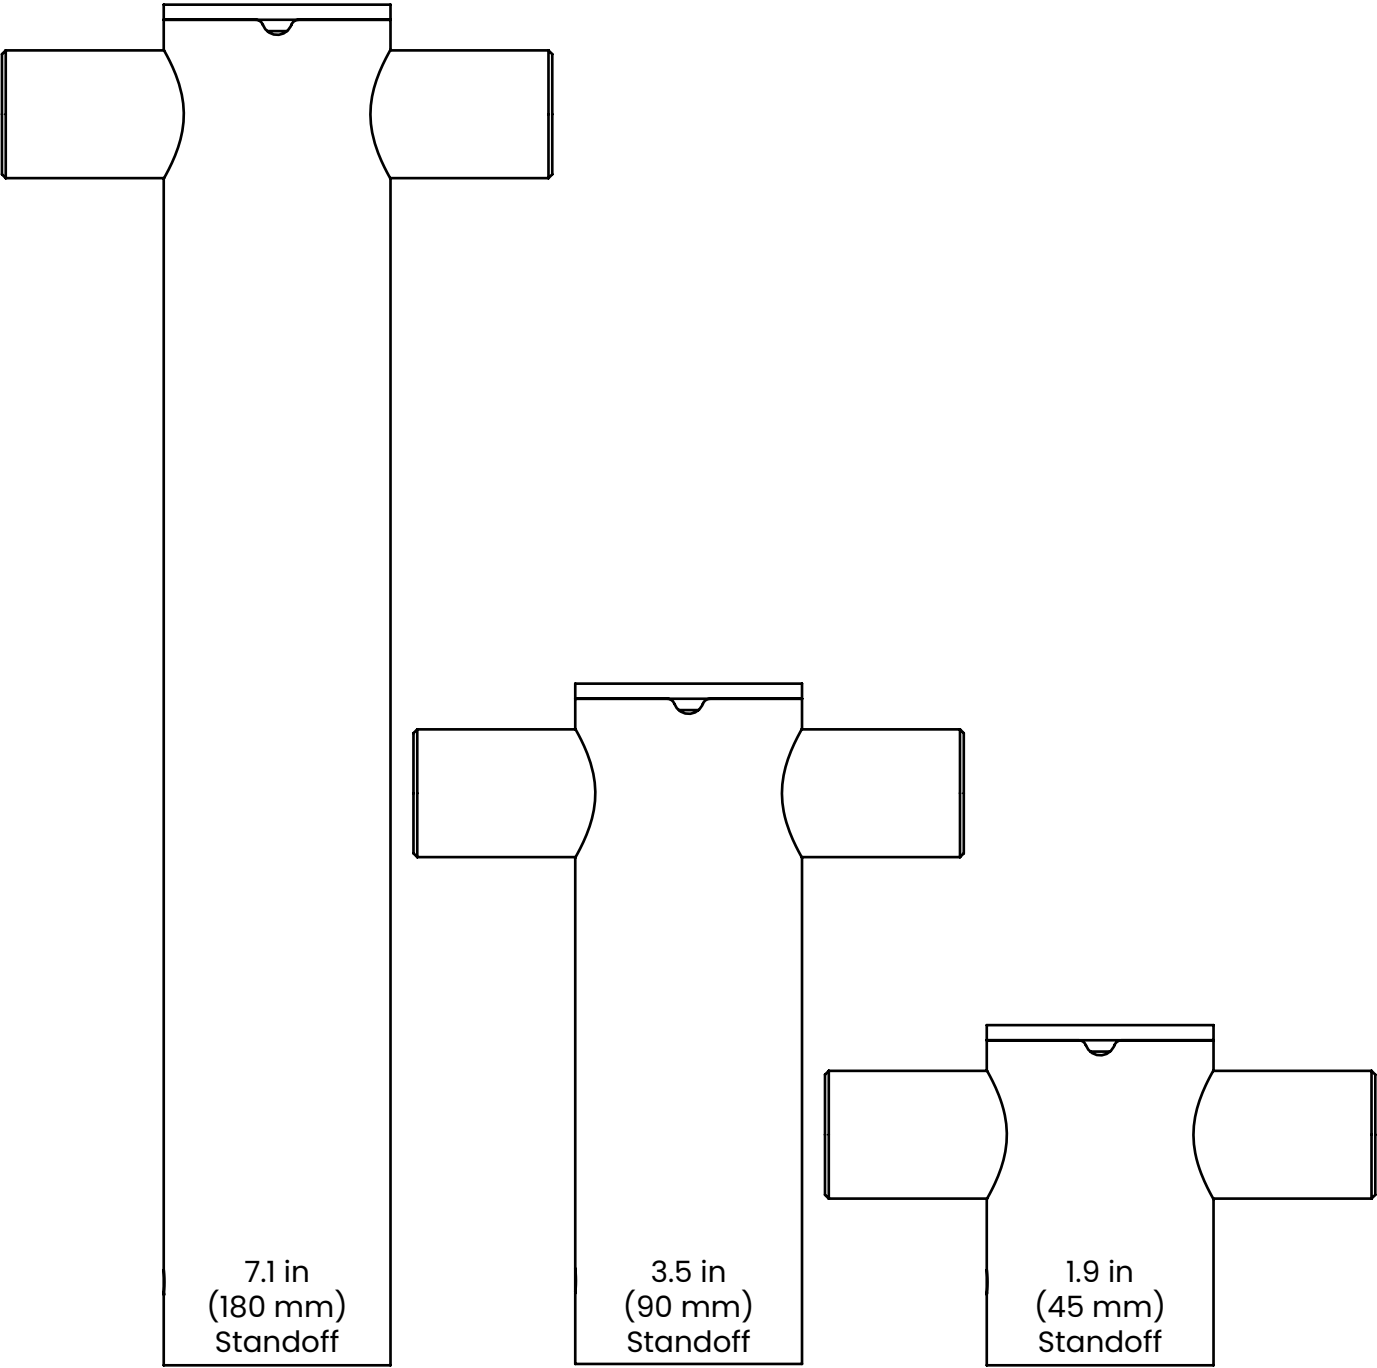


Use the following two pages to visualize your desired standoff height. Our drawings are to-scale and easily printable to help envision our three standoff heights. While this page shows a simple 2D to-scale drawing, you can get creative and assemble 3D models from the template shown on the next page.

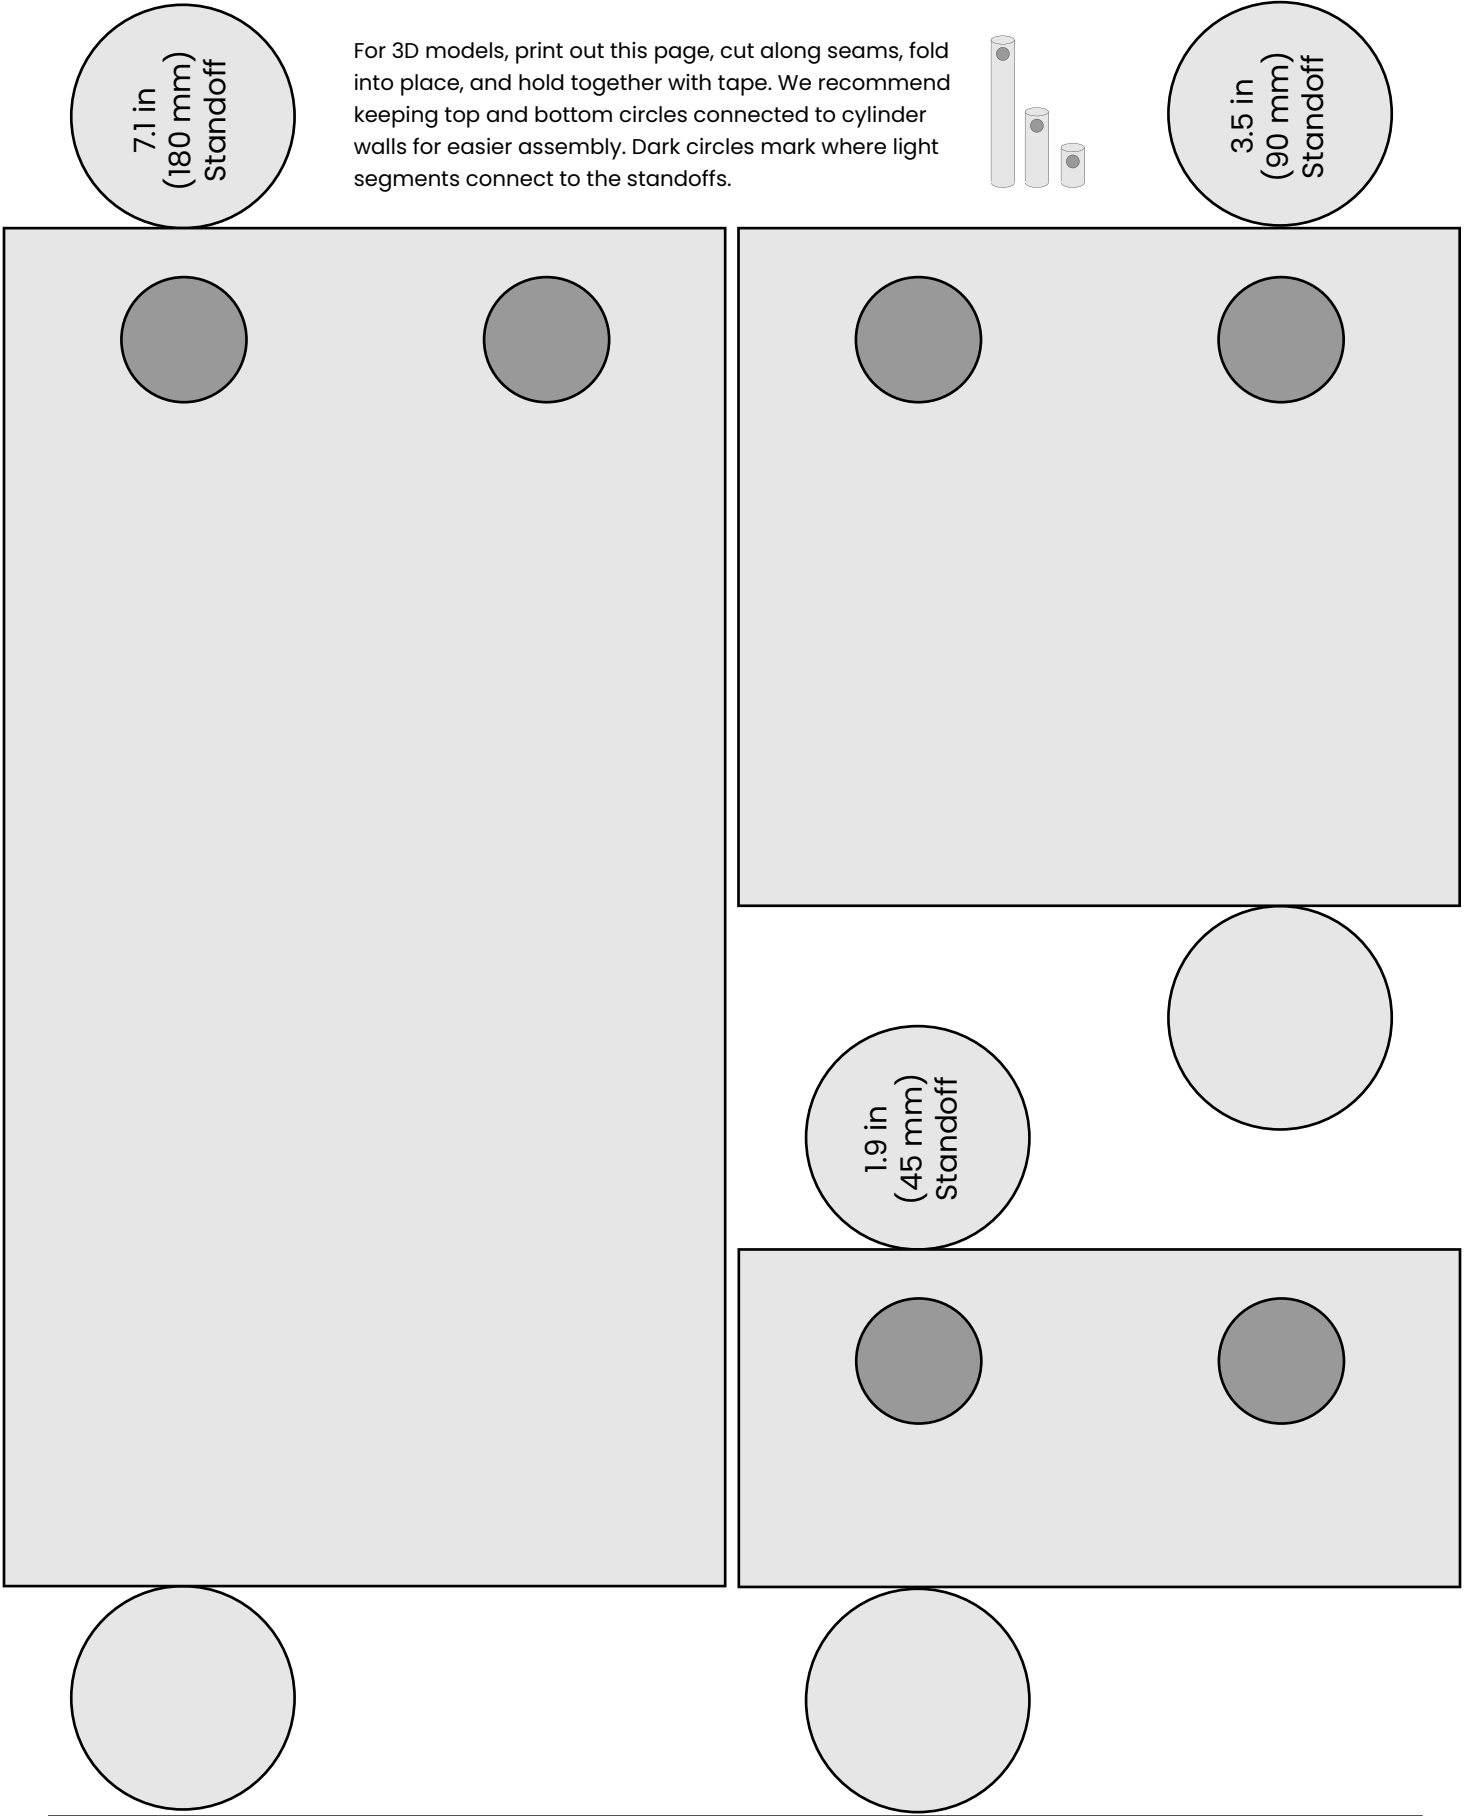


TECHNICAL | THIN Single Float

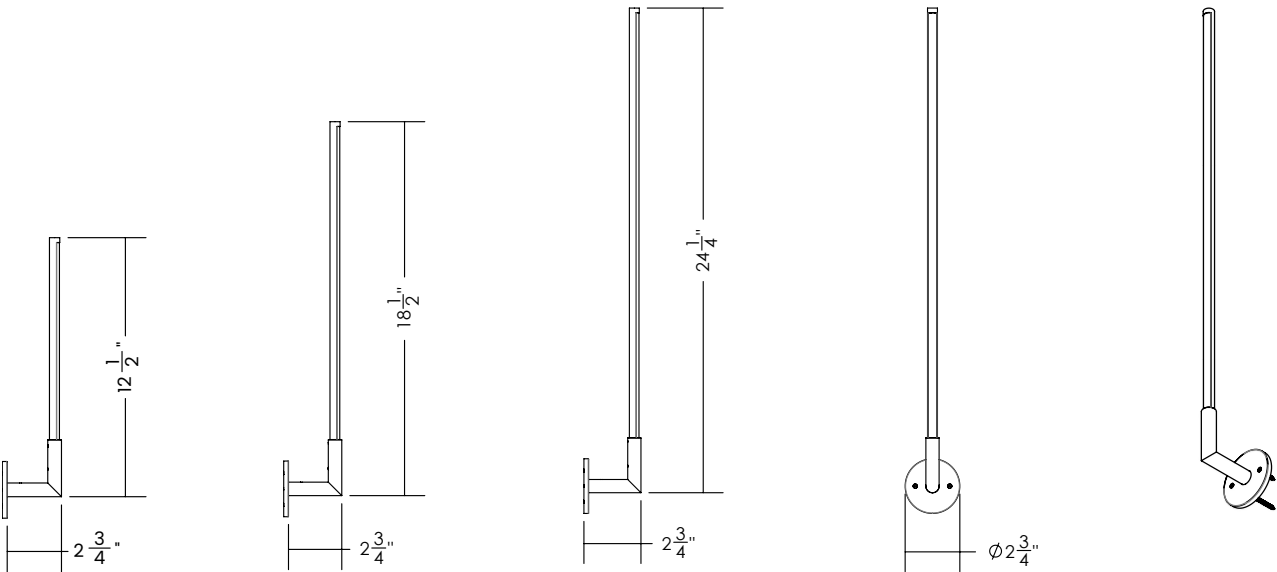

FROSTED LENS  
90° BEAM ANGLE



REMOTE PLATE  
2.75IN DIA X .25IN



JUNCTION BOX  
COVER PLATE  
4.75IN DIA X 0.5IN

**ILLUMINATION**

CRI 95+, R9 90+ standard  
2700K, 3000K, 3500K, 4000K options

**12" segment** 300LM delivered / 3.4W  
**18" segment** 450LM delivered / 5.1W  
**24" segment** 600LM delivered / 6.8W  
90LM/W  
50,000 hrs LED life L80

**POWER**

120VAC Input Voltage  
24VDC Class 2 Constant Voltage  
Contact Juniper for alternate inputs

**FINISHES**

Satin Brass, Black Oxide, Satin Nickel

**MATERIALS**

Solid brass, PMMA

**DIMMING**

2-Wire/TRIAC/Forward Phase/ELV  
0-10V  
3-Wire  
See Power Supply section for details  
Contact Juniper for alternate requirements

**MOUNTING**

Wall brackets mount directly to surface

**SYSTEM RUN**

Limited by power supply wattage only  
2 X 18AWG in-wall rated cable  
recommended for remote power  
supply installation (provided by  
electrician)

BUILD A SPECIFICATION | THIN Single Float

SERIES

JPR-FLO

-

FINISH

0

-

CONFIGURATION

S

-

SEGMENT SIZE

-

COLOR TEMP

-

LENS

F

-

POWER SUPPLY

-

MOUNTING

**SAMPLE SKU: JPR-FLO-01-S-12-30-F-R-W**  
Satin Brass, 12" segment, 3000K, frosted lens, remote power supply, 2.75" wall mount plate

CODE DEFINITIONS

FINISHES

**01** Satin Brass

**02** Black Oxide

**03** Satin Nickel

SEGMENTS

- 12** 12 inch segment - 300LM delivered / 3.4W
- 18** 18 inch segment - 450LM delivered / 5.1W
- 24** 24 inch segment - 600LM delivered / 6.8W

MOUNTING

- J** 4.75" Junction box cover plate
- W** 2.75" Remote plate

COLOR TEMPERATURE

- 27** 2700K
- 30** 3000K
- 35** 3500K
- 40** 4000K

LENS

- F** Frosted - 90° beam angle

POWER SUPPLY OPTIONS

R. REMOTE



- STANDARD 120-277V INPUT - 2-WIRE/TRIAC/FORWARD PHASE/ELV
- STANDARD 120-277V INPUT - 0-10V
- LUTRON 120V INPUT - TRIAC DIMMING (40W ) (UPCHARGE)
- LUTRON 120-277V INPUT - 3-WIRE (UPCHARGE)

L. LOCAL


- STANDARD 120-277V INPUT - TRIAC/0-10V/ELV DIMMING

Project	Type
Notes	


TECHNICAL | THIN Retro Float

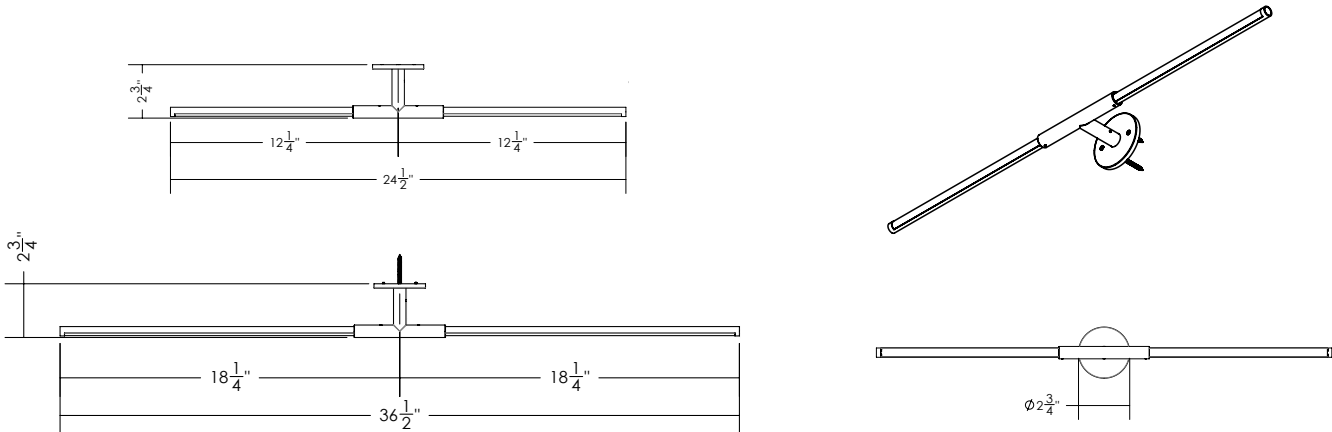

FROSTED LENS  
90° BEAM ANGLE



REMOTE PLATE  
2.75IN DIA X .25IN



JUNCTION BOX  
COVER PLATE  
4.75IN DIA X 0.5IN

ILLUMINATION

CRI 95+, R9 90+ standard  
2700K, 3000K, 3500K, 4000K options

**2x12" segment** 600LM delivered / 6.8W  
**2x18" segment** 900LM delivered / 10.2W  
90LM/W  
50,000 hrs LED life L80

POWER

120VAC Input Voltage  
24VDC Class 2 Constant Voltage  
Contact Juniper for alternate inputs

FINISHES

Satin Brass, Black Oxide, Satin Nickel

MATERIALS

Solid brass, PMMA

DIMMING

2-Wire/TRIAC/Forward Phase/ELV  
0-10V  
3-Wire  
See Power Supply section for details  
Contact Juniper for alternate  
requirements

MOUNTING

Wall brackets mount directly to  
surface

SYSTEM RUN

Limited by power supply wattage only  
2 X 18AWG in-wall rated cable  
recommended for remote power  
supply installation (provided by  
electrician)

BUILD A SPECIFICATION | THIN Single Float

SERIES	FINISH	CONFIGURATION	SEGMENT SIZE	COLOR TEMP	LENS	POWER SUPPLY	MOUNTING
JPR-FLO	0	R			F		

**SAMPLE SKU: JPR-FLO-01-R-12-30-F-R-W**  
Satin Brass, 12" segment, 3000K, frosted lens, remote power supply, 2.75" wall mount plate

CODE DEFINITIONS

FINISHES



01 Satin Brass 02 Black Oxide 03 Satin Nickel

SEGMENTS

**12** 12 inch segment - 300LM delivered / 3.4W  
**18** 18 inch segment - 450LM delivered / 5.1W  
**24** 24 inch segment - 600LM delivered / 6.8W

MOUNTING

**J** 4.75" Junction box cover plate  
**W** 2.75" Remote plate

COLOR TEMPERATURE

**27** 2700K  
**30** 3000K  
**35** 3500K  
**40** 4000K

LENS

**F** Frosted - 90° beam angle

POWER SUPPLY OPTIONS

R. REMOTE

STANDARD 120-277V INPUT - 2-WIRE/TRIAC/FORWARD  
PHASE/ELV

STANDARD 120-277V INPUT - 0-10V

LUTRON 120V INPUT - TRIAC DIMMING (40W ) (UPCHARGE)

LUTRON 120-277V INPUT - 3-WIRE (UPCHARGE)



L. LOCAL

STANDARD 120-277V INPUT - TRIAC/0-10V/ELV DIMMING

Project	Type
Notes	



TECHNICAL | THIN Primaries Triangle Suspension

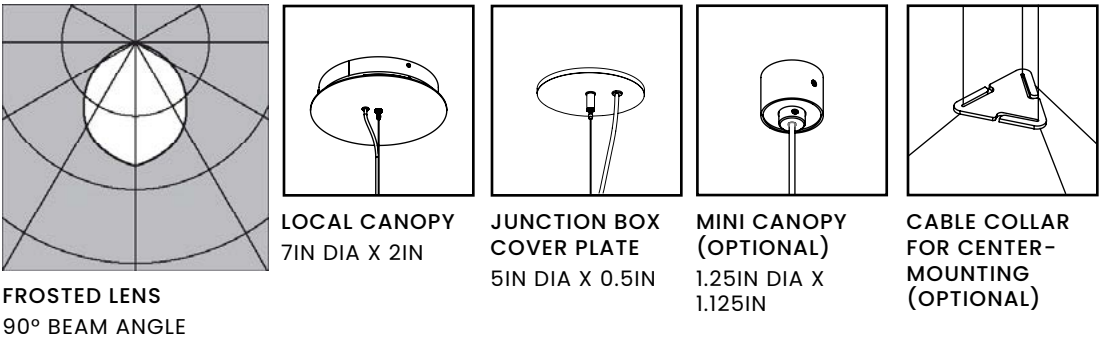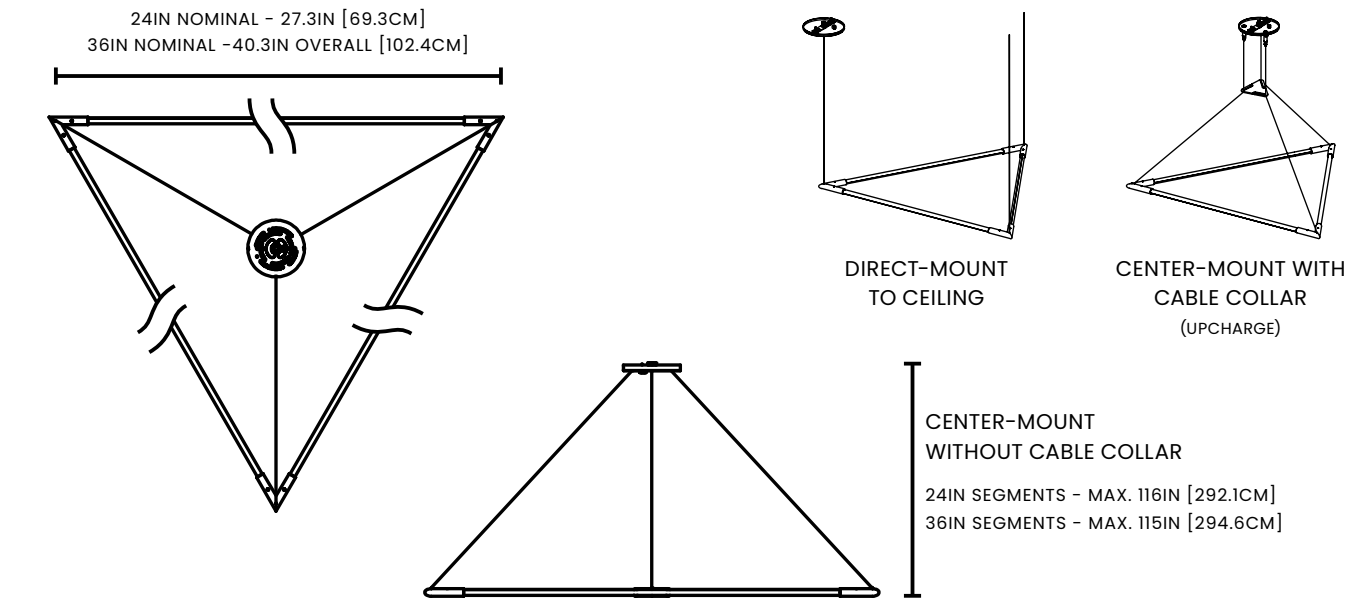

<b>ILLUMINATION</b> CRI 95+, R9 90+ standard 2700K, 3000K, 3500K, 4000K options  <b>24" segment</b> 1800LM delivered / 20.4W <b>36" segment</b> 2760LM delivered / 28.8W 90LM/W 50,000 hrs LED life L80	<b>FINISHES</b> Satin Brass, Black Oxide, Satin Nickel  <b>MATERIALS</b> Solid brass, PMMA  <b>DIMMING</b> 2-Wire/TRIAC/Forward Phase 0-10V 3-Wire See Power Supply section for details Contact Juniper for alternate requirements	<b>MOUNTING</b> (x3) 1/16" aircraft cables, field adjustable 16ft Clear-jacketed 22AWG co-axial silver cord, field adjustable Direct-mounting and center-mounting options available Cable Collar in matching finish optional for center mounting  <b>SYSTEM RUN</b> Limited by power supply wattage only
--	--	---

BUILD A SPECIFICATION | THIN Primaries Triangle Suspension

SERIES	FINISH	CONFIGURATION	SEGMENTS	COLOR TEMP	LENS	POWER SUPPLY	MOUNTING
JPR-THES	0	TRI	X X		F		
			2 OR 3				

**SAMPLE SKU: JPR-THES-02-TRI-2-27-C-R-CC**  
Black Oxide, 24" segments, 2700K, clear lens, remote power supply, center-mount to a canopy with a cable collar

**CODE DEFINITIONS**



<b>FINISHES</b>  <b>01</b> Satin Brass  <b>02</b> Black Oxide  <b>03</b> Satin Nickel	<b>POWER SUPPLY OPTIONS</b>  <b>R. REMOTE</b>  STANDARD 120-277V INPUT - 2-WIRE/TRIAC/FORWARD PHASE/ELV  STANDARD 120-277V INPUT - 0-10V  LUTRON 120V INPUT - TRIAC DIMMING (40W ) (UPCHARGE)  LUTRON 120-277V INPUT - 3-WIRE (UPCHARGE)  <b>L. LOCAL</b>  STANDARD 120-277V INPUT - TRIAC/0-10V/ELV DIMMING
<b>SEGMENTS</b> <b>2</b> 24 inch - 1800LM delivered / 20.4W <b>3</b> 36 inch - 2760LM delivered / 28.8W Contact Juniper for custom segment lengths	
<b>COLOR TEMPERATURE</b> <b>27</b> 2700K <b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K	
<b>LENS</b> <b>F</b> Frosted - 90° beam angle	

<b>MOUNTING</b> <b>CX</b> Center-Mount to Canopy without Cable Collar Includes corresponding canopy <b>CC</b> Center-Mount to Canopy with Cable Collar (upcharge) Includes corresponding canopy <b>DM</b> Direct-Mount to Ceiling Includes corresponding canopy for a single power cord with ceiling grippers for other mounting points
---


Our team will determine correct wattages for power supplies based on chosen configuration. Contact Juniper for custom requirements or further power supply specifications.

Project	Type
Notes	


TECHNICAL | THIN Primaries Square Suspension

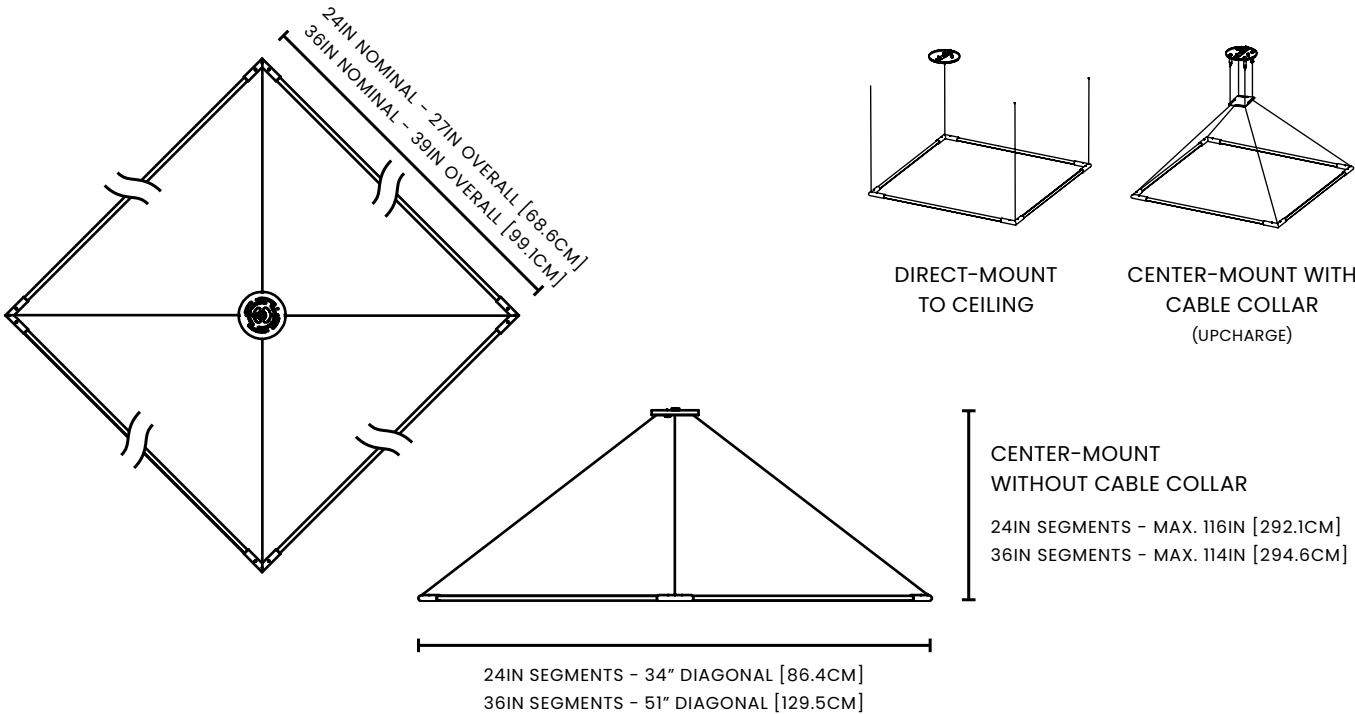


FROSTED LENS  
90° BEAM ANGLE




LOCAL CANOPY  
7IN DIA X 2IN



JUNCTION BOX  
COVER PLATE  
5IN DIA X 0.5IN



MINI CANOPY  
(OPTIONAL)  
1.25IN DIA X  
1.125IN



CABLE COLLAR  
(OPTIONAL)  
3IN X 3IN

ILLUMINATION

CRI 95+, R9 90+ standard  
2700K, 3000K, 3500K, 4000K options

**24" segment** 2400LM / 27.2W  
**36" segment** 3680LM / 38.4W  
90LM/W  
50,000 hrs LED life L80

POWER

24VDC output Class 2 constant  
voltage power supply  
120VAC input voltage  
Contact Juniper for alternate inputs

FINISHES

Satin Brass, Black Oxide, Satin Nickel

MATERIALS

Solid brass, PMMA

DIMMING

2-Wire/TRIAC/Forward Phase  
0-10V  
3-Wire  
See Power Supply section for details  
Contact Juniper for alternate  
requirements

MOUNTING

(x4) 1/16" aircraft cables, field  
adjustable  
16ft Clear-jacketed 22AWG co-axial  
silver cord, field adjustable  
Direct-mounting and center-  
mounting options available  
Cable Collar in matching finish  
optional for center mounting

SYSTEM RUN

Limited by power supply wattage only

BUILD A SPECIFICATION | THIN Primaries Square Suspension

SERIES	FINISH	CONFIGURATION	SEGMENTS	COLOR TEMP	LENS	POWER SUPPLY	MOUNTING
JPR-THES	0	SQR	X X		F		
			2 OR 3				

**SAMPLE SKU: JPR-THES-01-SQR-3-30-F-R-CX**  
Satin Brass, 36" segments, 3000K, frosted lens, remote power supply, center-mount to canopy without a cable collar

CODE DEFINITIONS

FINISHES



01 Satin Brass



02 Black Oxide



03 Satin Nickel

SEGMENTS

**2** 24 inch - 2400LM delivered / 27.2W  
**3** 36 inch - 3680LM delivered / 38.4W

Contact Juniper for custom segment lengths

COLOR TEMPERATURE

**27** 2700K  
**30** 3000K  
**35** 3500K  
**40** 4000K

LENS

**F** Frosted - 90° beam angle

MOUNTING

**CX** Center-Mount to Canopy without Cable Collar  
Includes corresponding canopy  
**CC** Center-Mount to Canopy with Cable Collar (upcharge)  
Includes corresponding canopy  
**DM** Direct-Mount to Ceiling  
Includes corresponding canopy for a single power  
cord with ceiling grippers for other mounting points

POWER SUPPLY OPTIONS

R. REMOTE

STANDARD 120-277V INPUT - 2-WIRE/TRIAC/FORWARD  
PHASE/ELV

STANDARD 120-277V INPUT - 0-10V

LUTRON 120V INPUT - TRIAC DIMMING (40W ) (UPCHARGE)

LUTRON 120-277V INPUT - 3-WIRE (UPCHARGE)



L. LOCAL

STANDARD 120-277V INPUT - TRIAC/0-10V/ELV DIMMING

Our team will determine correct wattages for power supplies  
based on chosen configuration. Contact Juniper for custom  
requirements or further power supply specifications.

Project	Type
Notes	

TECHNICAL | THIN Primaries Rectangle Suspension

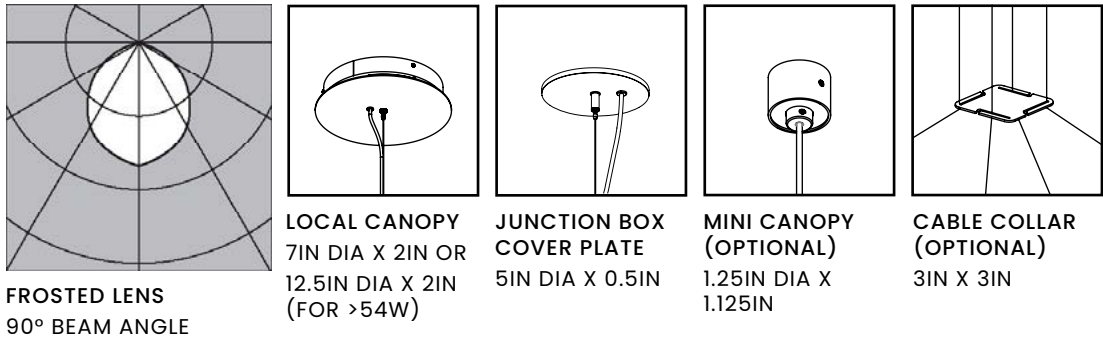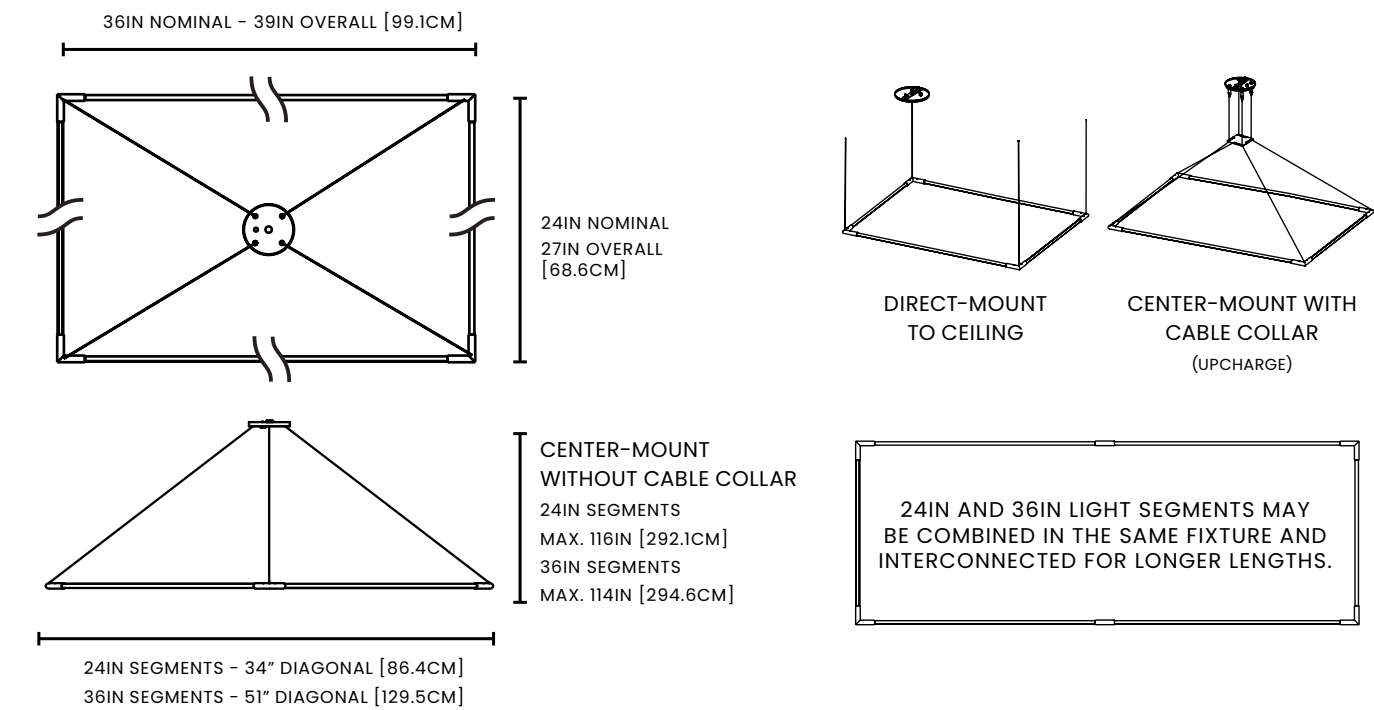

<b>ILLUMINATION</b> CRI 95+, R9 90+ standard 2700K, 3000K, 3500K, 4000K options  <b>24" segment</b> 600LM delivered 6.8W/segment <b>36" segment</b> 920LM delivered 9.6W/segment 90LM/W 50,000 hrs LED life L80	<b>FINISHES</b> Satin Brass, Black Oxide, Satin Nickel  <b>MATERIALS</b> Solid brass, PMMA  <b>DIMMING</b> 2-Wire/TRIAC/Forward Phase 0-10V 3-Wire See Power Supply section for details Contact Juniper for alternate requirements	<b>MOUNTING</b> (x4) 1/16" aircraft cables, field adjustable 16ft Clear-jacketed 22AWG co-axial silver cord, field adjustable Direct-mounting and center-mounting options available Cable Collar in matching finish optional for center mounting  <b>SYSTEM RUN</b> Limited by power supply wattage only
--	---	---

BUILD A SPECIFICATION | THIN Primaries Rectangle

**CONTACT US TO SKU THIS CUSTOM FIXTURE**  
CALL: +1-347-799-2915 | EMAIL: SALES@JUNIPER-DESIGN.COM



<b>CODE DEFINITIONS</b>	<b>POWER SUPPLY OPTIONS</b>
<b>FINISHES</b>  <b>01</b> Satin Brass <b>02</b> Black Oxide <b>03</b> Satin Nickel	<b>R. REMOTE</b>  STANDARD 120-277V INPUT - 2-WIRE/TRIAC/FORWARD PHASE/ELV  STANDARD 120-277V INPUT - 0-10V  LUTRON 120V INPUT - TRIAC DIMMING (40W ) (UPCHARGE)  LUTRON 120-277V INPUT - 3-WIRE (UPCHARGE)  <b>L. LOCAL</b>  STANDARD 120-277V INPUT - TRIAC/0-10V/ELV DIMMING
<b>SEGMENTS</b> <b>2</b> 24 inch - 600LM delivered - 6.8W/segment <b>3</b> 36 inch - 920LM delivered - 9.6W /segment Contact Juniper for custom segment lengths	
<b>COLOR TEMPERATURE</b> <b>27</b> 2700K <b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K	
<b>LENS</b> <b>F</b> Frosted - 90° beam angle	

<b>MOUNTING</b> <b>CX</b> Center-Mount to Canopy without Cable Collar Includes corresponding canopy <b>CC</b> Center-Mount to Canopy with Cable Collar (upcharge) Includes corresponding canopy <b>DM</b> Direct-Mount to Ceiling Includes corresponding canopy for a single power cord with ceiling grippers for other mounting points
---

Our team will determine correct wattages for power supplies based on chosen configuration. Contact Juniper for custom requirements or further power supply specifications.


Project	Type
Notes	

TECHNICAL | THIN Primaries Rhombus Suspension

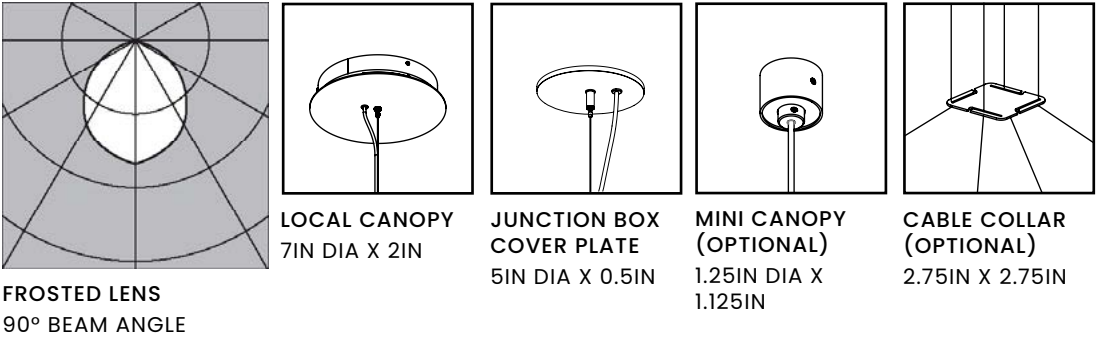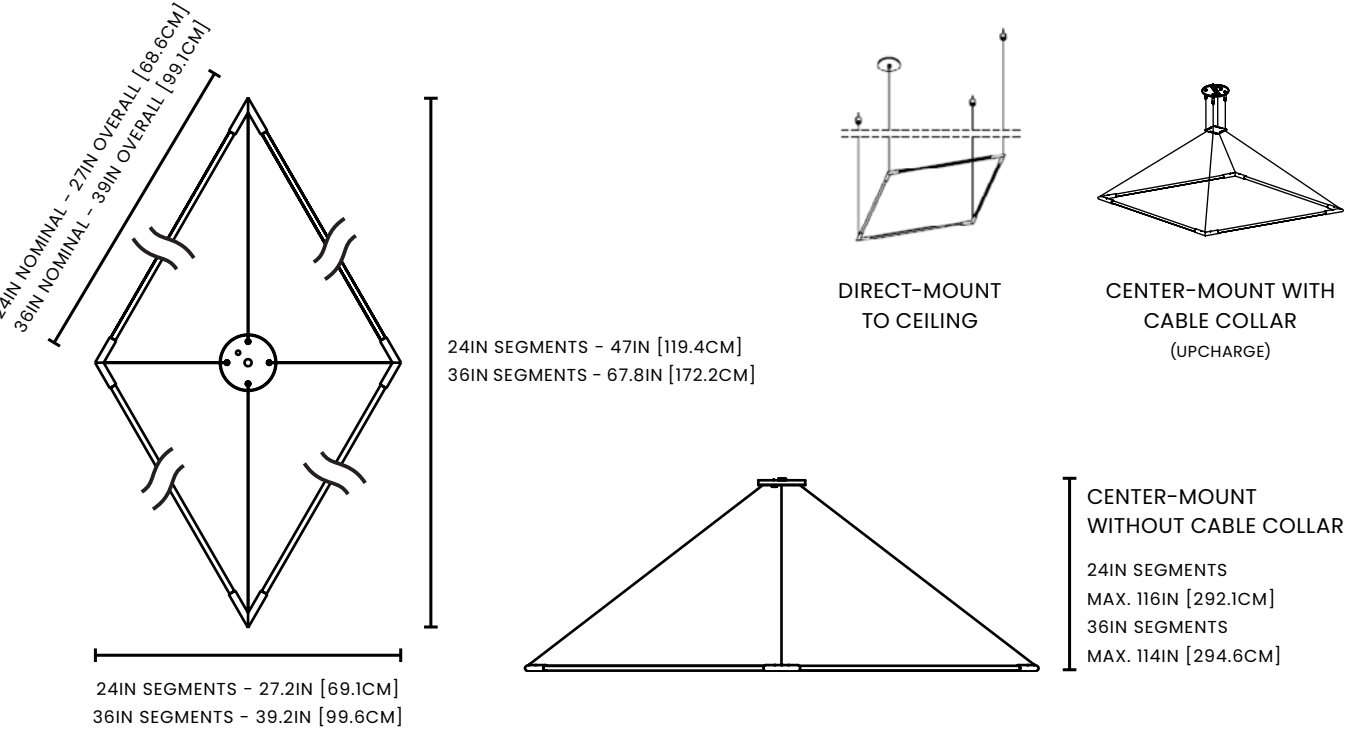

<b>ILLUMINATION</b> CRI 95+, R9 90+ standard 2700K, 3000K, 3500K, 4000K options  24" segment 2400LM delivered/27.2W 36" segment 3680LM delivered/38.4W 90LM/W 50,000 hrs LED life L80	<b>FINISHES</b> Satin Brass, Black Oxide, Satin Nickel  <b>MATERIALS</b> Solid brass, PMMA  <b>DIMMING</b> 2-Wire/TRIAC/Forward Phase 0-10V 3-Wire See Power Supply section for details Contact Juniper for alternate requirements	<b>MOUNTING</b> (x4) 1/16" aircraft cables, field adjustable 16ft Clear-jacketed 22AWG co-axial silver cord, field adjustable Direct-mounting and center-mounting options available Cable Collar in matching finish optional for center mounting  <b>SYSTEM RUN</b> Limited by power supply wattage only
--	--	---

BUILD A SPECIFICATION | THIN Primaries Rhombus Suspension

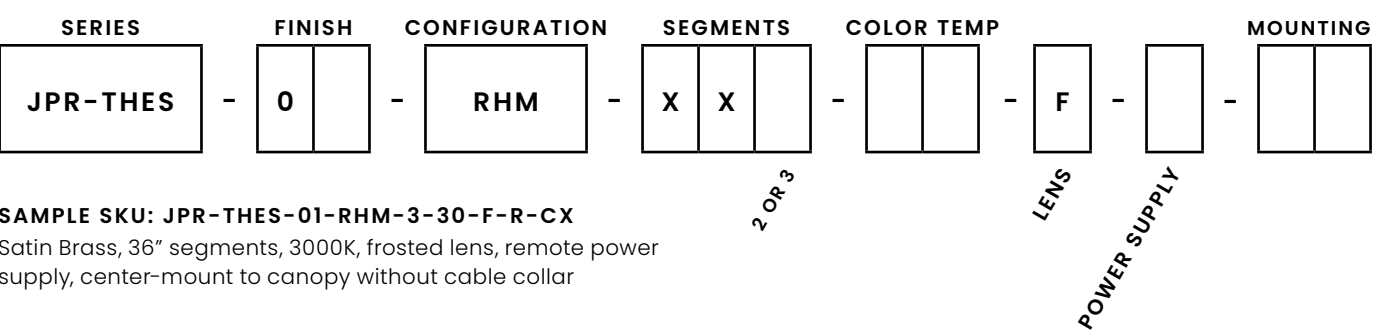

SAMPLE SKU: JPR-THES-01-RHM-3-30-F-R-CX  
Satin Brass, 36" segments, 3000K, frosted lens, remote power supply, center-mount to canopy without cable collar

CODE DEFINITIONS

FINISHES



SEGMENTS

2 24 inch - 2400LM delivered / 27.2W  
3 36 inch - 3680LM delivered / 38.4W  
Contact Juniper for custom segment lengths

COLOR TEMPERATURE

27 2700K  
30 3000K  
35 3500K  
40 4000K

LENS

F Frosted - 90° beam angle

MOUNTING

CX Center-Mount to Canopy without Cable Collar  
Includes corresponding canopy  
CC Center-Mount to Canopy with Cable Collar (upcharge)  
Includes corresponding canopy  
DM Direct-Mount to Ceiling  
Includes corresponding canopy for a single power cord with ceiling grippers for other mounting points

POWER SUPPLY OPTIONS

R. REMOTE

STANDARD 120-277V INPUT - 2-WIRE/TRIAC/FORWARD PHASE/ELV  
  
STANDARD 120-277V INPUT - 0-10V  
  
LUTRON 120V INPUT - TRIAC DIMMING (40W ) (UPCHARGE)  
  
LUTRON 120-277V INPUT - 3-WIRE (UPCHARGE)

L. LOCAL



STANDARD 120-277V INPUT - TRIAC/0-10V/ELV DIMMING

Our team will determine correct wattages for power supplies based on chosen configuration. Contact Juniper for custom requirements or further power supply specifications.

Project	Type
Notes	




TECHNICAL | THIN Primaries Hexagon Suspension

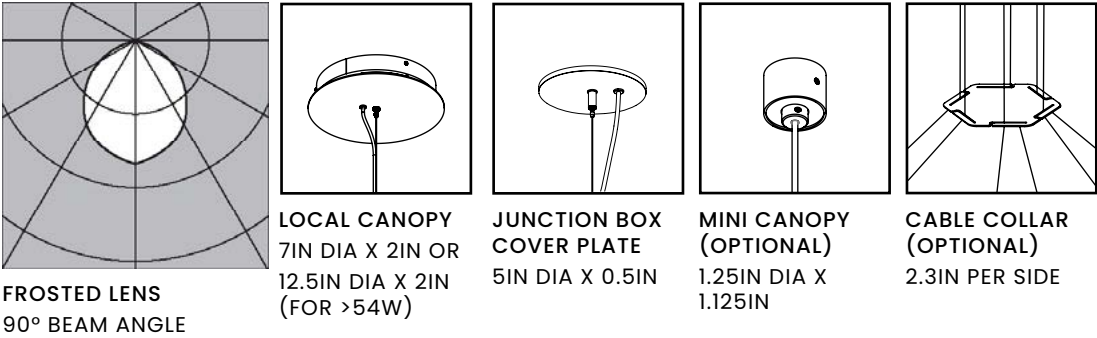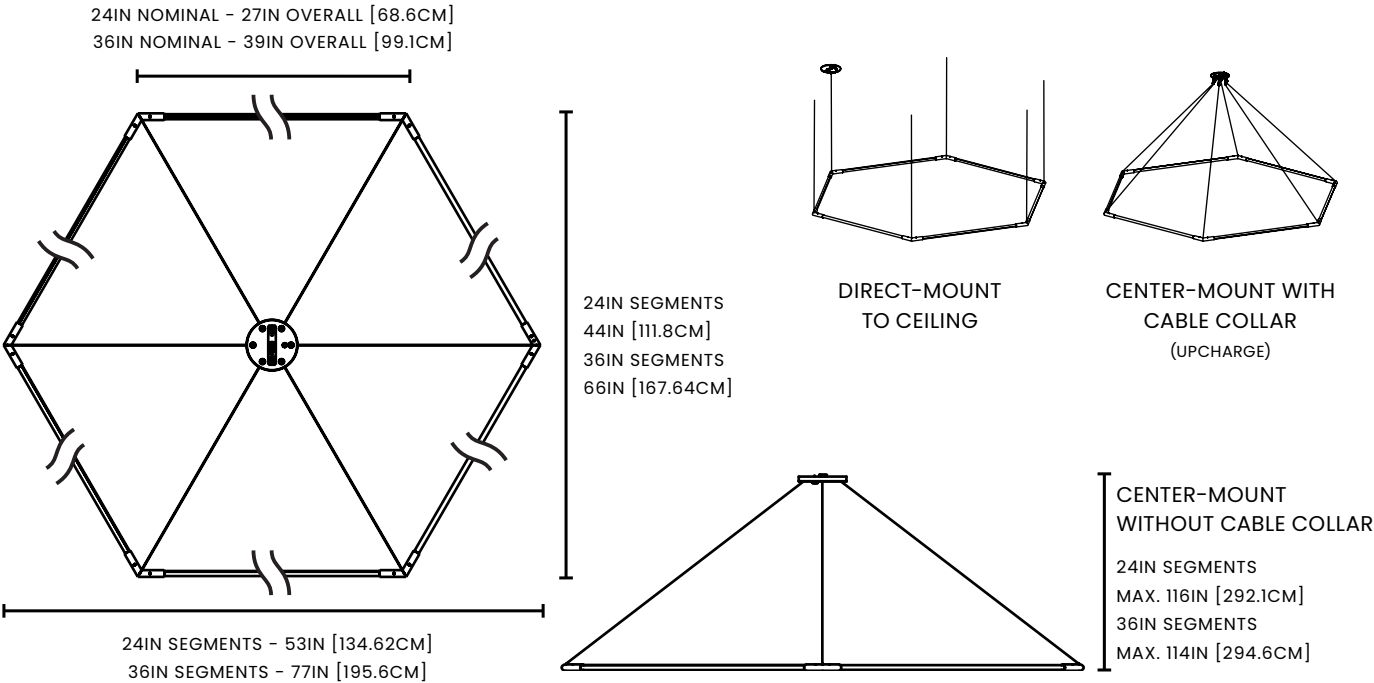

<b>ILLUMINATION</b> CRI 95+, R9 90+ standard 2700K, 3000K, 3500K, 4000K options  <b>24" segment</b> 3600LM delivered/40.8W <b>36" segment</b> 5500LM delivered/57.6W 90LM/W 50,000 hrs LED life L80	<b>FINISHES</b> Satin Brass, Black Oxide, Satin Nickel  <b>MATERIALS</b> Solid brass, PMMA  <b>DIMMING</b> 2-Wire/TRIAC/Forward Phase 0-10V 3-Wire See Power Supply section for details Contact Juniper for alternate requirements	<b>MOUNTING</b> (x6) 1/16" aircraft cables, field adjustable 16ft Clear-jacketed 22AWG co-axial silver cord, field adjustable Direct-mounting and center-mounting options available Cable Collar in matching finish optional for center mounting  <b>SYSTEM RUN</b> Limited by power supply wattage only
--	---	---

BUILD A SPECIFICATION | THIN Primaries Hexagon Suspension


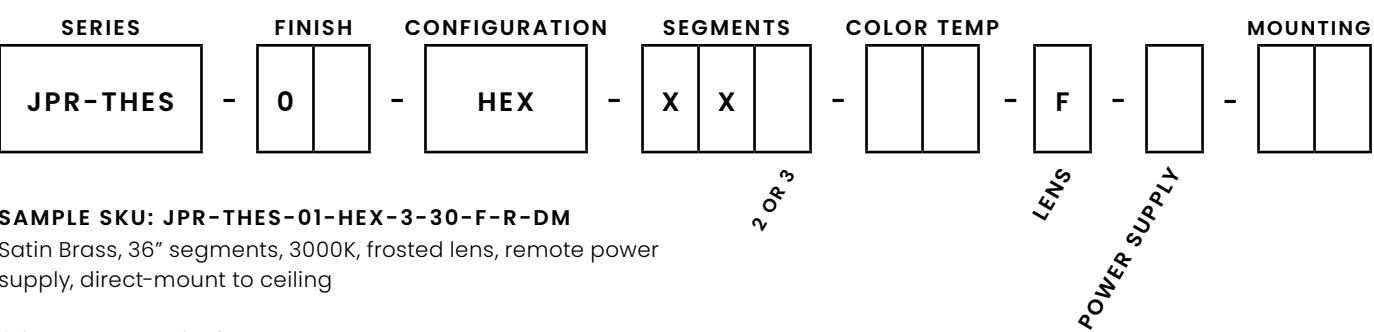


<b>CODE DEFINITIONS</b>	<b>POWER SUPPLY OPTIONS</b>
<b>FINISHES</b>  <b>01</b> Satin Brass <b>02</b> Black Oxide <b>03</b> Satin Nickel	<b>R. REMOTE</b>  STANDARD 120-277V INPUT - 2-WIRE/TRIAC/FORWARD PHASE/ELV  STANDARD 120-277V INPUT - 0-10V  LUTRON 120-277V INPUT - 3-WIRE (UPCHARGE)
<b>SEGMENTS</b> <b>2</b> 24 inch - 3600LM delivered / 40.8W <b>3</b> 36 inch - 5500LM delivered / 57.6W  Contact Juniper for custom segment lengths	<b>L. LOCAL</b>  STANDARD 120-277V INPUT - TRIAC/0-10V/ELV DIMMING
<b>COLOR TEMPERATURE</b> <b>27</b> 2700K <b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K	
<b>LENS</b> <b>F</b> Frosted - 90° beam angle	
<b>MOUNTING</b> <b>CX</b> Center-Mount to Canopy without Cable Collar Includes corresponding canopy <b>CC</b> Center-Mount to Canopy with Cable Collar (upcharge) Includes corresponding canopy <b>DM</b> Direct-Mount to Ceiling Includes corresponding canopy for a single power cord with ceiling grippers for other mounting points	

Our team will determine correct wattages for power supplies based on chosen configuration. Contact Juniper for custom requirements or further power supply specifications.


Project	Type
Notes	

TECHNICAL | THIN Primaries Octagon Suspension

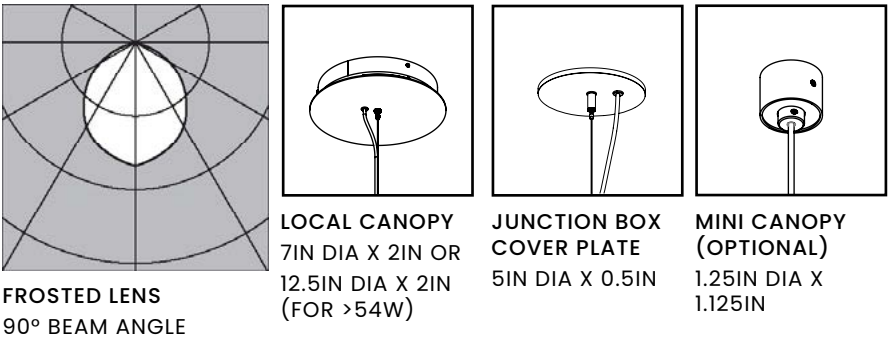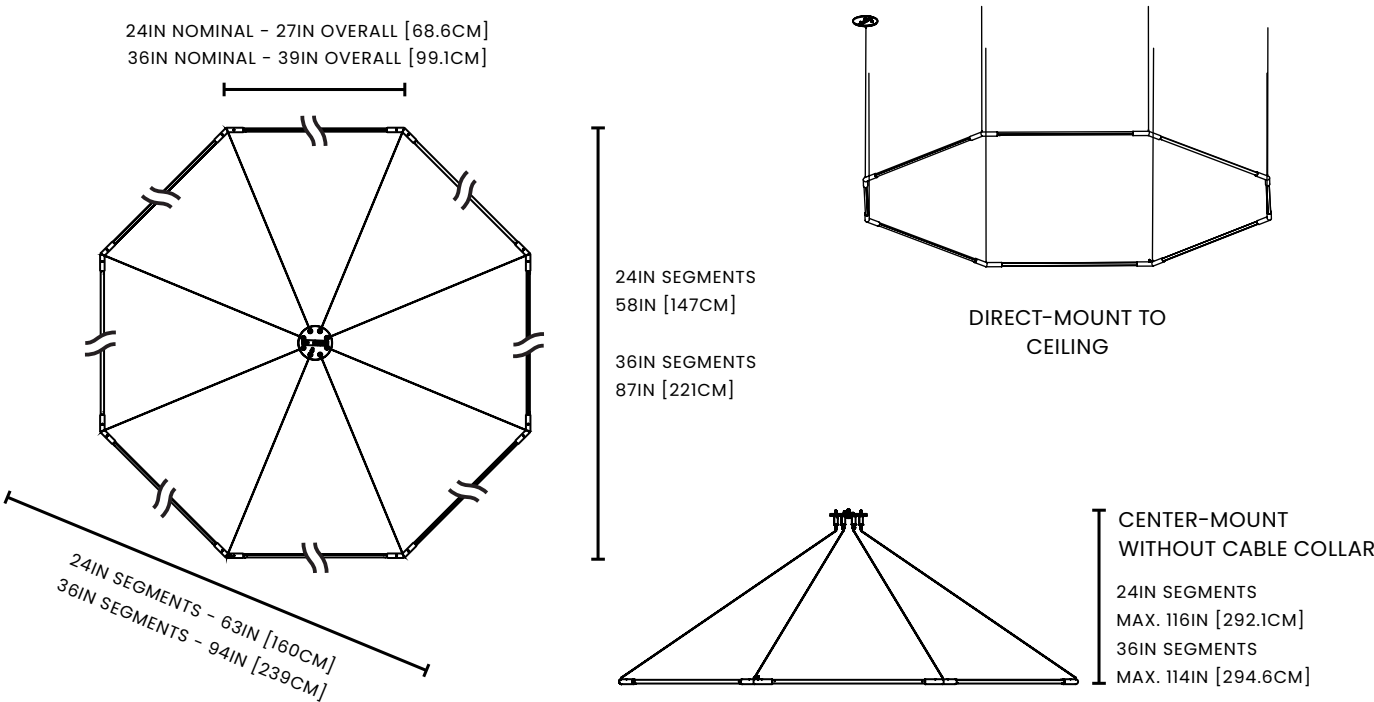

<b>ILLUMINATION</b> CRI 95+, R9 90+ standard 2700K, 3000K, 3500K, 4000K options  24" segment 4800LM delivered/54.4W 36" segment 7400LM delivered/76.8W 90LM/W 50,000 hrs LED life L80	<b>FINISHES</b> Satin Brass, Black Oxide, Satin Nickel  <b>MATERIALS</b> Solid brass, PMMA  <b>DIMMING</b> 2-Wire/TRIAC/Forward Phase 0-10V 3-Wire See Power Supply section for details Contact Juniper for alternate requirements	<b>MOUNTING</b> (x8) 1/16" aircraft cables, field adjustable 16ft Clear-jacketed 22AWG co-axial silver cord, field adjustable Direct-mounting and center-mounting options available  <b>SYSTEM RUN</b> Limited by power supply wattage only
--	---	---

BUILD A SPECIFICATION | THIN Primaries Octagon Suspension

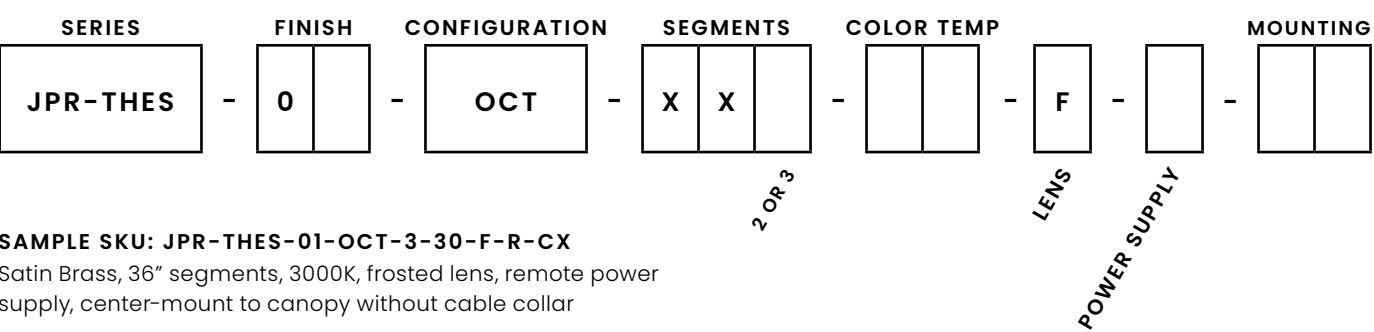

**SAMPLE SKU: JPR-THES-01-OCT-3-30-F-R-CX**  
Satin Brass, 36" segments, 3000K, frosted lens, remote power supply, center-mount to canopy without cable collar

CODE DEFINITIONS

FINISHES



SEGMENTS

2 24 inch - 4800LM delivered / 54.4W  
3 36 inch - 7400LM delivered / 76.8W  
Contact Juniper for custom segment lengths

COLOR TEMPERATURE

27 2700K  
30 3000K  
35 3500K  
40 4000K

LENS

F Frosted - 90° beam angle

MOUNTING

**CX** Center-Mount to Canopy without Cable Collar  
Includes corresponding canopy  
**DM** Direct-Mount to Ceiling  
Includes corresponding canopy for a single power cord with ceiling grippers for other mounting points

POWER SUPPLY OPTIONS

R. REMOTE

STANDARD 120-277V INPUT - 2-WIRE/TRIAC/FORWARD PHASE/ELV  
  
STANDARD 120-277V INPUT - 0-10V  
  
LUTRON 120-277V INPUT - 3-WIRE (UPCHARGE)



L. LOCAL

STANDARD 120-277V INPUT - TRIAC/0-10V/ELV DIMMING


Our team will determine correct wattages for power supplies based on chosen configuration. Contact Juniper for custom requirements or further power supply specifications.

Project	Type
Notes	


TECHNICAL | THIN Primaries Triangle Surface Mount

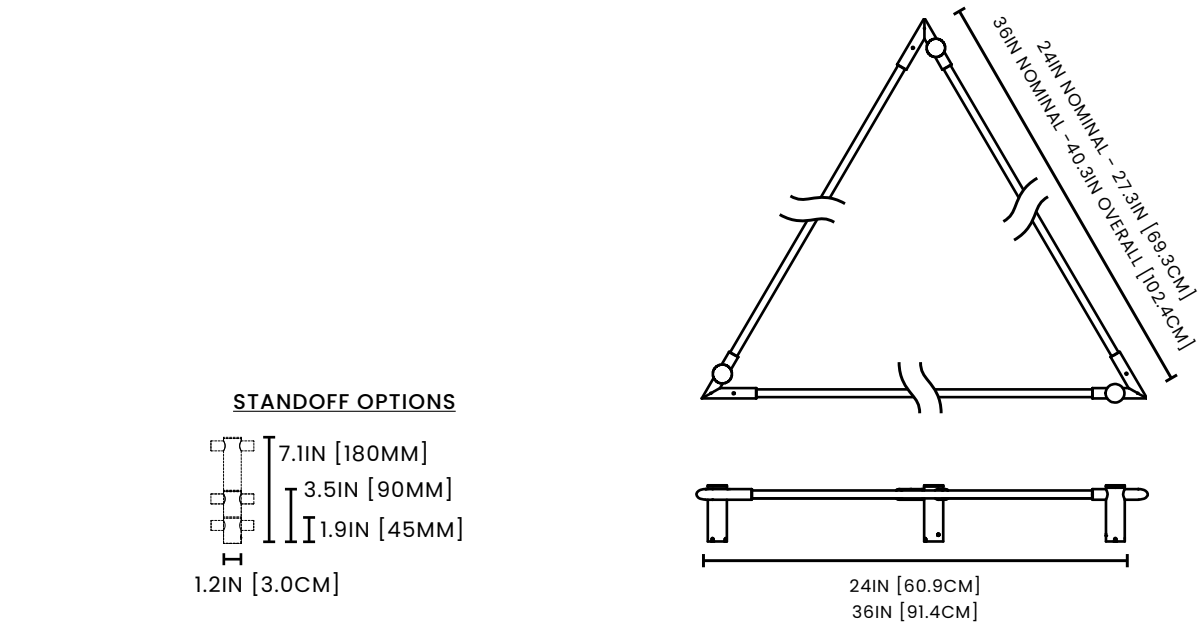

FROSTED LENS  
90° BEAM ANGLE

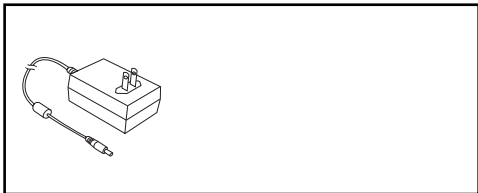

OPTIONAL PLUG-IN POWER SUPPLY WITH  
IN-LINE TOUCH DIMMER & 3-METER CORD



ILLUMINATION
CRI 95+, R9 90+ standard 2700K, 3000K, 3500K, 4000K options
<b>24" segment</b> 1800LM delivered / 20.4W
<b>36" segment</b> 2760LM delivered / 28.8W
90LM/W
50,000 hrs LED life L80
POWER

FINISHES
Satin Brass, Black Oxide, Satin Nickel
MATERIALS
Solid brass, PMMA
DIMMING
2-Wire/TRIAC/Forward Phase 0-10V 3-Wire See Power Supply section for details Contact Juniper for alternate requirements

MOUNTING
Wall brackets mount directly to surface 2 X 18AWG in-wall rated cable recommended for remote installation (provided by electrician)

BUILD A SPECIFICATION | THIN Primaries Triangle Surface Mount

SERIES

JPR-THEW

-

FINISH

0

-

CONFIGURATION

TRI

-

SEGMENT

X

X

-

STANDOFF

-

COLOR TEMP

-

LENS

F

-

POWER SUPPLY

2 OR 3

**SAMPLE SKU: JPR-THEW-01-TRI-003-090-30-C-R**  
Satin Brass, (3) 36" segments, 3000K, 90 mm standoffs, clear lens, remote power supply

CODE DEFINITIONS

FINISHES



**01** Satin Brass   **02** Black Oxide   **03** Satin Nickel

SEGMENTS

- 2** 24 inch - 1800LM delivered / 20.4W
  - 3** 36 inch - 2760LM delivered / 28.8W
- Contact Juniper for custom segment lengths

STANDOFF LENGTH

- 045** 45mm Standoffs
- 090** 90mm Standoffs
- 180** 180mm Standoffs

COLOR TEMPERATURE

- 27** 2700K
- 30** 3000K
- 35** 3500K
- 40** 4000K

LENS

- F** Frosted - 90° beam angle

POWER SUPPLY OPTIONS

R. REMOTE

- STANDARD 120-277V INPUT - 2-WIRE/TRIAC/FORWARD PHASE/ELV
- STANDARD 120-277V INPUT - 0-10V
- LUTRON 120V INPUT - TRIAC DIMMING (40W ) (UPCHARGE)
- LUTRON 120-277V INPUT - 3-WIRE (UPCHARGE)



P. PLUG-IN

- 24VDC, 1.67A POWER SUPPLY


Our team will determine correct wattages for power supplies based on chosen configuration. Contact Juniper for custom requirements or further power supply specifications.

Project	Type
Notes	

TECHNICAL | THIN Primaries Square Surface Mount

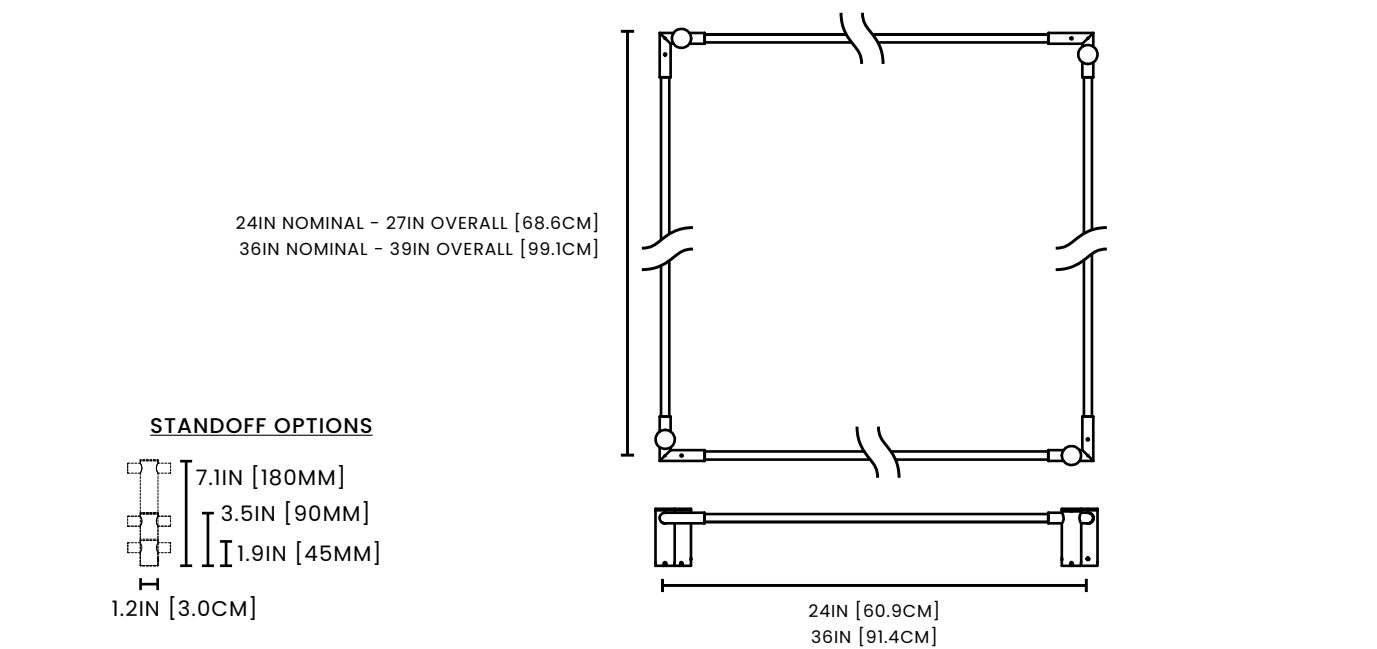

FROSTED LENS  
90° BEAM ANGLE

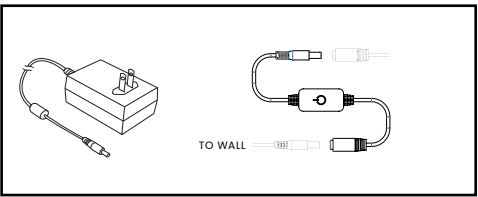

OPTIONAL PLUG-IN POWER SUPPLY WITH  
IN-LINE TOUCH DIMMER & 3-METER CORD


TO FIXTURE

<b>ILLUMINATION</b>  CRI 95+, R9 90+ standard 2700K, 3000K, 3500K, 4000K options  <b>24" segment</b> 2400LM delivered/27.2W <b>36" segment</b> 3680LM delivered/38.4W 90LM/W 50,000 hrs LED life L80	<b>FINISHES</b>  Satin Brass, Black Oxide, Satin Nickel  <b>MATERIALS</b>  Solid brass, PMMA  <b>DIMMING</b>  2-Wire/TRIAC/Forward Phase 0-10V 3-Wire See Power Supply section for details Contact Juniper for alternate requirements	<b>MOUNTING</b>  Wall brackets mount directly to surface 2 X 18AWG in-wall rated cable recommended for remote installation (provided by electrician)
<b>POWER</b>  24VDC output Class 2 constant voltage power supply 120VAC input voltage Remote power supply required Contact Juniper for alternate inputs		

Designed by Peter Bristol & Juniper



BUILD A SPECIFICATION | THIN Primaries Square Surface Mount

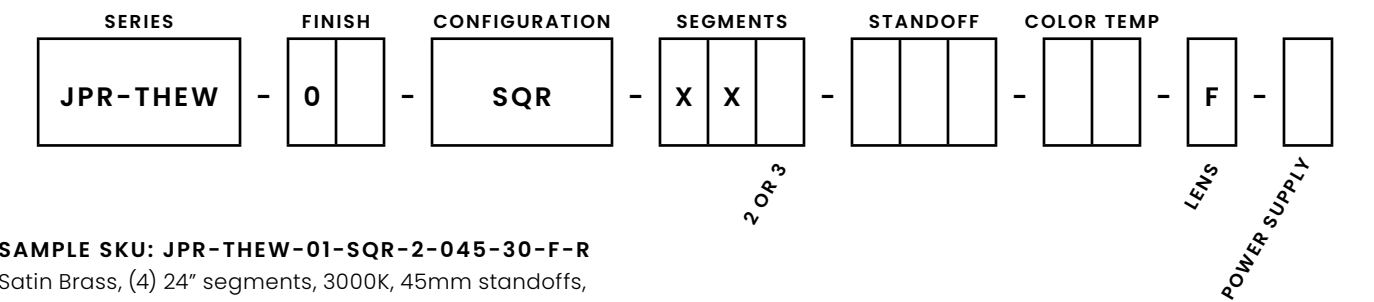

**SAMPLE SKU: JPR-THEW-01-SQR-2-045-30-F-R**  
Satin Brass, (4) 24" segments, 3000K, 45mm standoffs, frosted lens, remote power supply

CODE DEFINITIONS

FINISHES



**01** Satin Brass    **02** Black Oxide    **03** Satin Nickel

SEGMENTS

**2** 24 inch - 2400LM delivered / 27.2W  
**3** 36 inch - 3680LM delivered / 38.4W  
Contact Juniper for custom segment lengths

STANDOFF LENGTH

**045** 45mm Standoffs  
**090** 90mm Standoffs  
**180** 180mm Standoffs

COLOR TEMPERATURE

**27** 2700K  
**30** 3000K  
**35** 3500K  
**40** 4000K

LENS

**F** Frosted - 90° beam angle

POWER SUPPLY OPTIONS

R. REMOTE

STANDARD 120-277V INPUT - 2-WIRE/TRIAC/FORWARD PHASE/ELV

STANDARD 120-277V INPUT - 0-10V

LUTRON 120V INPUT - TRIAC DIMMING (40W ) (UPCHARGE)

LUTRON 120-277V INPUT - 3-WIRE (UPCHARGE)

P. PLUG-IN



24VDC, 1.67A POWER SUPPLY

Our team will determine correct wattages for power supplies based on chosen configuration. Contact Juniper for custom requirements or further power supply specifications.


Project	Type
Notes	



TECHNICAL | THIN Primaries Rectangle Surface Mount

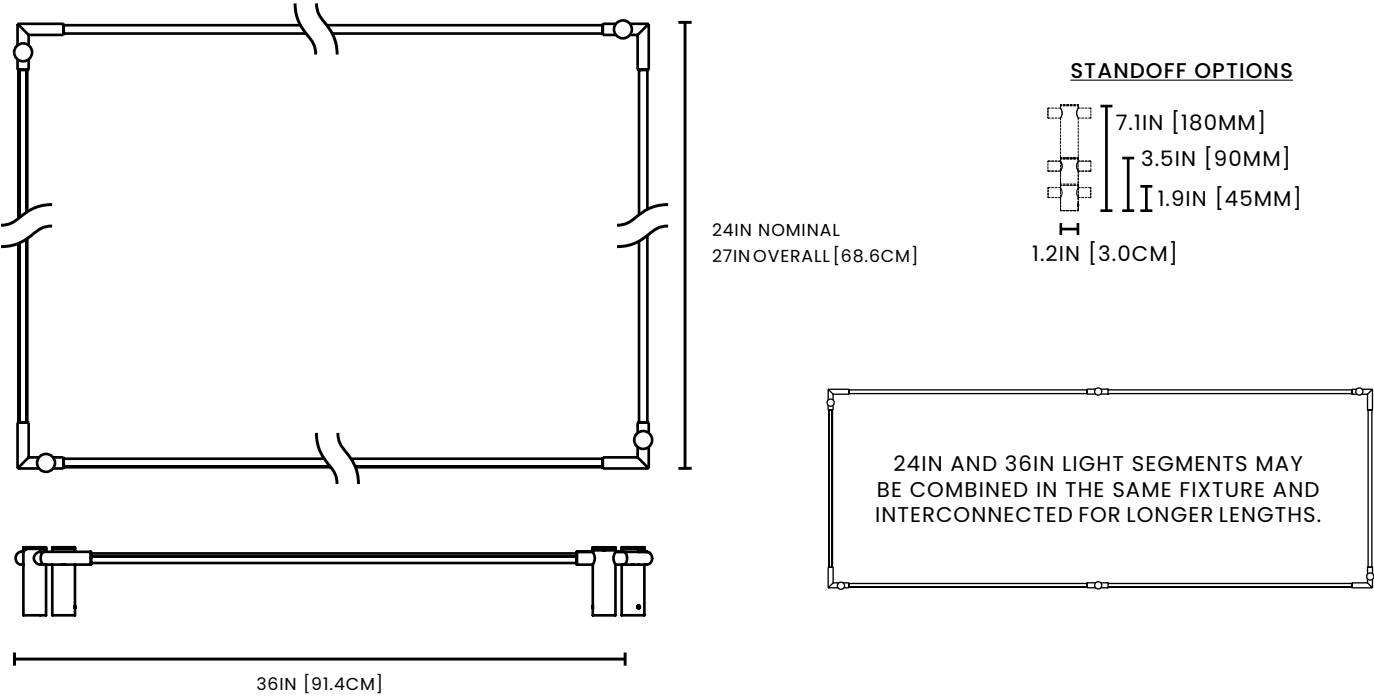

FROSTED LENS  
90° BEAM ANGLE

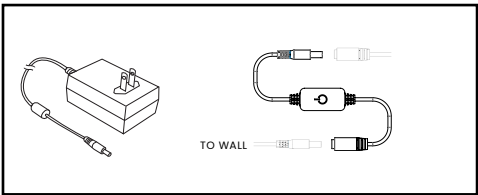

OPTIONAL PLUG-IN POWER SUPPLY WITH  
IN-LINE TOUCH DIMMER & 3-METER CORD

TO FIXTURE

**ILLUMINATION**  
CRI 95+, R9 90+ standard  
2700K, 3000K, 3500K, 4000K options

**24" segment** 600LM delivered  
6.8W/segment  
**36" segment** 920LM delivered  
9.6W/segment  
90LM/W  
50,000 hrs LED life L80

**POWER**  
24VDC output Class 2 constant  
voltage power supply  
120VAC input voltage  
Remote power supply required  
Contact Juniper for alternate inputs

**FINISHES**  
Satin Brass, Black Oxide, Satin Nickel

**MATERIALS**  
Solid brass, PMMA

**DIMMING**  
2-Wire/TRIAC/Forward Phase  
0-10V  
3-Wire  
See Power Supply section for details  
Contact Juniper for alternate  
requirements

**MOUNTING**  
Wall brackets mount directly to  
surface  
2 X 18AWG in-wall rated cable  
recommended for remote installation  
(provided by electrician)

Designed by Peter Bristol & Juniper

UL ETL CE FCC DAMP RATED ADA COMPLIANT

BUILD A SPECIFICATION | THIN Primaries Rectangle Surface

CONTACT US TO SKU THIS CUSTOM FIXTURE

CALL: +1-347-799-2915 | EMAIL: SALES@JUNIPER-DESIGN.COM

CODE DEFINITIONS

FINISHES



01 Satin Brass 02 Black Oxide 03 Satin Nickel

SEGMENTS

2 24 inch - 2400LM delivered - 6.8W/segment  
3 36 inch - 3680LM delivered - 9.6W/segment  
Contact Juniper for custom segment lengths

STANDOFF LENGTH

045 45mm Standoffs  
090 90mm Standoffs  
180 180mm Standoffs

COLOR TEMPERATURE

27 2700K  
30 3000K  
35 3500K  
40 4000K

LENS

F Frosted - 90° beam angle

POWER SUPPLY OPTIONS

R. REMOTE

STANDARD 120-277V INPUT - 2-WIRE/TRIAC/FORWARD  
PHASE/ELV

STANDARD 120-277V INPUT - 0-10V

LUTRON 120V INPUT - TRIAC DIMMING (40W ) (UPCHARGE)

LUTRON 120-277V INPUT - 3-WIRE (UPCHARGE)

P. PLUG-IN

24VDC, 1.67A POWER SUPPLY

Our team will determine correct wattages for power supplies  
based on chosen configuration. Contact Juniper for custom  
requirements or further power supply specifications.

Project	Type
Notes	

TECHNICAL | THIN Primaries Rhombus Surface Mount

STANDOFF OPTIONS

TO WALL

TO FIXTURE

**FROSTED LENS**  
90° BEAM ANGLE

**ILLUMINATION**

CRI 95+, R9 90+ standard  
2700K, 3000K, 3500K, 4000K options

**24" segment** 2400LM delivered/27.2W  
**36" segment** 3680LM delivered/38.4W  
90LM/W  
50,000 hrs LED life L80

**POWER**

24VDC output Class 2 constant voltage power supply  
120VAC input voltage  
Remote power supply required  
Contact Juniper for alternate inputs

**FINISHES**

Satin Brass, Black Oxide, Satin Nickel

**MATERIALS**

Solid brass, PMMA

**DIMMING**

2-Wire/TRIAC/Forward Phase  
0-10V  
3-Wire  
See Power Supply section for details  
Contact Juniper for alternate requirements

**MOUNTING**

Wall brackets mount directly to surface  
2 X 18AWG in-wall rated cable recommended for remote installation (provided by electrician)

BUILD A SPECIFICATION | THIN Primaries Rhombus Surface Mount

SERIES

JPR-THEW

FINISH

0

CONFIGURATION

RHM

SEGMENTS

X X

2 OR 3

STANDOFF

COLOR TEMP

F

LENS

POWER SUPPLY

**SAMPLE SKU: JPR-THEW-01-RHM-2-045-30-F-R**  
Satin Brass, (4) 24" segments, 3000K, 45mm standoffs, frosted lens, remote power supply

CODE DEFINITIONS

FINISHES

**01** Satin Brass

**02** Black Oxide

**03** Satin Nickel

SEGMENTS

**2** 24 inch - 2400LM delivered / 27.2W  
**3** 36 inch - 3680LM delivered / 38.4W  
Contact Juniper for custom segment lengths

STANDOFF LENGTH

**045** 45mm Standoffs  
**090** 90mm Standoffs  
**180** 180mm Standoffs

COLOR TEMPERATURE

**27** 2700K  
**30** 3000K  
**35** 3500K  
**40** 4000K

LENS

**F** Frosted - 90° beam angle

POWER SUPPLY OPTIONS

R. REMOTE

STANDARD 120-277V INPUT - 2-WIRE/TRIAC/FORWARD PHASE/ELV

STANDARD 120-277V INPUT - 0-10V

LUTRON 120V INPUT - TRIAC DIMMING (40W ) (UPCHARGE)

LUTRON 120-277V INPUT - 3-WIRE (UPCHARGE)

P. PLUG-IN

24VDC, 1.67A POWER SUPPLY

Our team will determine correct wattages for power supplies based on chosen configuration. Contact Juniper for custom requirements or further power supply specifications.

Project	Type
Notes	

TECHNICAL | THIN Primaries Hexagon Surface Mount

**STANDOFF OPTIONS**

7.1IN [180MM]  
3.5IN [90MM]  
1.9IN [45MM]  
1.2IN [3.0CM]

24IN SEGMENTS  
44IN [111.8CM]  
36IN SEGMENTS  
66IN [167.64CM]

24IN NOMINAL - 27IN OVERALL [68.6CM]  
36IN NOMINAL - 39IN OVERALL [99.1CM]

24IN SEGMENTS - 53IN [134.62CM]  
36IN SEGMENTS - 77IN [195.6CM]

**FROSTED LENS**  
90° BEAM ANGLE

**OPTIONAL PLUG-IN POWER SUPPLY WITH IN-LINE TOUCH DIMMER & 3-METER CORD**

<b>ILLUMINATION</b> CRI 95+, R9 90+ standard 2700K, 3000K, 3500K, 4000K options  <b>24" segment</b> 3600LM delivered/40.8W <b>36" segment</b> 5500LM delivered/57.6W 90LM/W 50,000 hrs LED life L80	<b>FINISHES</b> Satin Brass, Black Oxide, Satin Nickel  <b>MATERIALS</b> Solid brass, PMMA  <b>DIMMING</b> 2-Wire/TRIAC/Forward Phase 0-10V 3-Wire See Power Supply section for details Contact Juniper for alternate requirements	<b>MOUNTING</b> Wall brackets mount directly to surface 2 X 18AWG in-wall rated cable recommended for remote installation (provided by electrician)
<b>POWER</b> 24VDC output Class 2 constant voltage power supply 120VAC input voltage Contact Juniper for alternate inputs		

BUILD A SPECIFICATION | THIN Primaries Hexagon Surface Mount

**SERIES**  
JPR-THEW

**FINISH**  
0

**CONFIGURATION**  
HEX

**SEGMENTS**  
X X  
2 OR 3

**STANDOFF**  
- - -

**COLOR TEMP**  
- - -

**LENS**  
F

**POWER SUPPLY**  
-

**SAMPLE SKU: JPR-THEW-01-HEX-2-045-30-F-R**  
Satin Brass, (4) 24" segments, 3000K, 45mm standoffs, frosted lens, remote power supply

CODE DEFINITIONS

FINISHES

**01** Satin Brass

**02** Black Oxide

**03** Satin Nickel

SEGMENTS

**2** 24 inch - 3600LM delivered / 40.8W  
**3** 36 inch - 5500LM delivered / 57.6W  
Contact Juniper for custom segment lengths

STANDOFF LENGTH

**045** 45mm Standoffs  
**090** 90mm Standoffs  
**180** 180mm Standoffs

COLOR TEMPERATURE

**27** 2700K  
**30** 3000K  
**35** 3500K  
**40** 4000K

LENS

**F** Frosted - 90° beam angle

POWER SUPPLY OPTIONS

R. REMOTE

STANDARD 120-277V INPUT - 2-WIRE/TRIAC/FORWARD PHASE/ELV

STANDARD 120-277V INPUT - 0-10V

LUTRON 120-277V INPUT - 3-WIRE (UPCHARGE)

P. PLUG-IN

24VDC, 1.67A POWER SUPPLY

Our team will determine correct wattages for power supplies based on chosen configuration. Contact Juniper for custom requirements or further power supply specifications.

Project	Type
Notes	

TECHNICAL | THIN Primaries Octagon Surface Mount

**STANDOFF OPTIONS**

**FROSTED LENS**  
90° BEAM ANGLE

**OPTIONAL PLUG-IN POWER SUPPLY WITH IN-LINE TOUCH DIMMER & 3-METER CORD**

<b>ILLUMINATION</b>  CRI 95+, R9 90+ standard 2700K, 3000K, 3500K, 4000K options  <b>24" segment</b> 4800LM delivered/54.4W <b>36" segment</b> 7400LM delivered/76.8W 90LM/W 50,000 hrs LED life L80	<b>FINISHES</b>  Satin Brass, Black Oxide, Satin Nickel  <b>MATERIALS</b>  Solid brass, PMMA  <b>DIMMING</b>  2-Wire/TRIAC/Forward Phase 0-10V 3-Wire See Power Supply section for details Contact Juniper for alternate requirements	<b>MOUNTING</b>  Wall brackets mount directly to surface 2 X 18AWG in-wall rated cable recommended for remote installation (provided by electrician)
<b>POWER</b>  24VDC output Class 2 constant voltage power supply 120VAC input voltage Contact Juniper for alternate inputs		

BUILD A SPECIFICATION | THIN Primaries Octagon Surface Mount

**SERIES**  
JPR-THEW

**FINISH**  
0

**CONFIGURATION**  
OCT

**SEGMENTS**  
X X  
2 OR 3

**STANDOFF**

**COLOR TEMP**

**LENS**  
F

**POWER SUPPLY**

**SAMPLE SKU: JPR-THEW-01-OCT-2-045-30-F-R**  
Satin Brass, (4) 24" segments, 3000K, 45mm standoffs, frosted lens, remote power supply

CODE DEFINITIONS

FINISHES

**01** Satin Brass

**02** Black Oxide

**03** Satin Nickel

SEGMENTS

**2** 24 inch - 4800LM delivered / 54.4W  
**3** 36 inch - 7400LM delivered / 76.8W  
Contact Juniper for custom segment lengths

STANDOFF LENGTH

**045** 45mm Standoffs  
**090** 90mm Standoffs  
**180** 180mm Standoffs

COLOR TEMPERATURE

**27** 2700K  
**30** 3000K  
**35** 3500K  
**40** 4000K

LENS

**F** Frosted - 90° beam angle

POWER SUPPLY OPTIONS

R. REMOTE

STANDARD 120-277V INPUT - 2-WIRE/TRIAC/FORWARD PHASE/ELV

STANDARD 120-277V INPUT - 0-10V

LUTRON 120-277V INPUT - 3-WIRE (UPCHARGE)

P. PLUG-IN



24VDC, 1.67A POWER SUPPLY

Our team will determine correct wattages for power supplies based on chosen configuration. Contact Juniper for custom requirements or further power supply specifications.

Project	Type
Notes	



TECHNICAL | THIN Solids Tetrahedron

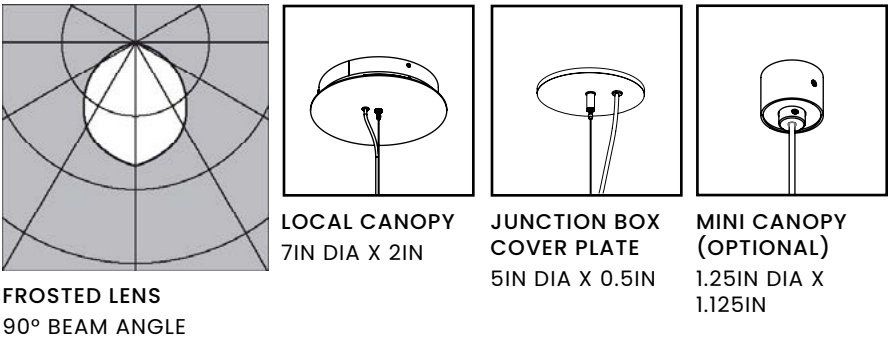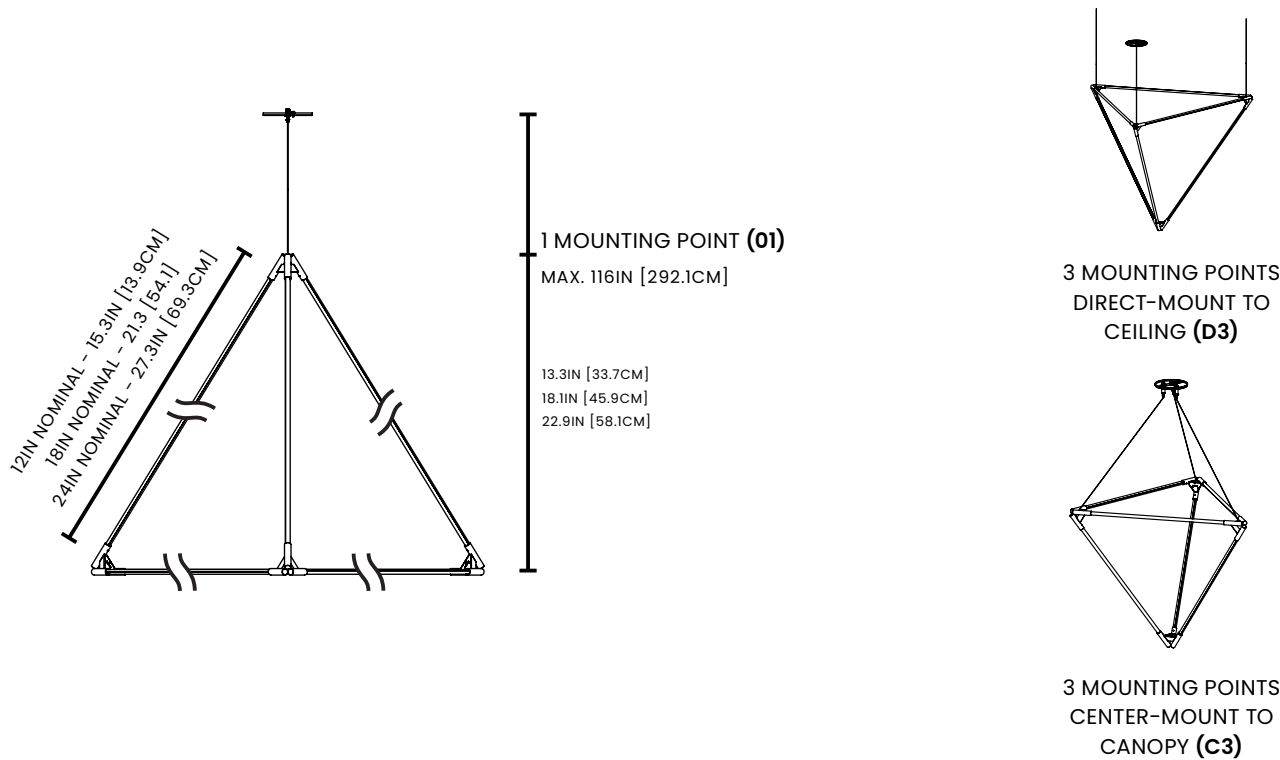

<b>ILLUMINATION</b> CRI 95+, R9 90+ standard 2700K, 3000K, 3500K, 4000K options  <b>12" segment</b> 1800LM delivered/20.4W <b>18" segment</b> 2700LM delivered/30.6W <b>24" segment</b> 3600LM delivered/40.8W 90LM/W 50,000 hrs LED life L80	<b>FINISHES</b> Satin Brass, Black Oxide, Satin Nickel  <b>MATERIALS</b> Solid brass, PMMA  <b>DIMMING</b> 2-Wire/TRIAC/Forward Phase 0-10V 3-Wire See Power Supply section for details Contact Juniper for alternate requirements	<b>MOUNTING</b> (x1 or x3) 1/16" aircraft cables, field adjustable 16ft Clear-jacketed 22AWG co-axial silver cord, field adjustable 1 or 3 mounting point options  <b>SYSTEM RUN</b> Limited by power supply wattage
<b>POWER</b> 24VDC output Class 2 constant voltage power supply 120VAC input voltage Contact Juniper for alternate inputs		

BUILD A SPECIFICATION | THIN Solids Tetrahedron

SERIES	FINISH	CONFIGURATION	SEGMENTS	COLOR TEMP	LENS	POWER SUPPLY	MOUNTING POINTS
JPR-THES	- 0	- TET	-	-	- F	-	-

**SAMPLE SKU: JPR-THES-02-TET-12-27-C-R-01**  
Black Oxide, 12" segments, 2700K, clear lens, remote power supply, suspended from one corner



**CODE DEFINITIONS**

<b>FINISHES</b>  <b>01</b> Satin Brass  <b>02</b> Black Oxide  <b>03</b> Satin Nickel	<b>POWER SUPPLY OPTIONS</b>  <b>R. REMOTE</b>  STANDARD 120-277V INPUT - 2-WIRE/TRIAC/FORWARD PHASE/ELV  STANDARD 120-277V INPUT - 0-10V  LUTRON 120V INPUT - TRIAC DIMMING (40W ) (UPCHARGE)  LUTRON 120-277V INPUT - 3-WIRE (UPCHARGE)  <b>L. LOCAL</b>  STANDARD 120-277V INPUT - TRIAC/0-10V/ELV DIMMING
<b>SEGMENTS</b> <b>12</b> 12 inch - 1800LM delivered / 20.4W <b>18</b> 18 inch - 2700LM delivered / 30.6W <b>24</b> 24 inch - 3600LM delivered / 40.8W Contact Juniper for custom segment lengths	
<b>COLOR TEMPERATURE</b> <b>27</b> 2700K <b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K	
<b>LENS</b> <b>F</b> Frosted - 90° beam angle	
<b>MOUNTING POINTS</b> <b>01</b> 1 Mounting Point Suspended from 1 corner <b>D3</b> 3 Mounting Points, Direct-Mount to Ceiling Suspended from 3 corners <b>C3</b> 3 Mounting Points, Center-Mount to Canopy Suspended from 3 corners	

Our team will determine correct wattages for power supplies based on chosen configuration. Contact Juniper for custom requirements or further power supply specifications.

Project	Type
Notes	

TECHNICAL | THIN Solids Cube

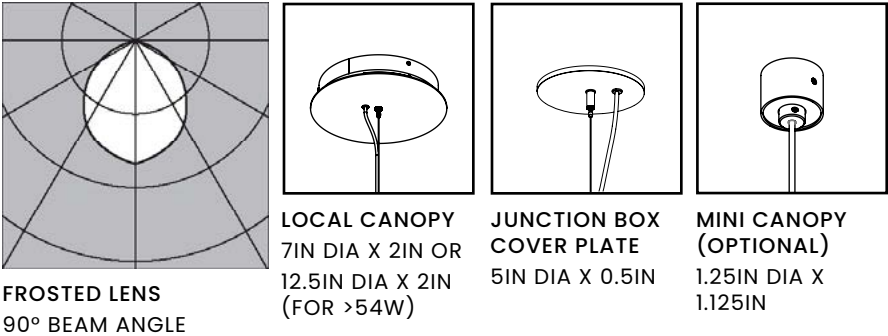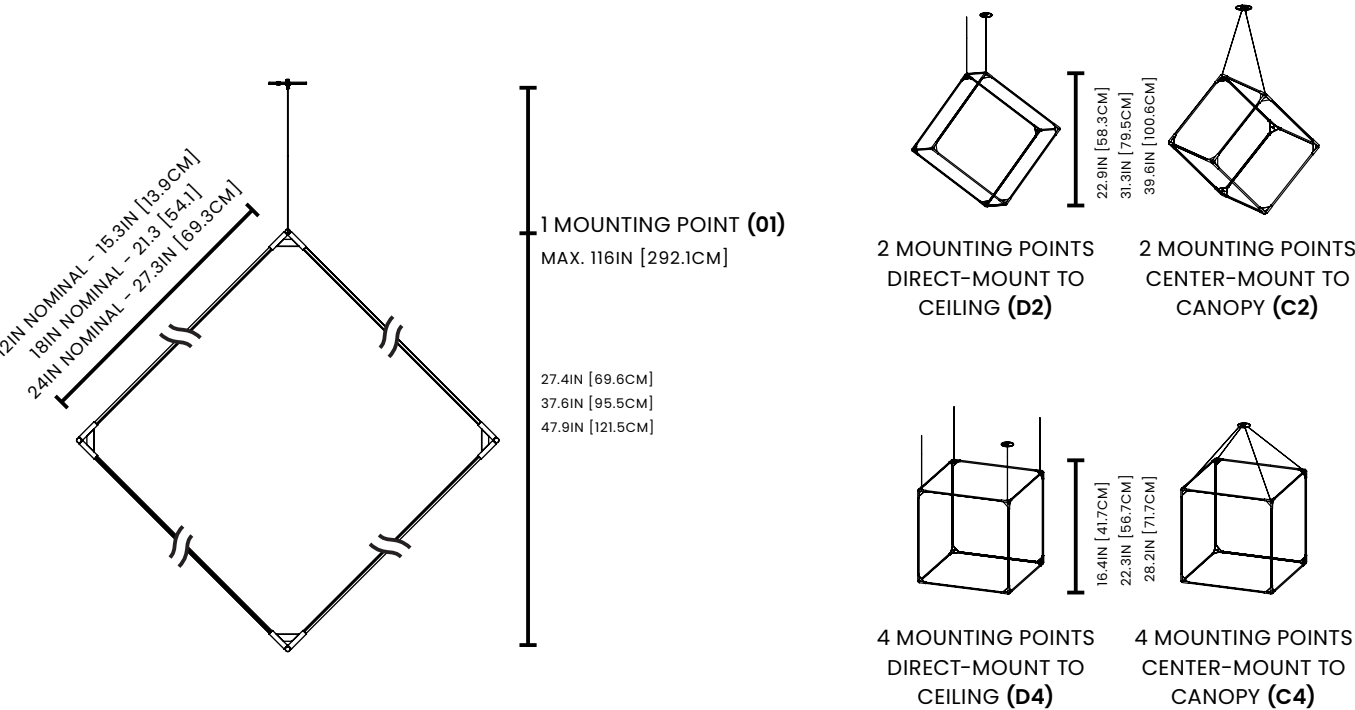

<b>ILLUMINATION</b> CRI 95+, R9 90+ standard 2700K, 3000K, 3500K, 4000K options  <b>12" segment</b> 3600LM delivered/40.8W <b>18" segment</b> 5400LM delivered/61.2W <b>24" segment</b> 7200LM delivered/81.6W 90LM/W 50,000 hrs LED life L80	<b>FINISHES</b> Satin Brass, Black Oxide, Satin Nickel  <b>MATERIALS</b> Solid brass, PMMA  <b>DIMMING</b> 2-Wire/TRIAC/Forward Phase 0-10V 3-Wire See Power Supply section for details Contact Juniper for alternate requirements	<b>MOUNTING</b> (x1 or x3) 1/16" aircraft cables, field adjustable 16ft Clear-jacketed 22AWG co-axial silver cord, field adjustable 1, 2, or 4 mounting point options  <b>SYSTEM RUN</b> Limited by power supply wattage
<b>POWER</b> 24VDC output Class 2 constant voltage power supply 120VAC input voltage Contact Juniper for alternate inputs		

BUILD A SPECIFICATION | THIN Solids Cube

SERIES	FINISH	CONFIGURATION	SEGMENTS	COLOR TEMP	LENS	POWER SUPPLY	MOUNTING POINTS
JPR-THES	0	CUB			F		

**SAMPLE SKU: JPR-THES-01-CUB-24-30-F-R-D2**  
Satin Brass, 24" segments, 3000K, frosted lens, remote power supply, suspended from two corners

**CODE DEFINITIONS**



<b>FINISHES</b>  <b>01</b> Satin Brass  <b>02</b> Black Oxide  <b>03</b> Satin Nickel	<b>POWER SUPPLY OPTIONS</b>  <b>R. REMOTE</b>  STANDARD 120-277V INPUT - 2-WIRE/TRIAC/FORWARD PHASE/ELV  STANDARD 120-277V INPUT - 0-10V  LUTRON 120-277V INPUT - 3-WIRE (UPCHARGE)  <b>L. LOCAL</b>  STANDARD 120-277V INPUT - TRIAC/0-10V/ELV DIMMING
<b>SEGMENTS</b> <b>12</b> 12 inch - 3600LM delivered / 40.8W <b>18</b> 18 inch - 5400LM delivered / 61.2W <b>24</b> 24 inch - 7200LM delivered / 81.6W Contact Juniper for custom segment lengths	
<b>COLOR TEMPERATURE</b> <b>27</b> 2700K <b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K	
<b>LENS</b> <b>F</b> Frosted - 90° beam angle	

- MOUNTING**
- 01** 1 Mounting Point  
Suspended from 1 corner
  - D2** 2 Mounting Points, Direct-Mount to Ceiling  
Suspended from 2 corners
  - C2** 2 Mounting Points, Center-Mount to Canopy  
Suspended from 2 corners
  - D4** 4 Mounting Points, Direct-Mount to Ceiling  
Suspended from 4 corners
  - C4** 4 Mounting Points, Center-Mount to Canopy  
Suspended from 4 corners

Our team will determine correct wattages for power supplies based on chosen configuration. Contact Juniper for custom requirements or further power supply specifications.

Project	Type
Notes	

TECHNICAL | THIN Solids Diamond

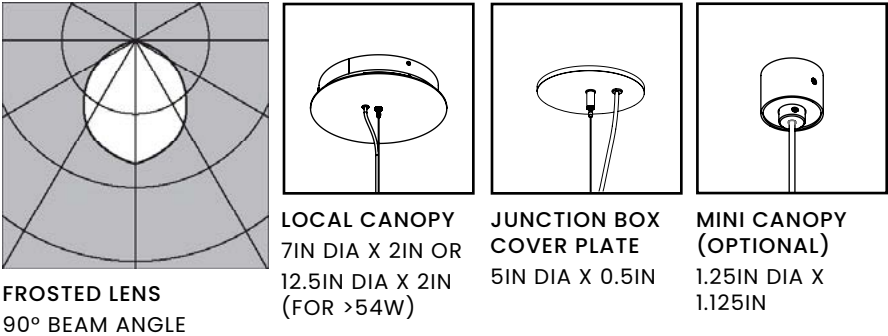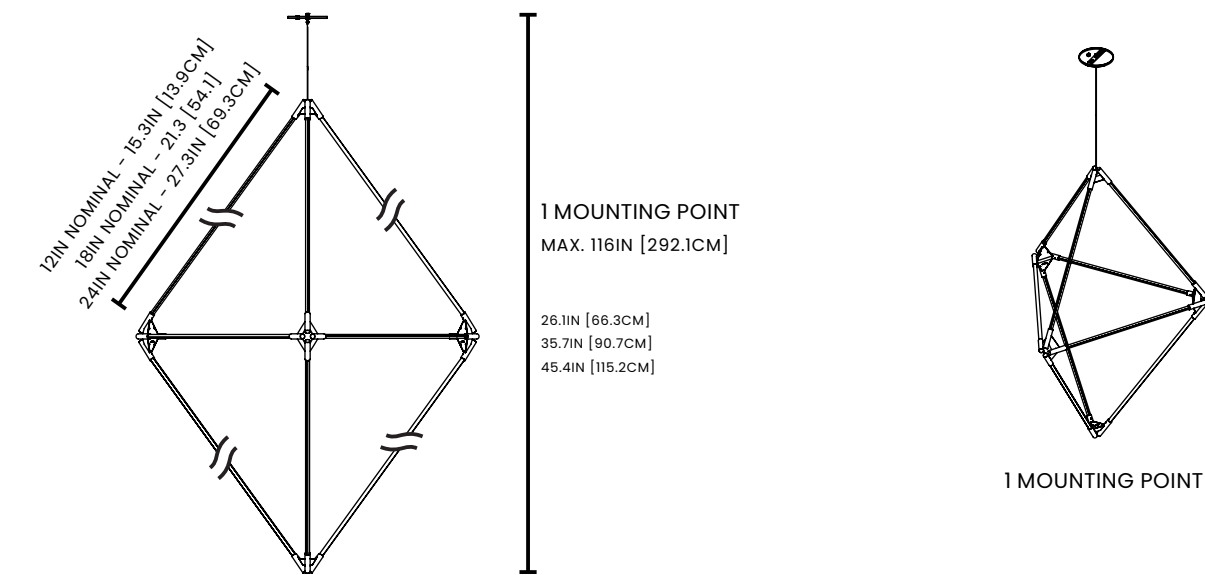

<b>ILLUMINATION</b> CRI 95+, R9 90+ standard 2700K, 3000K, 3500K, 4000K options  <b>12" segment</b> 2700LM delivered/30.6W <b>18" segment</b> 4050LM delivered/45.9W <b>24" segment</b> 5400LM delivered/61.2W 90LM/W 50,000 hrs LED life L80	<b>FINISHES</b> Satin Brass, Black Oxide, Satin Nickel  <b>MATERIALS</b> Solid brass, PMMA  <b>DIMMING</b> 2-Wire/TRIAC/Forward Phase 0-10V 3-Wire See Power Supply section for details Contact Juniper for alternate requirements	<b>MOUNTING</b> (x1 or x3) 1/16" aircraft cables, field adjustable 16ft Clear-jacketed 22AWG co-axial silver cord, field adjustable 1, 2, or 4 mounting point options  <b>SYSTEM RUN</b> Limited by power supply wattage
<b>POWER</b> 24VDC output Class 2 constant voltage power supply 120VAC input voltage Contact Juniper for alternate inputs		

BUILD A SPECIFICATION | THIN Solids Diamond

SERIES	FINISH	CONFIGURATION	SEGMENTS	COLOR TEMP	LENS	POWER SUPPLY	MOUNTING POINTS
JPR-THES	0	DIA			F		0 1

**SAMPLE SKU: JPR-THES-03-DIA-18-35-F-R-01**  
Satin Nickel, 18" segments, 3500K, frosted lens, remote power supply, suspended from one corner

CODE DEFINITIONS

FINISHES



SEGMENTS

- 12** 12 inch - 2700LM delivered / 30.6W
- 18** 18 inch - 4050LM delivered / 45.9W
- 24** 24 inch - 5400LM delivered / 61.2W

Contact Juniper for custom segment lengths

COLOR TEMPERATURE

- 27** 2700K
- 30** 3000K
- 35** 3500K
- 40** 4000K

LENS

- F** Frosted - 90° beam angle

MOUNTING POINTS

- 01** 1 Mounting Point  
Suspended from 1 corner

POWER SUPPLY OPTIONS

R. REMOTE

- STANDARD 120-277V INPUT - 2-WIRE/TRIAC/FORWARD PHASE/ELV
- STANDARD 120-277V INPUT - 0-10V
- LUTRON 120V INPUT - TRIAC DIMMING (40W ) (UPCHARGE)
- LUTRON 120-277V INPUT - 3-WIRE (UPCHARGE)


L. LOCAL

- STANDARD 120-277V INPUT - TRIAC/0-10V/ELV DIMMING


Our team will determine correct wattages for power supplies based on chosen configuration. Contact Juniper for custom requirements or further power supply specifications.

Project	Type
Notes	


TECHNICAL | THIN Multiples Dyad (Vertical)

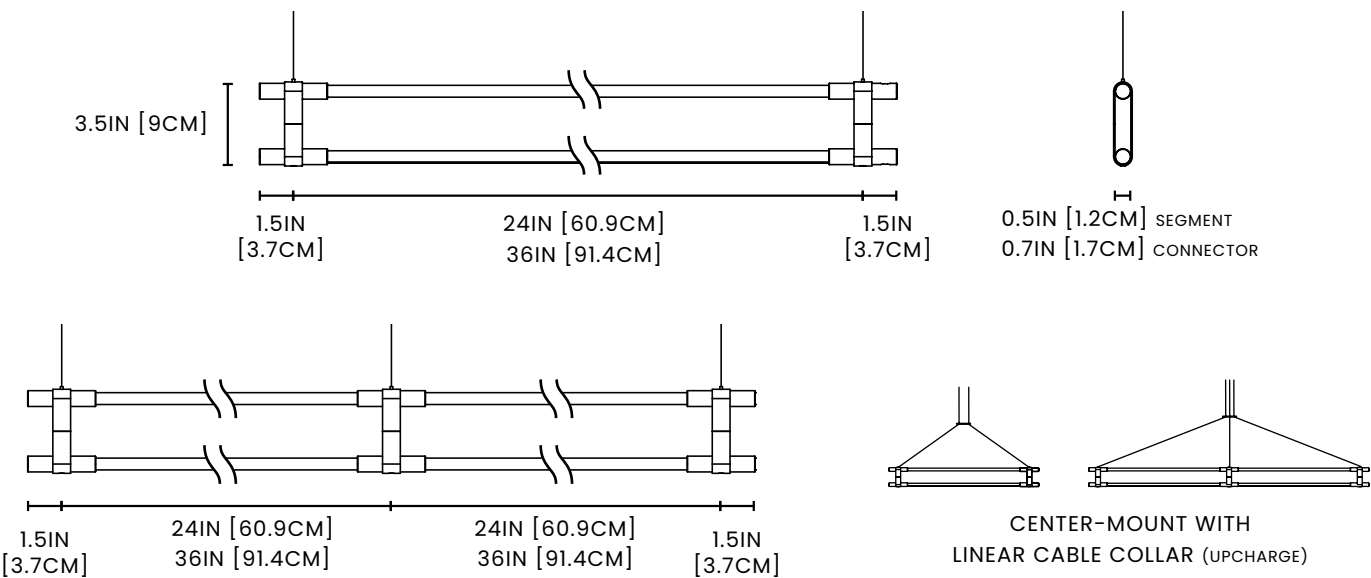


24IN AND 36IN LIGHT SEGMENTS MAY BE COMBINED IN THE SAME FIXTURE  
STANDARD MAX LENGTH PER FIXTURE IS (3) 36" LIGHT SEGMENTS 110.8IN [281.5CM]  
FOR LONGER RUNS, PLEASE CONTACT US




FROSTED LENS  
90° BEAM ANGLE




LOCAL CANOPY  
7IN DIA X 2IN OR  
12.5IN DIA X 2IN  
(FOR >54W)



JUNCTION BOX  
COVER PLATE  
5IN DIA X 0.5IN



MINI CANOPY  
(OPTIONAL)  
1.25IN DIA X  
1.125IN



CABLE COLLAR  
(OPTIONAL)  
3.25IN X 0.75IN

ILLUMINATION

CRI 95+, R9 90+ standard  
2700K, 3000K, 3500K, 4000K options

24" segment 1200LM delivered / 13.6W  
36" segment 1840LM delivered / 19.2W  
90LM/W with clear acrylic lens  
50,000 hrs LED life L80

POWER

24VDC output Class 2 constant  
voltage power supply  
120VAC input voltage  
Contact Juniper for alternate inputs

FINISHES

Satin Brass, Black Oxide, Satin Nickel

MATERIALS

Solid brass, PMMA

DIMMING

2-Wire/TRIAC/Forward Phase  
0-10V  
3-Wire  
See Power Supply section for details  
Contact Juniper for alternate  
requirements

MOUNTING

10ft 1/16" aircraft cable, field  
adjustable  
16ft Clear-jacketed 22AWG co-axial  
silver cord, field adjustable  
Direct-mounting and center-  
mounting with Linear Cable Collar  
options available (for up to 2  
connected segments)

SYSTEM RUN

Limited by power supply wattage only

BUILD A SPECIFICATION | THIN Multiples Dyad (Vertical)

SERIES  
JPR-THES

FINISH  
0

CONFIGURATION  
M D V

SEGMENTS  
[ ][ ][ ]

COLOR TEMP  
[ ][ ]

LENS  
F

POWER SUPPLY  
[ ]

MOUNTING  
[ ][ ]

SAMPLE SKU: JPR-THES-01-MDV-333-30-F-R-DM  
Satin Brass, (3) 36" segments, 3000K, frosted lens, remote power  
supply, direct-mount to ceiling

CODE DEFINITIONS

FINISHES

01 Satin Brass 02 Black Oxide 03 Satin Nickel

SEGMENTS

0 no segment  
2 24 inch segment - 1200LM delivered / 13.6W  
3 36 inch segment - 1840LM delivered / 19.2W

Each digit represents a single segment, e.g. 000023 is (1) 24" segment and (1) 36" segment. Contact Juniper for custom segment lengths.

COLOR TEMPERATURE

27 2700K  
30 3000K  
35 3500K  
40 4000K

LENS

F Frosted - 90° beam angle

MOUNTING

CX Center-Mount to Canopy without Cable Collar  
Includes corresponding canopy  
CC Center-Mount to Canopy with Cable Collar (upcharge)  
Includes corresponding canopy  
DM Direct-Mount to Ceiling  
Includes corresponding canopy for a single power  
cord with ceiling grippers for other mounting points

POWER SUPPLY OPTIONS

R. REMOTE

STANDARD 120-277V INPUT - 2-WIRE/TRIAC/FORWARD  
PHASE/ELV  
  
STANDARD 120-277V INPUT - 0-10V  
  
LUTRON 120V INPUT - TRIAC DIMMING (40W ) (UPCHARGE)  
  
LUTRON 120-277V INPUT - 3-WIRE (UPCHARGE)

L. LOCAL


STANDARD 120-277V INPUT - TRIAC/0-10V/ELV DIMMING

Our team will determine correct wattages for power supplies based on chosen configuration. Contact Juniper for custom requirements or further power supply specifications.


Project	Type
Notes	



TECHNICAL | THIN Multiples Dyad (Horizontal)

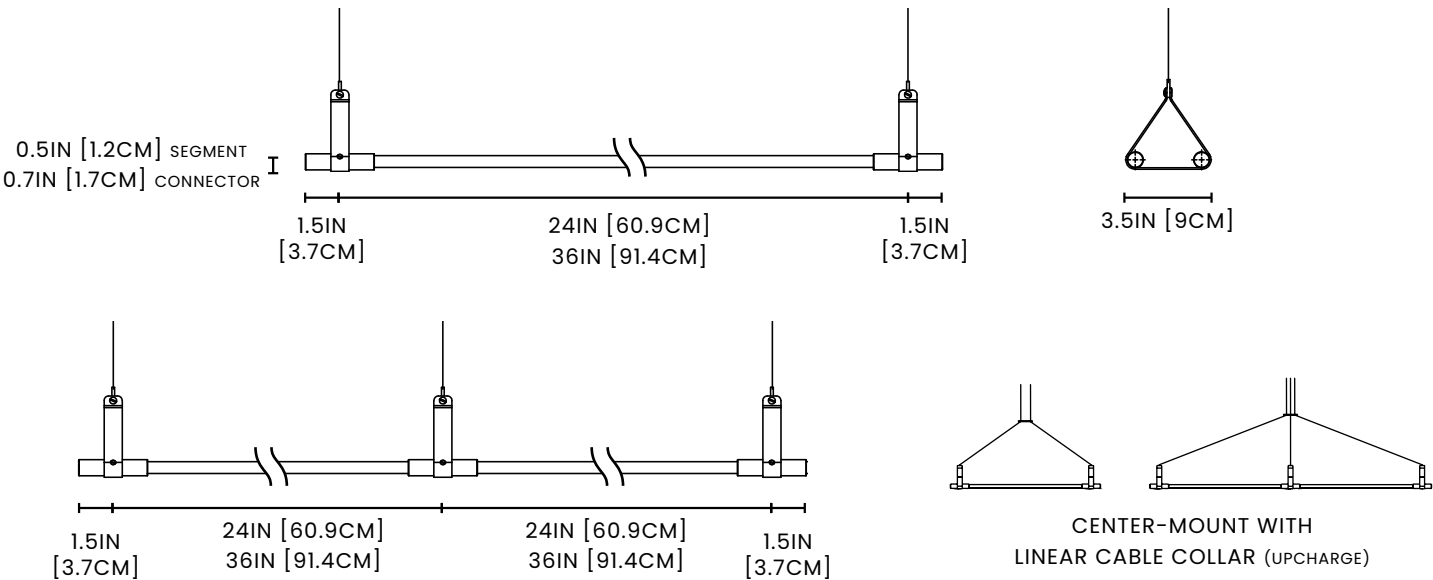

24IN AND 36IN LIGHT SEGMENTS MAY BE COMBINED IN THE SAME FIXTURE  
STANDARD MAX LENGTH PER FIXTURE IS (3) 36" LIGHT SEGMENTS 110.8IN [281.5CM]  
FOR LONGER RUNS, PLEASE CONTACT US

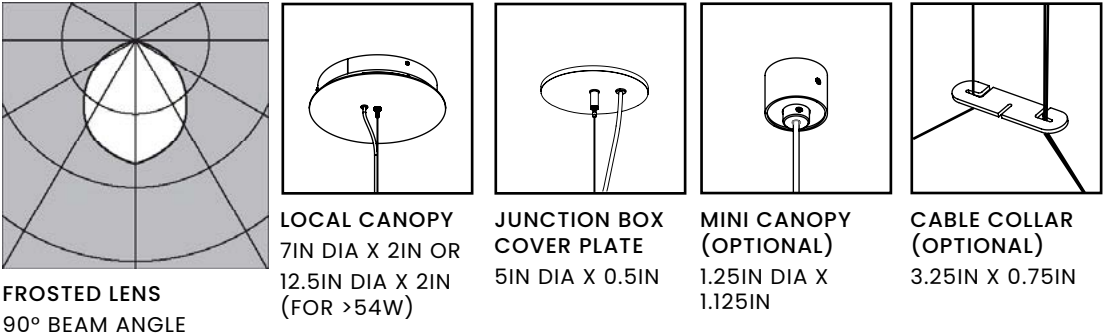

<b>ILLUMINATION</b> CRI 95+, R9 90+ standard 2700K, 3000K, 3500K, 4000K options  <b>24" segment</b> 1200LM delivered / 13.6W <b>36" segment</b> 1840LM delivered / 19.2W 90 LM/W with clear acrylic lens 50,000 hrs LED life L80	<b>FINISHES</b> Satin Brass, Black Oxide, Satin Nickel  <b>MATERIALS</b> Solid brass, PMMA  <b>DIMMING</b> 2-Wire/TRIAC/Forward Phase 0-10V 3-Wire See Power Supply section for details Contact Juniper for alternate requirements	<b>MOUNTING</b> 10ft 1/16" aircraft cable, field adjustable 16ft Clear-jacketed 22AWG co-axial silver cord, field adjustable Direct-mounting and center-mounting with Linear Cable Collar options available (for up to 2 connected segments)  <b>SYSTEM RUN</b> Limited by power supply wattage only
---	--	--


BUILD A SPECIFICATION | THIN Multiples Dyad (Horizontal)

SERIES	FINISH	CONFIGURATION	SEGMENTS	COLOR TEMP	LENS	POWER SUPPLY	MOUNTING
JPR-THES	- 0	- M D H	-	-	- F	-	-


**SAMPLE SKU: JPR-THES-01-MDH-022-30-C-R-CC**  
Satin Brass, (2) 24" segments, 3000K, clear lens, remote power supply, center-mount with Linear Cable Collar

<b>CODE DEFINITIONS</b>	<b>POWER SUPPLY OPTIONS</b>
<b>FINISHES</b>  <b>01</b> Satin Brass <b>02</b> Black Oxide <b>03</b> Satin Nickel	<b>R. REMOTE</b>  STANDARD 120-277V INPUT - 2-WIRE/TRIAC/FORWARD PHASE/ELV  STANDARD 120-277V INPUT - 0-10V  LUTRON 120V INPUT - TRIAC DIMMING (40W ) (UPCHARGE)  LUTRON 120-277V INPUT - 3-WIRE (UPCHARGE)  <b>L. LOCAL</b>  STANDARD 120-277V INPUT - TRIAC/0-10V/ELV DIMMING
<b>SEGMENTS</b> <b>0</b> no segment <b>2</b> 24 inch segment - 1200LM delivered / 13.6W <b>3</b> 36 inch segment - 1840LM delivered / 19.2W  Each digit represents a single segment, e.g. 000023 is (1) 24" segment and (1) 36" segment. Contact Juniper for custom segment lengths.	
<b>COLOR TEMPERATURE</b> <b>27</b> 2700K <b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K	
<b>LENS</b> <b>C</b> Clear - 40° beam angle <b>F</b> Frosted - 90° beam angle	
<b>MOUNTING</b> <b>CX</b> Center-Mount to Canopy without Cable Collar Includes corresponding canopy <b>CC</b> Center-Mount to Canopy with Cable Collar (upcharge) Includes corresponding canopy <b>DM</b> Direct-Mount to Ceiling Includes corresponding canopy for a single power cord with ceiling grippers for other mounting points	Our team will determine correct wattages for power supplies based on chosen configuration. Contact Juniper for custom requirements or further power supply specifications.
Project	Type
Notes	


TECHNICAL | THIN Multiples Triad

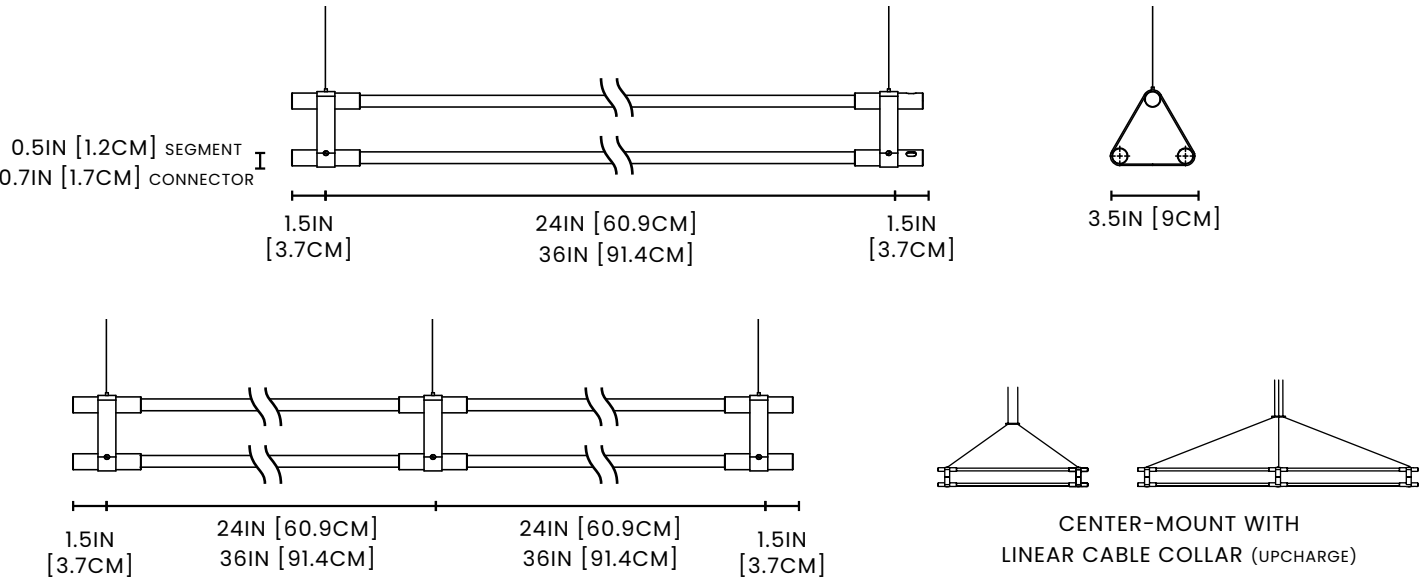


24IN AND 36IN LIGHT SEGMENTS MAY BE COMBINED IN THE SAME FIXTURE.  
STANDARD MAX LENGTH PER FIXTURE IS (2) 36" LIGHT SEGMENTS 75IN [190.5CM]  
FOR LONGER RUNS, PLEASE CONTACT US




FROSTED LENS  
90° BEAM ANGLE




LOCAL CANOPY  
7IN DIA X 2IN OR  
12.5IN DIA X 2IN  
(FOR >54W)



JUNCTION BOX  
COVER PLATE  
5IN DIA X 0.5IN



MINI CANOPY  
(OPTIONAL)  
1.25IN DIA X  
1.125IN



CABLE COLLAR  
(OPTIONAL)  
3.25IN X 0.75IN

<b>ILLUMINATION</b> CRI 95+, R9 90+ standard 2700K, 3000K, 3500K, 4000K options  <b>24" segment</b> 1800LM delivered / 20.4W <b>36" segment</b> 2760LM delivered / 28.8W 90LM/W 50,000 hrs LED life L80	<b>FINISHES</b> Satin Brass, Black Oxide, Satin Nickel  <b>MATERIALS</b> Solid brass, PMMA  <b>DIMMING</b> 2-Wire/TRIAC/Forward Phase 0-10V 3-Wire See Power Supply section for details Contact Juniper for alternate requirements	<b>MOUNTING</b> 10ft 1/16" aircraft cable, field adjustable 16ft Clear-jacketed 22AWG co-axial silver cord, field adjustable Direct-mounting and center-mounting with Linear Cable Collar options available (for up to 2 connected segments)  <b>SYSTEM RUN</b> Limited by power supply wattage only
--	---	--

BUILD A SPECIFICATION | THIN Multiples Triad



SERIES	FINISH	CONFIGURATION	SEGMENTS	COLOR TEMP	LENS	POWER SUPPLY	MOUNTING
JPR-THES	- 0	- M T R	-	-	- F	-	-

**SAMPLE SKU: JPR-THES-01-MTR-033-30-F-R-DM**  
Satin Brass, (2) 36" segments, 3000K, frosted lens, remote power supply, direct-mount to ceiling


<b>CODE DEFINITIONS</b>	
<b>FINISHES</b>  <b>01</b> Satin Brass  <b>02</b> Black Oxide  <b>03</b> Satin Nickel	<b>POWER SUPPLY OPTIONS</b>  <b>R. REMOTE</b>  STANDARD 120-277V INPUT - 2-WIRE/TRIAC/FORWARD PHASE/ELV  STANDARD 120-277V INPUT - 0-10V  LUTRON 120V INPUT - TRIAC DIMMING (40W ) (UPCHARGE)  LUTRON 120-277V INPUT - 3-WIRE (UPCHARGE)  <b>L. LOCAL</b>  STANDARD 120-277V INPUT - TRIAC/0-10V/ELV DIMMING  Our team will determine correct wattages for power supplies based on chosen configuration. Contact Juniper for custom requirements or further power supply specifications.
<b>SEGMENTS</b> <b>0</b> no segment <b>2</b> 24 inch segment - 1800LM delivered / 20.4W <b>3</b> 36 inch segment - 2760LM delivered / 28.8W  Each digit represents a single segment, e.g. 000023 is (1) 24" segment and (1) 36" segment. Contact Juniper for custom segment lengths.	
<b>COLOR TEMPERATURE</b> <b>27</b> 2700K <b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K	
<b>LENS</b> <b>F</b> Frosted - 90° beam angle	
<b>MOUNTING</b> <b>CX</b> Center-Mount to Canopy without Cable Collar Includes corresponding canopy <b>CC</b> Center-Mount to Canopy with Cable Collar (upcharge) Includes corresponding canopy <b>DM</b> Direct-Mount to Ceiling Includes corresponding canopy for a single power cord with ceiling grippers for other mounting points	

Project	Type
Notes	


TECHNICAL | THIN Multiples Vertical Suspension Triad

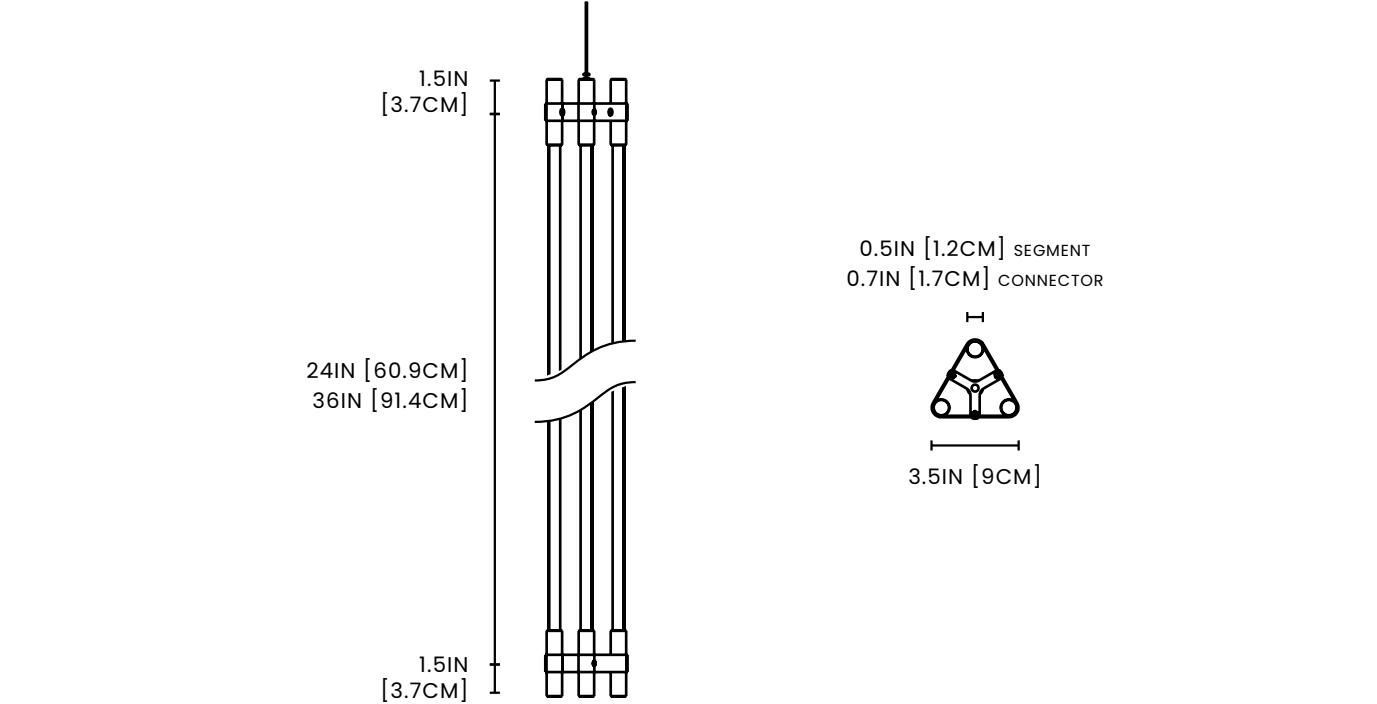


FROSTED LENS  
90° BEAM ANGLE



LOCAL CANOPY  
7IN DIA X 2IN




JUNCTION BOX  
COVER PLATE  
5IN DIA X 0.5IN



MINI CANOPY  
(OPTIONAL)  
1.25IN DIA X  
1.125IN

<b>ILLUMINATION</b> CRI 95+, R9 90+ standard 2700K, 3000K, 3500K, 4000K options  <b>24" segment</b> 1800LM delivered / 20.4W <b>36" segment</b> 2760LM delivered / 28.8W 90LM/W 50,000 hrs LED life L80	<b>FINISHES</b> Satin Brass, Black Oxide, Satin Nickel  <b>MATERIALS</b> Solid brass, PMMA  <b>DIMMING</b> 2-Wire/TRIAC/Forward Phase 0-10V 3-Wire See Power Supply section for details Contact Juniper for alternate requirements	<b>MOUNTING</b> 10ft 1/16" aircraft cable, field adjustable 16ft Clear-jacketed 22AWG co-axial silver cord, field adjustable  <b>SYSTEM RUN</b> Limited to one section per fixture
<b>POWER</b> 24VDC output Class 2 constant voltage power supply 120VAC input voltage Contact Juniper for alternate inputs		

BUILD A SPECIFICATION | THIN Multiples Vertical Suspension Triad

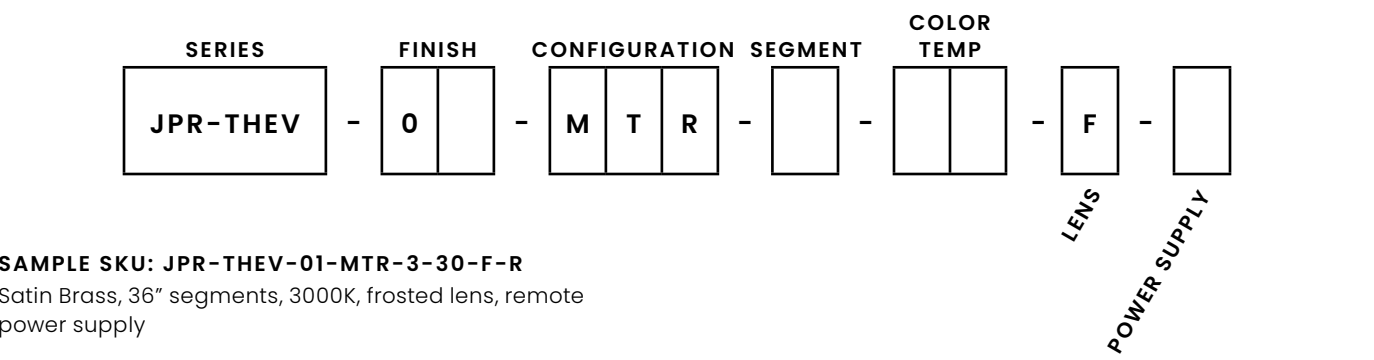

**SAMPLE SKU: JPR-THEV-01-MTR-3-30-F-R**  
Satin Brass, 36" segments, 3000K, frosted lens, remote power supply

CODE DEFINITIONS

FINISHES



**01** Satin Brass    **02** Black Oxide    **03** Satin Nickel

SEGMENTS

**2** 24 inch segment - 1800LM delivered / 20.4W  
**3** 36 inch segment - 2760LM delivered / 28.8W  
  
*Note:* the chosen digit will reflect the length of all segments in this fixture. e.g. 2 represents all segments as 24 inches.  
Contact Juniper for custom segment lengths

COLOR TEMPERATURE

**27** 2700K  
**30** 3000K  
**35** 3500K  
**40** 4000K

LENS

**F** Frosted - 90° beam angle

POWER SUPPLY OPTIONS

R. REMOTE

STANDARD 120-277V INPUT - 2-WIRE/TRIAC/FORWARD PHASE/ELV  
  
STANDARD 120-277V INPUT - 0-10V  
  
LUTRON 120V INPUT - TRIAC DIMMING (40W ) (UPCHARGE)  
  
LUTRON 120-277V INPUT - 3-WIRE (UPCHARGE)


L. LOCAL

STANDARD 120-277V INPUT - TRIAC/0-10V/ELV DIMMING


Our team will determine correct wattages for power supplies based on chosen configuration. Contact Juniper for custom requirements or further power supply specifications.

Project	Type
Notes	

TECHNICAL | THIN Multiples Tetrad

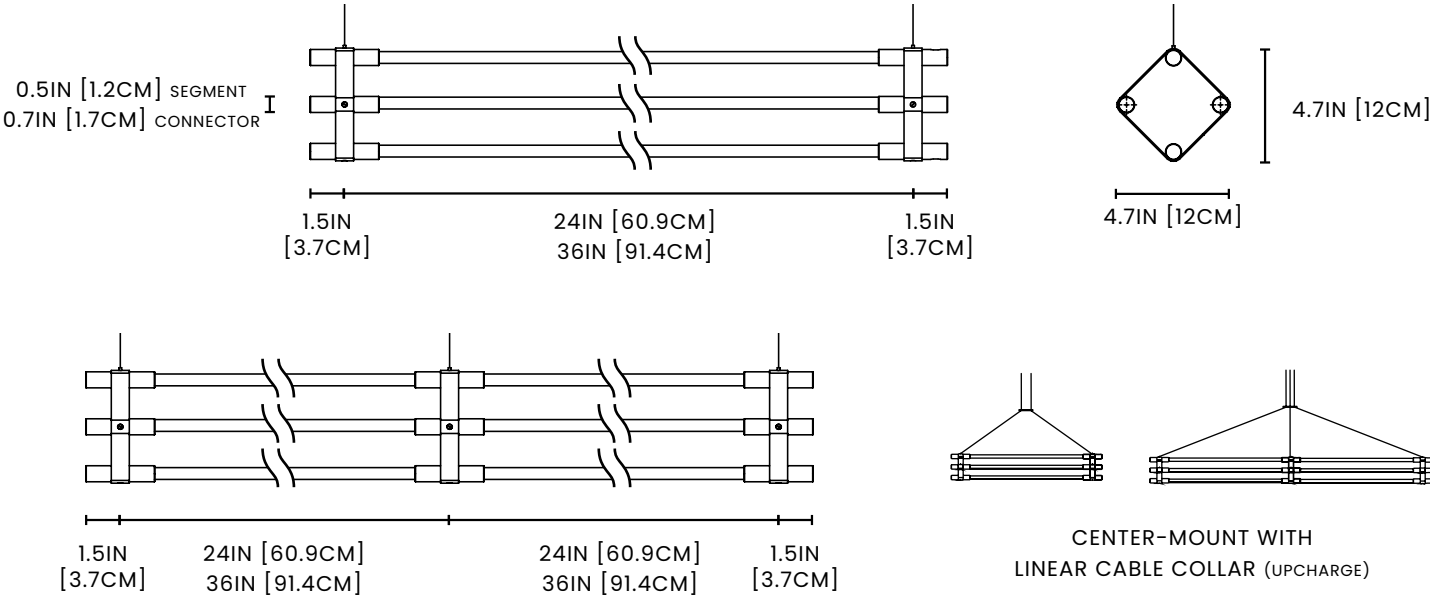

24IN AND 36IN LIGHT SEGMENTS MAY BE COMBINED IN THE SAME FIXTURE.  
STANDARD MAX LENGTH PER FIXTURE IS (2) 36" LIGHT SEGMENTS 75IN [190.5CM]  
FOR LONGER RUNS, PLEASE CONTACT US

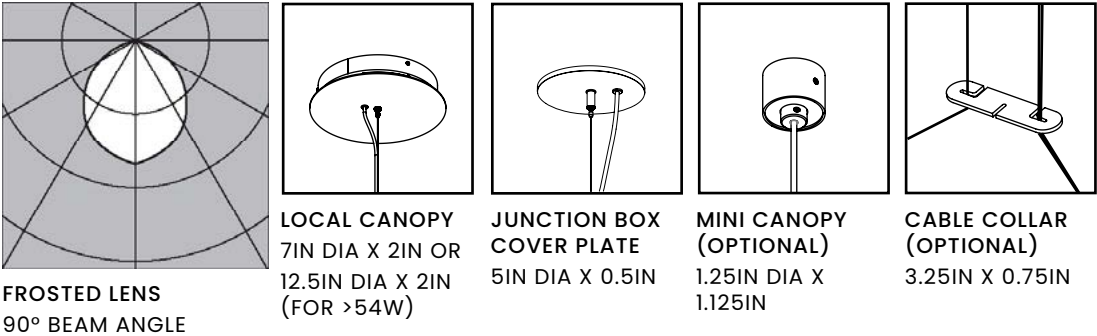

<b>ILLUMINATION</b> CRI 95+, R9 90+ standard 2700K, 3000K, 3500K, 4000K options  <b>24" segment</b> 2400LM delivered/27.2W <b>36" segment</b> 3680LM delivered/38.4W 90 LM/W 50,000 hrs LED life L80	<b>FINISHES</b> Satin Brass, Black Oxide, Satin Nickel  <b>MATERIALS</b> Solid brass, PMMA  <b>DIMMING</b> 2-Wire/TRIAC/Forward Phase 0-10V 3-Wire See Power Supply section for details Contact Juniper for alternate requirements	<b>MOUNTING</b> 10ft 1/16" aircraft cable, field adjustable 16ft Clear-jacketed 22AWG co-axial silver cord, field adjustable Direct-mounting and center-mounting with Linear Cable Collar options available (for up to 2 connected segments)  <b>SYSTEM RUN</b> Limited by power supply wattage only
<b>POWER</b> 24VDC output Class 2 constant voltage power supply 120VAC input voltage Contact Juniper for alternate inputs		

BUILD A SPECIFICATION | THIN Multiples Tetrad



SERIES	FINISH	CONFIGURATION	SEGMENTS	COLOR TEMP	LENS	POWER SUPPLY	MOUNTING
JPR-THES	- 0	- M T E	-	-	- F	-	-

**SAMPLE SKU: JPR-THES-01-MTE-003-30-F-R-DM**  
Satin Brass, (1) 36" segment, 3000K, frosted lens, remote power supply, direct-mount to ceiling


<b>CODE DEFINITIONS</b>	
<b>FINISHES</b>  <b>01</b> Satin Brass  <b>02</b> Black Oxide  <b>03</b> Satin Nickel	<b>POWER SUPPLY OPTIONS</b>  <b>R. REMOTE</b>  STANDARD 120-277V INPUT - 2-WIRE/TRIAC/FORWARD PHASE/ELV  STANDARD 120-277V INPUT - 0-10V  LUTRON 120V INPUT - TRIAC DIMMING (40W ) (UPCHARGE)  LUTRON 120-277V INPUT - 3-WIRE (UPCHARGE)  <b>L. LOCAL</b>  STANDARD 120-277V INPUT - TRIAC/0-10V/ELV DIMMING
<b>SEGMENTS</b> <b>0</b> no segment <b>2</b> 24 inch segment - 2400LM delivered / 27.2W <b>3</b> 36 inch segment - 3680LM delivered / 38.4W  Each digit represents a single segment, e.g. 000023 is (1) 24" segment and (1) 36" segment. Contact Juniper for custom segment lengths.	
<b>COLOR TEMPERATURE</b> <b>27</b> 2700K <b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K	
<b>LENS</b> <b>F</b> Frosted - 90° beam angle	
<b>MOUNTING</b> <b>CX</b> Center-Mount to Canopy without Cable Collar Includes corresponding canopy <b>CC</b> Center-Mount to Canopy with Cable Collar (upcharge) Includes corresponding canopy <b>DM</b> Direct-Mount to Ceiling Includes corresponding canopy for a single power cord with ceiling grippers for other mounting points	Our team will determine correct wattages for power supplies based on chosen configuration. Contact Juniper for custom requirements or further power supply specifications.

Project	Type
Notes	


TECHNICAL | THIN Multiples Vertical Suspension Tetrad

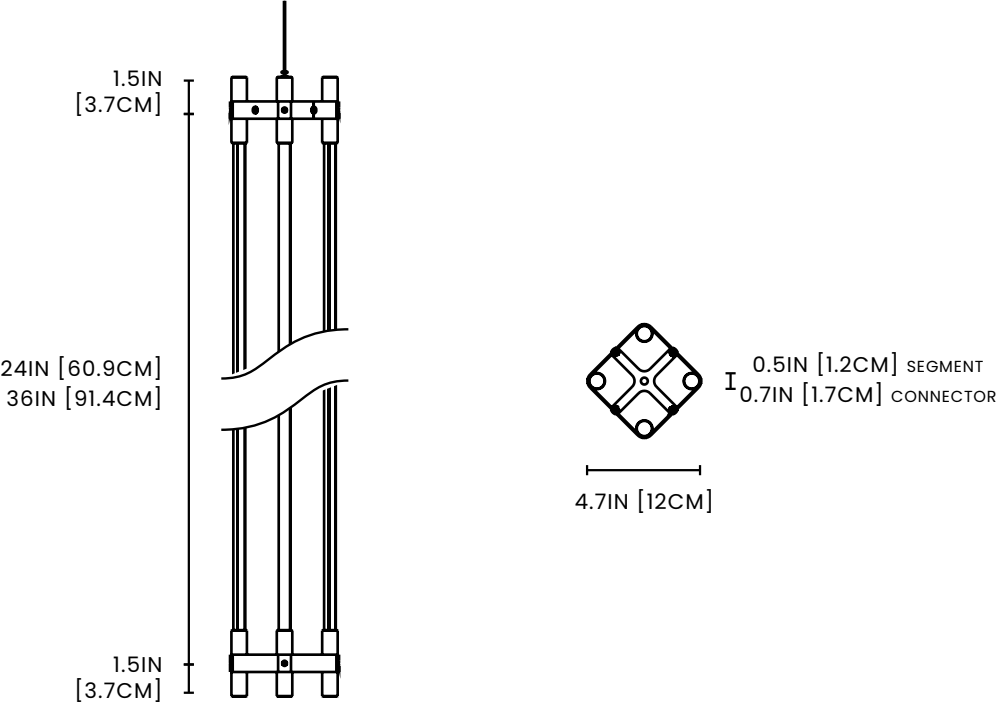


FROSTED LENS  
90° BEAM ANGLE



LOCAL CANOPY  
7IN DIA X 2IN



JUNCTION BOX  
COVER PLATE  
5IN DIA X 0.5IN



MINI CANOPY  
(OPTIONAL)  
1.25IN DIA X  
1.125IN


<b>ILLUMINATION</b>
CRI 95+, R9 90+ standard 2700K, 3000K, 3500K, 4000K options
<b>24" segment</b> 2400LM delivered/27.2W <b>36" segment</b> 3680LM delivered/38.4W 90 LM/W 50,000 hrs LED life L80

<b>POWER</b>
24VDC output Class 2 constant voltage power supply 120VAC input voltage Contact Juniper for alternate inputs

<b>FINISHES</b>
Satin Brass, Black Oxide, Satin Nickel
<b>MATERIALS</b>
Solid brass, PMMA
<b>DIMMING</b>
2-Wire/TRIAC/Forward Phase 0-10V 3-Wire See Power Supply section for details Contact Juniper for alternate requirements

<b>MOUNTING</b>
10ft 1/16" aircraft cable, field adjustable 16ft Clear-jacketed 22AWG co-axial silver cord, field adjustable
<b>SYSTEM RUN</b>
Limited to one section per fixture

BUILD A SPECIFICATION | THIN Multiples Vertical Suspension

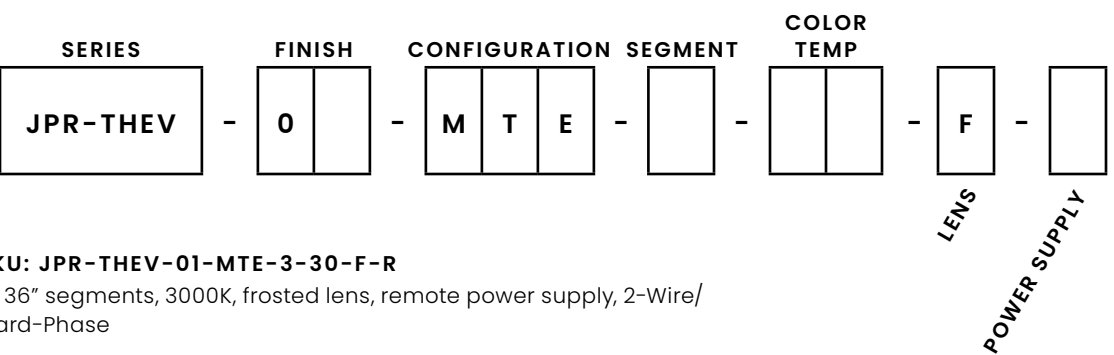

**SAMPLE SKU: JPR-THEV-01-MTE-3-30-F-R**  
Satin Brass, 36" segments, 3000K, frosted lens, remote power supply, 2-Wire/  
TRIAC/Forward-Phase

CODE DEFINITIONS

FINISHES



**01** Satin Brass    **02** Black Oxide    **03** Satin Nickel

SEGMENTS

**2** 24 inch segment - 2400LM delivered / 27.2W  
**3** 36 inch segment - 3680LM delivered / 38.4W  
*Note:* the chosen digit will reflect the length of all segments  
in this fixture. e.g. 2 represents all segments as 24 inches.  
Contact Juniper for custom segment lengths

COLOR TEMPERATURE

**27** 2700K  
**30** 3000K  
**35** 3500K  
**40** 4000K

LENS

**F** Frosted - 90° beam angle

POWER SUPPLY OPTIONS

R. REMOTE

STANDARD 120-277V INPUT - 2-WIRE/TRIAC/FORWARD  
PHASE/ELV  
  
STANDARD 120-277V INPUT - 0-10V  
  
LUTRON 120V INPUT - TRIAC DIMMING (40W ) (UPCHARGE)  
  
LUTRON 120-277V INPUT - 3-WIRE (UPCHARGE)

L. LOCAL


STANDARD 120-277V INPUT - TRIAC/0-10V/ELV DIMMING

Our team will determine correct wattages for power supplies  
based on chosen configuration. Contact Juniper for custom  
requirements or further power supply specifications.


Project	Type
Notes	




TECHNICAL | THIN Shared Task Lamp

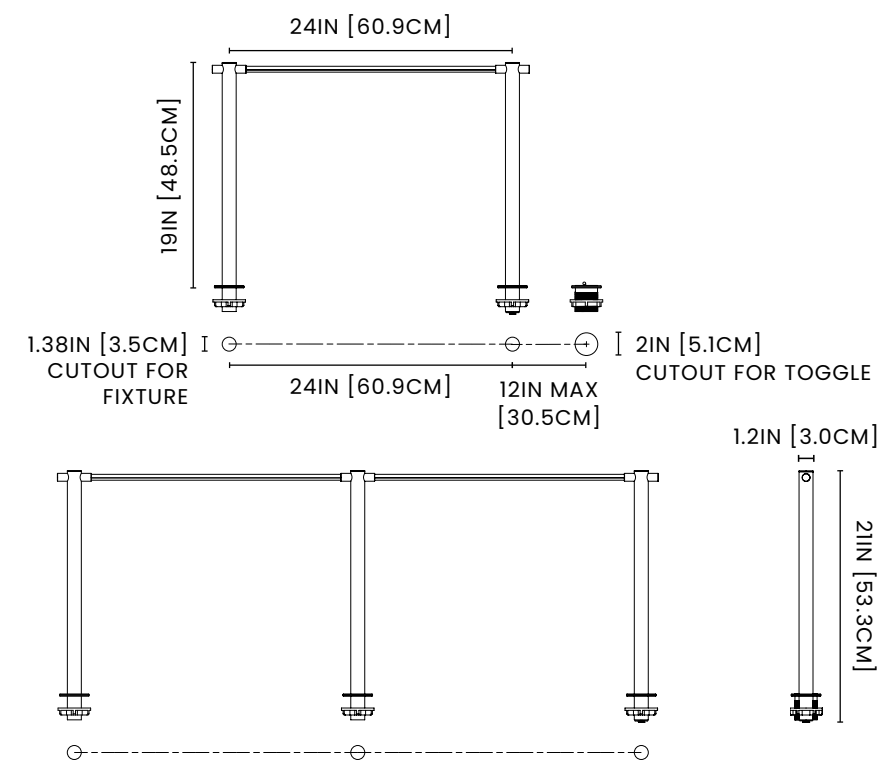


LIGHT SEGMENTS MAY BE COMBINED IN THE SAME FIXTURE  
STANDARD MAX LENGTH PER FIXTURE IS (3) 24" LIGHT SEGMENTS 75IN [190.5CM]  
FOR LONGER RUNS, PLEASE CONTACT US




FROSTED LENS  
90° BEAM ANGLE




PLUG-IN POWER  
SUPPLY



GROUND  
CONTROL  
TOGGLE SWITCH  
INSET SWITCH,  
2.5IN X 2.5IN



GROUND  
CONTROL  
DIMMER DIAL  
INSET DIMMER,  
2.5IN X 2.5IN



GROUND  
CONTROL  
DIMMER KNOB  
INSET DIMMER,  
2.5IN X 2.5IN

**ILLUMINATION**  
CRI 95+, R9 90+ standard  
2700K, 3000K, 3500K, 4000K options  
  
**24" segment** 600LM delivered / 6.8W  
**36" segment** 920LM delivered / 9.6W  
90LM/W  
50,000 hrs LED life L80

**POWER**  
100-120VAC Input Voltage  
24VDC Class 2 Constant Voltage  
Contact Juniper for alternate inputs  
  
**FINISHES**  
Satin Brass, Black Oxide, Satin Nickel

**MATERIALS**  
Solid brass, PMMA  
  
**SYSTEM RUN**  
Limited by power supply wattage only

BUILD A SPECIFICATION | THIN Shared Task Lamp

SERIES	FINISH	SEGMENTS	STANDOFF	COLOR TEMP	LENS	POWER SUPPLY	POWER ACCESSORY
JPR-THET	0		4 8 5		F		

**SAMPLE SKU: JPR-THET-01-0002-090-30-C-P-DKTS**  
Satin Brass, (1) 24" segment, 90mm standoffs, 3000K, clear lens, Plug-In power supply, controlled by Ground Control Toggle Switch

CODE DEFINITIONS

FINISHES



01 Satin Brass



02 Black Oxide



03 Satin Nickel

SEGMENTS

0 no segment  
2 24 inch segment - 600LM delivered / 6.8W  
3 36 inch segment - 3680LM delivered / 9.6W  
*note:* each digit represents a single segment, e.g. 0022 is (2) 24" segments  
Contact Juniper for custom segment lengths

STANDOFF LENGTH

485 485mm Standoffs

COLOR TEMPERATURE

27 2700K  
30 3000K  
35 3500K  
40 4000K

LENS

F Frosted - 90° beam angle

POWER SUPPLY

P. PLUG-IN  
☐ 24VDC, 1.67A POWER SUPPLY  
3 meters of cord included

Contact Juniper for alternate dimming requirements

POWER ACCESSORY

DKTS Ground Control Toggle Switch  
DKDK Ground Control Dimmer Knob  
DKDD Ground Control Dimmer Dial

\*Brass Unifying Plate sold separately.

Project	Type
Notes	

FREQUENTLY ASKED QUESTIONS

Are there more custom options than what is listed in this product guide?

Our products have the ability to be customized to fit any setting or electrical need. If you have requests outside the product specifications or need to adjust the product for compatibility with your space, please contact us.

Do you offer trade discounts?

We are proud to support the industry by offering trade discounts to professionals. Visit our website to apply for the Trade Program. Once you are approved, you'll receive our standard trade discount with volume pricing options.

Do you have a showroom?

Yes! Our showroom is located in Soho, New York on Crosby and Howard Street. We ask that you call 347-799-2915 to schedule an appointment in advance. One of our sales representatives will guide you through our product line and answer your questions.

How do I get my order as quickly as possible?

Our products are meticulously crafted. Lead times can vary depending on the product ordered and production

1. Place your order quickly.

To ensure that you will receive fixtures within your project’s time constraints, we encourage placing your order at least 6-8 weeks prior to installation date.

2. Put a 50% deposit down, or pay in full.

Our policy to begin production starts with a 50% deposit. Fixtures will be shipped after the payment balance has been received.

3. Stay in touch with us.

Should there be any changes to our production schedule or any early shipments, you will be contacted by Juniper as a standard practice. Make sure our emails don’t get tucked away in a SPAM folder in case we’re trying to reach you, or save our number in your contacts to know when we’re calling!

How do I contact Juniper?

Our hours are 9AM – 5PM EST, Monday – Friday. We can be reached through the email address or phone number seen at the bottom of this page. Emails are usually addressed within 24 hours.

Where can I find more information on orders, returns, and shipping inquiries?

Our Terms & Conditions can be found [here](#) on our website. Our terms include information on placing orders, returns, pricing, payment, repair policies, and more.

CARE INSTRUCTIONS

Like other natural metals, brass will patina over time, with the natural yellow hues intensifying over time. Juniper protects its brass with a mild matte lacquer to delay coloration of the metal, and to protect it from exposure to humidity and natural oils.

In order to remove dirt, dust and fingerprints; gently wipe the lamp with a damp cloth.

**Do not use any chemical cleaning solutions; especially those containing ammonia**, as this will damage the surface finish of the brass. Do not use vinegar.

Do not drop or apply excessive force on any part or joint of the lamp.

Do not attempt to disassemble or modify it in any way except for recycling.

Do not use the lamp for any purpose other than its intended use.

**Use indoors only.**

**Please contact us should the lamp not operate as described, and we will be happy to assist you.**

WWW.JUNIPER-DESIGN.COM

1 CROSBY STREET | 157 WATER STREET  
NEW YORK, NY 10012 | SOUTHTON, CT 06489

+1-347-799-2915  
INFO@JUNIPER-DESIGN.COM

     
@JUNIPERDESIGNNY

ALL RIGHTS RESERVED  
© 2019 JUNIPER DESIGN GROUP INC.