



JUNIPER®

FLUTES DORIAN ARRAY

Remote Installation Guide

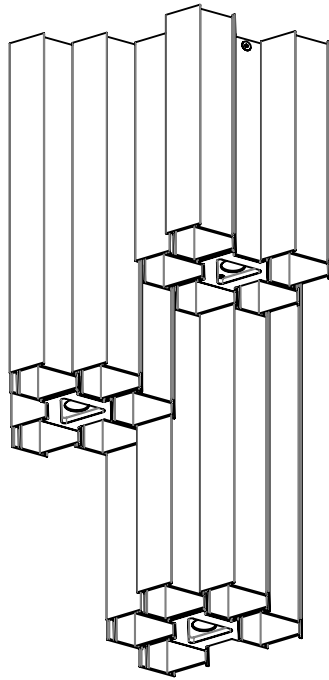

18 IN

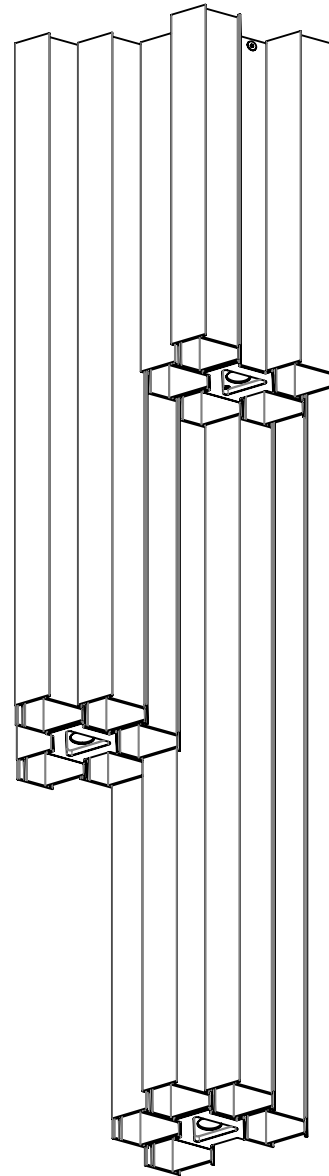


36 IN

WARNING

A LICENSED ELECTRICIAN SHOULD PERFORM INSTALLATION IN ACCORDANCE WITH THE NATIONAL ELECTRIC CODE (NEC) AND RELEVANT LOCAL CODES. DISCONNECT MAIN POWER AT THE SOURCE PRIOR TO INSTALLATION.


INSTRUCTIONS MEANT FOR A REMOTE CLASS 2 DRIVER.

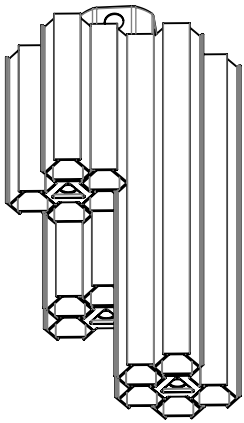POWER FEED OPTIONS**JUNCTION BOX MOUNTED**

FOR FIXTURES WIRED TO A JUNCTION BOX.

SEE **STEP 1A** FOR DETAILED INSTALLATION AND WIRING INFORMATION.

FIGURE 1

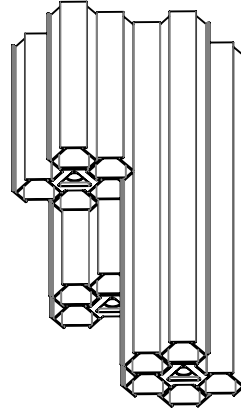**CEILING MOUNTED**

FOR FIXTURE MOUNTED DIRECTLY TO THE CEILING.

SEE **STEP 1B** FOR DETAILED INSTALLATION AND WIRING INFORMATION.

FIGURE 2

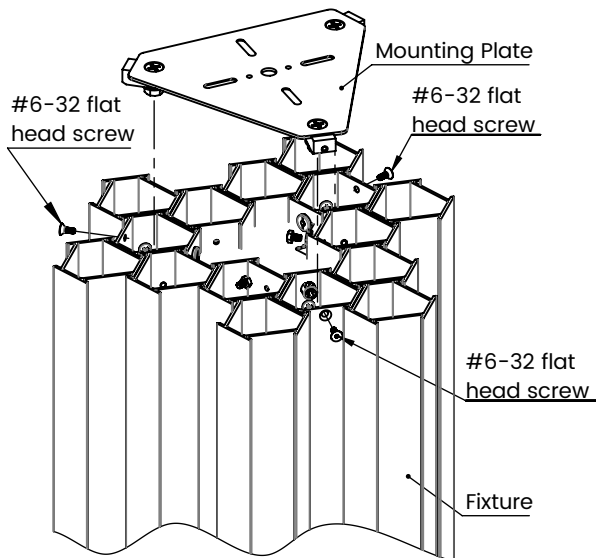
STEP 1A: JUNCTION BOX COVER PLATE INSTALLATION INSTRUCTIONS**1**

FIGURE 3

Remove #6-32 flat head screws from fixture to release mounting plate.




2

FIGURE 4

- A. Pass low voltage wires from junction box through central hole in the mounting plate as shown.
- B. Attach mounting plate to junction box using provided #8-32 flat-head screws.




Connect wires according to diagram (wire nuts provided).
Wires to and from the driver are not included.

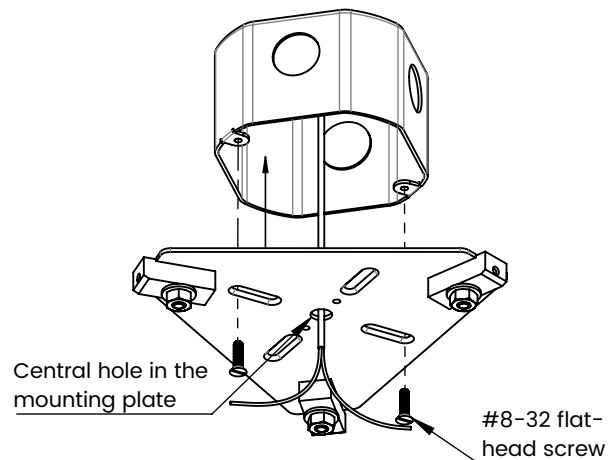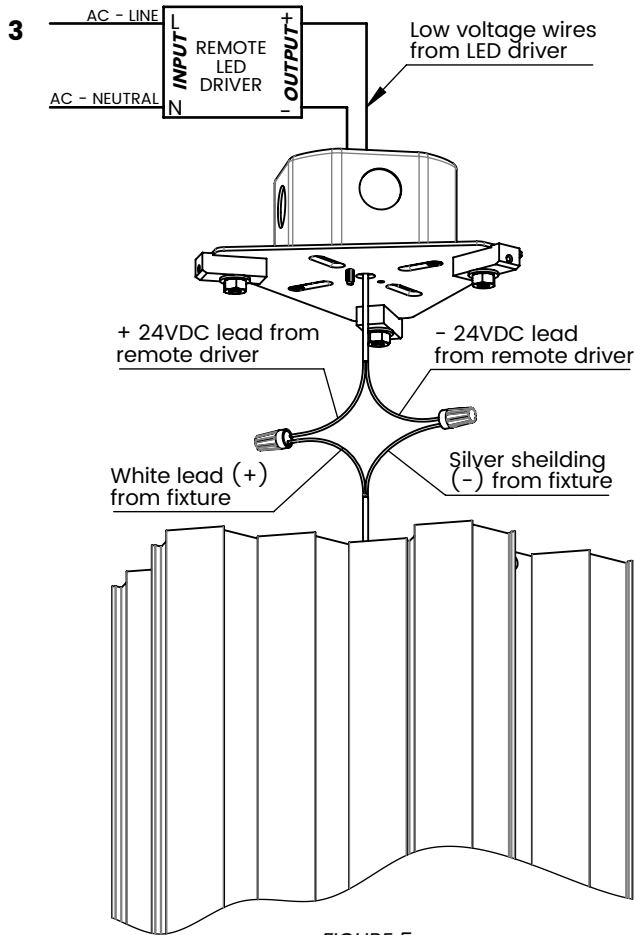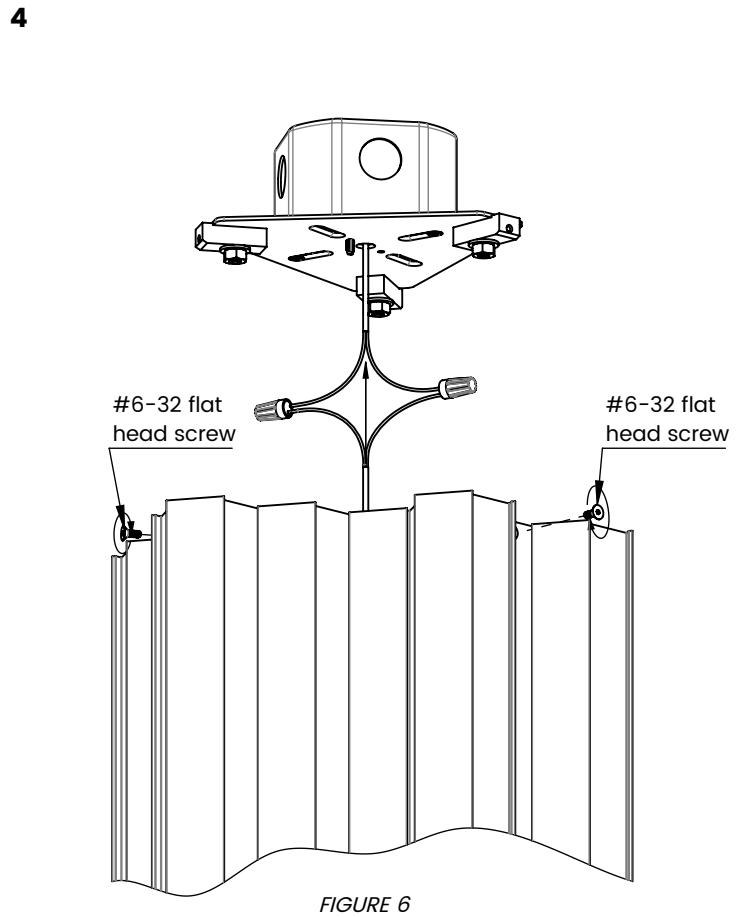


Place wires inside the top of the fixture and use #6-32 flat head screws (removed in first instruction) to connect fixture to mounting plate.

STEP 1B: CEILING MOUNTING INSTALLATION INSTRUCTIONS

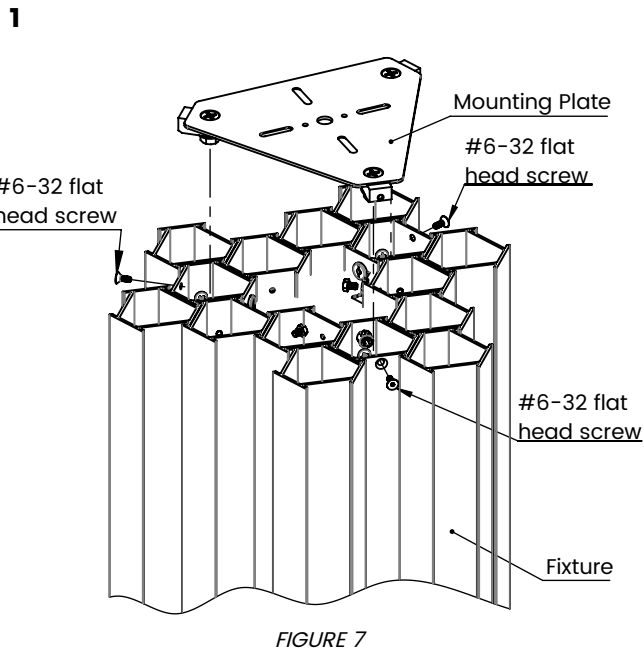

Remove #6-32 flat head screws from fixture to release mounting plate.

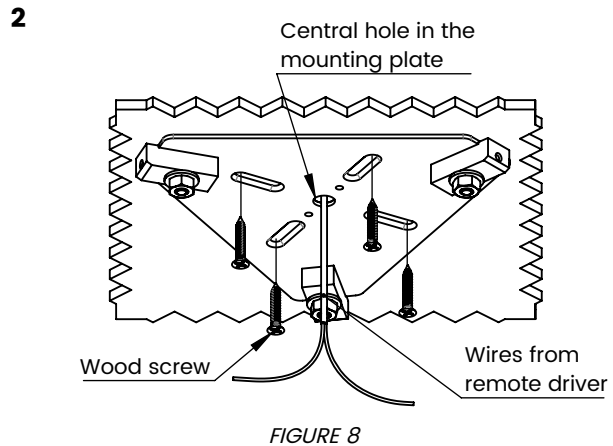

Pass low voltage wires from the remote driver through the central hole in the mounting plate. Using provided wood screws, connect the mounting plate to ceiling. Wood screws are provided for default installation. Alternate screws may be used at the recommendation of an electrician.

Blocking is recommended for drywall mounting.

3

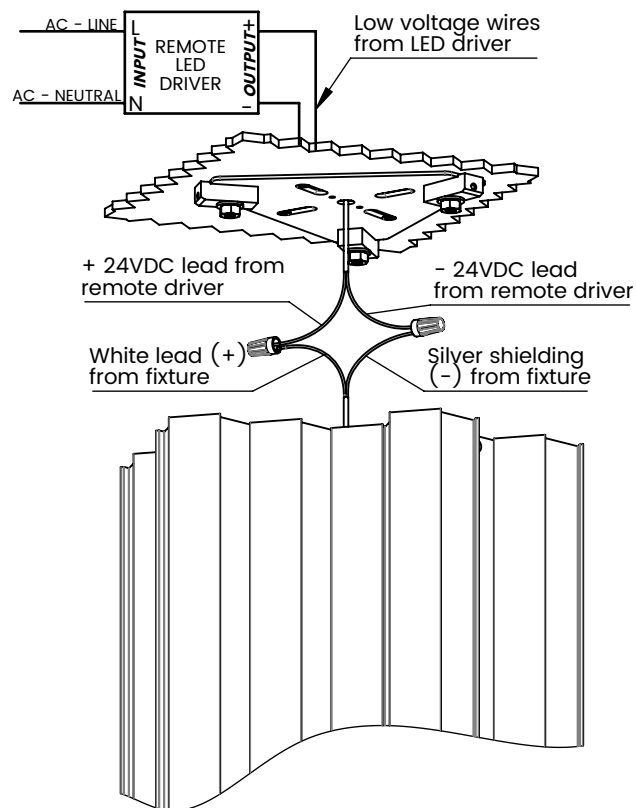


FIGURE 9

Connect wires according to diagram (wire nuts provided).
Wires to and from the driver are not included.

4

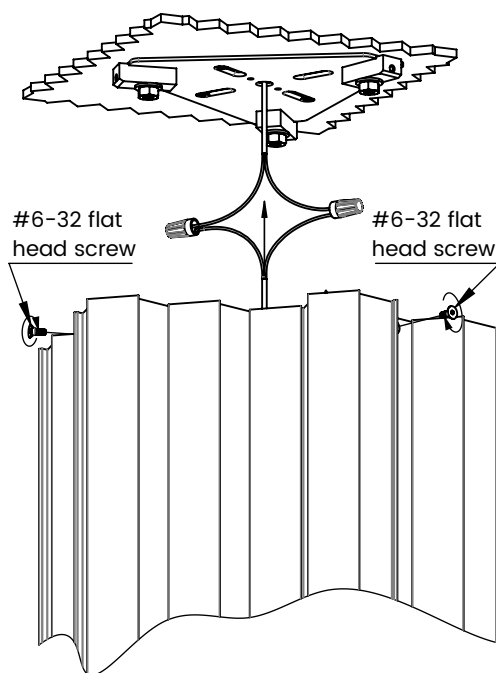


FIGURE 10

Place wires inside the top of the fixture and use #6-32 flat head screws (removed in first instruction) to connect fixture to mounting plate.

CARE INSTRUCTIONS

Gently wipe with a damp cloth to remove dirt, dust, and fingerprints.

Do not use any chemical cleaning solution.

Use indoors only.