

JUNIPER®

07

SYSTEMS BY USE

- PENDANTS
- CEILING FLUSH MOUNT
- SCONCE
- WALL-MOUNT
- CHANDELIER
- TABLETOP
- OUTDOOR

09

LIGHTING PROJECTS

27

THIN SYSTEM

- THIN Task Lamp
- THIN Floor Lamp
- THIN Shared Task Lamp
- THIN Suspension
- THIN Vertical Suspension
- THIN Surface Mount
- THIN Float Sconce
- THIN Multiples
- THIN Primaries
- THIN Solids
- THIN Chandelier

87

MULTIVERSE SYSTEM

99

METROPOLIS SYSTEM

- METROPOLIS Suspension
- METROPOLIS Wall Sconce
- METROPOLIS Wall-To-Wall

109

AXIS SYSTEM

- AXIS T
- AXIS X

117

THE FLUTES SYSTEM

- IONIAN Pendant
- IONIAN Ceiling Mount
- IONIAN Array
- LYDIAN Pendant
- LYDIAN Ceiling Mount
- LYDIAN Sconce
- LYDIAN Array
- DORIAN Pendant
- DORIAN Ceiling Mount
- DORIAN Sconce
- DORIAN Array

147

LOVE ME NOT

149

GROUND CONTROL

- Dimmer Dial
- Dimmer Knob
- Toggle Switch
- Power Outlet
- Double USB
- Double USB-C Port

157

COMPONENTS

- CABLE COLLAR THIN SUSPENSION
- CABLE COLLAR THIN PRIMARIES
- LOCAL CANOPY
- THIN TASK LAMP WALL MOUNT
- THIN TASK LAMP INSET GROMMET
- JUNCTION BOX COVER PLATE

CONTENT INDEX

POWER DISTRUBUTION

UNIVERSE SYSTEM **87**

CHANDELIER

THIN Chandelier **82**

ARRAY

THE FLUTES Ionian Array **123**

THE FLUTES Lydian Array **131**

PENDANTS

THIN Suspension **36**

THIN Vertical Suspension **36**

THIN Multiples Dyad **43**

THIN Mutliples Triad **44**

THIN Multiples Tetrad **47**

THIN Primaries Suspended Triangle **63**

THIN Primaries Suspended Square **64**

THIN Primaries Suspended Rhombus **67**

THIN Primaries Suspended Rectangle **68**

THIN Primaries Suspended Hexagon **71**

THIN Primaries Suspended Octagon **72**

THIN Solids Cube **77**

THIN Solids Tetrahedron **78**

THIN Solids Diamond **81**

METROPOLIS Suspension **101**

AXIS T **111**

AXIS X **112**

THE FLUTES Ionian Pendant **119**

THE FLUTES Lydian Pendant **124**

THE FLUTES Dorian Pendant **132**

LOVE ME NOT **147**

SCONCE

THIN Single Float **38**

THIN Retro Float **38**

METROPOLIS Wall Sconce **102**

AXIS Wall Sconce **112**

THE FLUTES Lydian Sconce **128**

THE FLUTES Dorian Sconce **136**

TABLETOP

THIN Task Lamp **28**

TABLE MOUNT

THIN Shared Task Lamp **31**

GROUND CONTROL Dimmer Dial **152**

GROUND CONTROL Dimmer Knob **15**

GROUND CONTROL Toggle Switch **15**

GROUND CONTROL Power Outlet **152**

GROUND CONTROL Double USB **152**

GROUND CONTROL Double USB-C Port **152**

WALL-MOUNT

THIN Surface Mount **37**

THIN Primaries Surface Mount Triangle **51**

THIN Primaries Surface Mount Square **52**

THIN Primaries Surface Mount Rhombus **56**

THIN Primaries Surface Mount Rectangle **56**

THIN Primaries Surface Mount Hexagon **59**

THIN Primaries Surface Mount Octagon **61**

METROPOLIS Wall-to-Wall **106**

CEILING FLUSH MOUNT

THE FLUTES Ionian Ceiling Mount **121**

THE FLUTES Lydian Ceiling Mount **128**

THE FLUTES Dorian Ceiling Mount **136**

THE FLUTES Dorian Array **139**

SYSTEMS
BY USE

LIGHTING
PROJECTS

Remedy Place
Photo by Madeline Tolle

Assemblage
Photo by Mikiko Kikuyama

Juniper Showroom
Photo by Juniper

Barclay’s Diamond Lounge
Photo by Tom Sibley

Mission Victorian
Photo by Brad Knipstein

VanBarton
Photo by Juniper

Alternative Tech Client
Photo by Garrett Rowland

YODEZEEN
Photo by YODEZEEN



a. thin task lamp with wall mount,
standard size, black oxide, x3



a.

a. metropolis wall-to-wall, 26" modules,
satin brass, suspension mount



a.

a. axis x, 36",
polished brass, direct-mount




b.

b. axis t wall sconce, 36",
polished brass, direct-mount




a.

a. thin surface mount, 36" segments, x6, 3.5" stand-offs,
satin brass, direct-mount

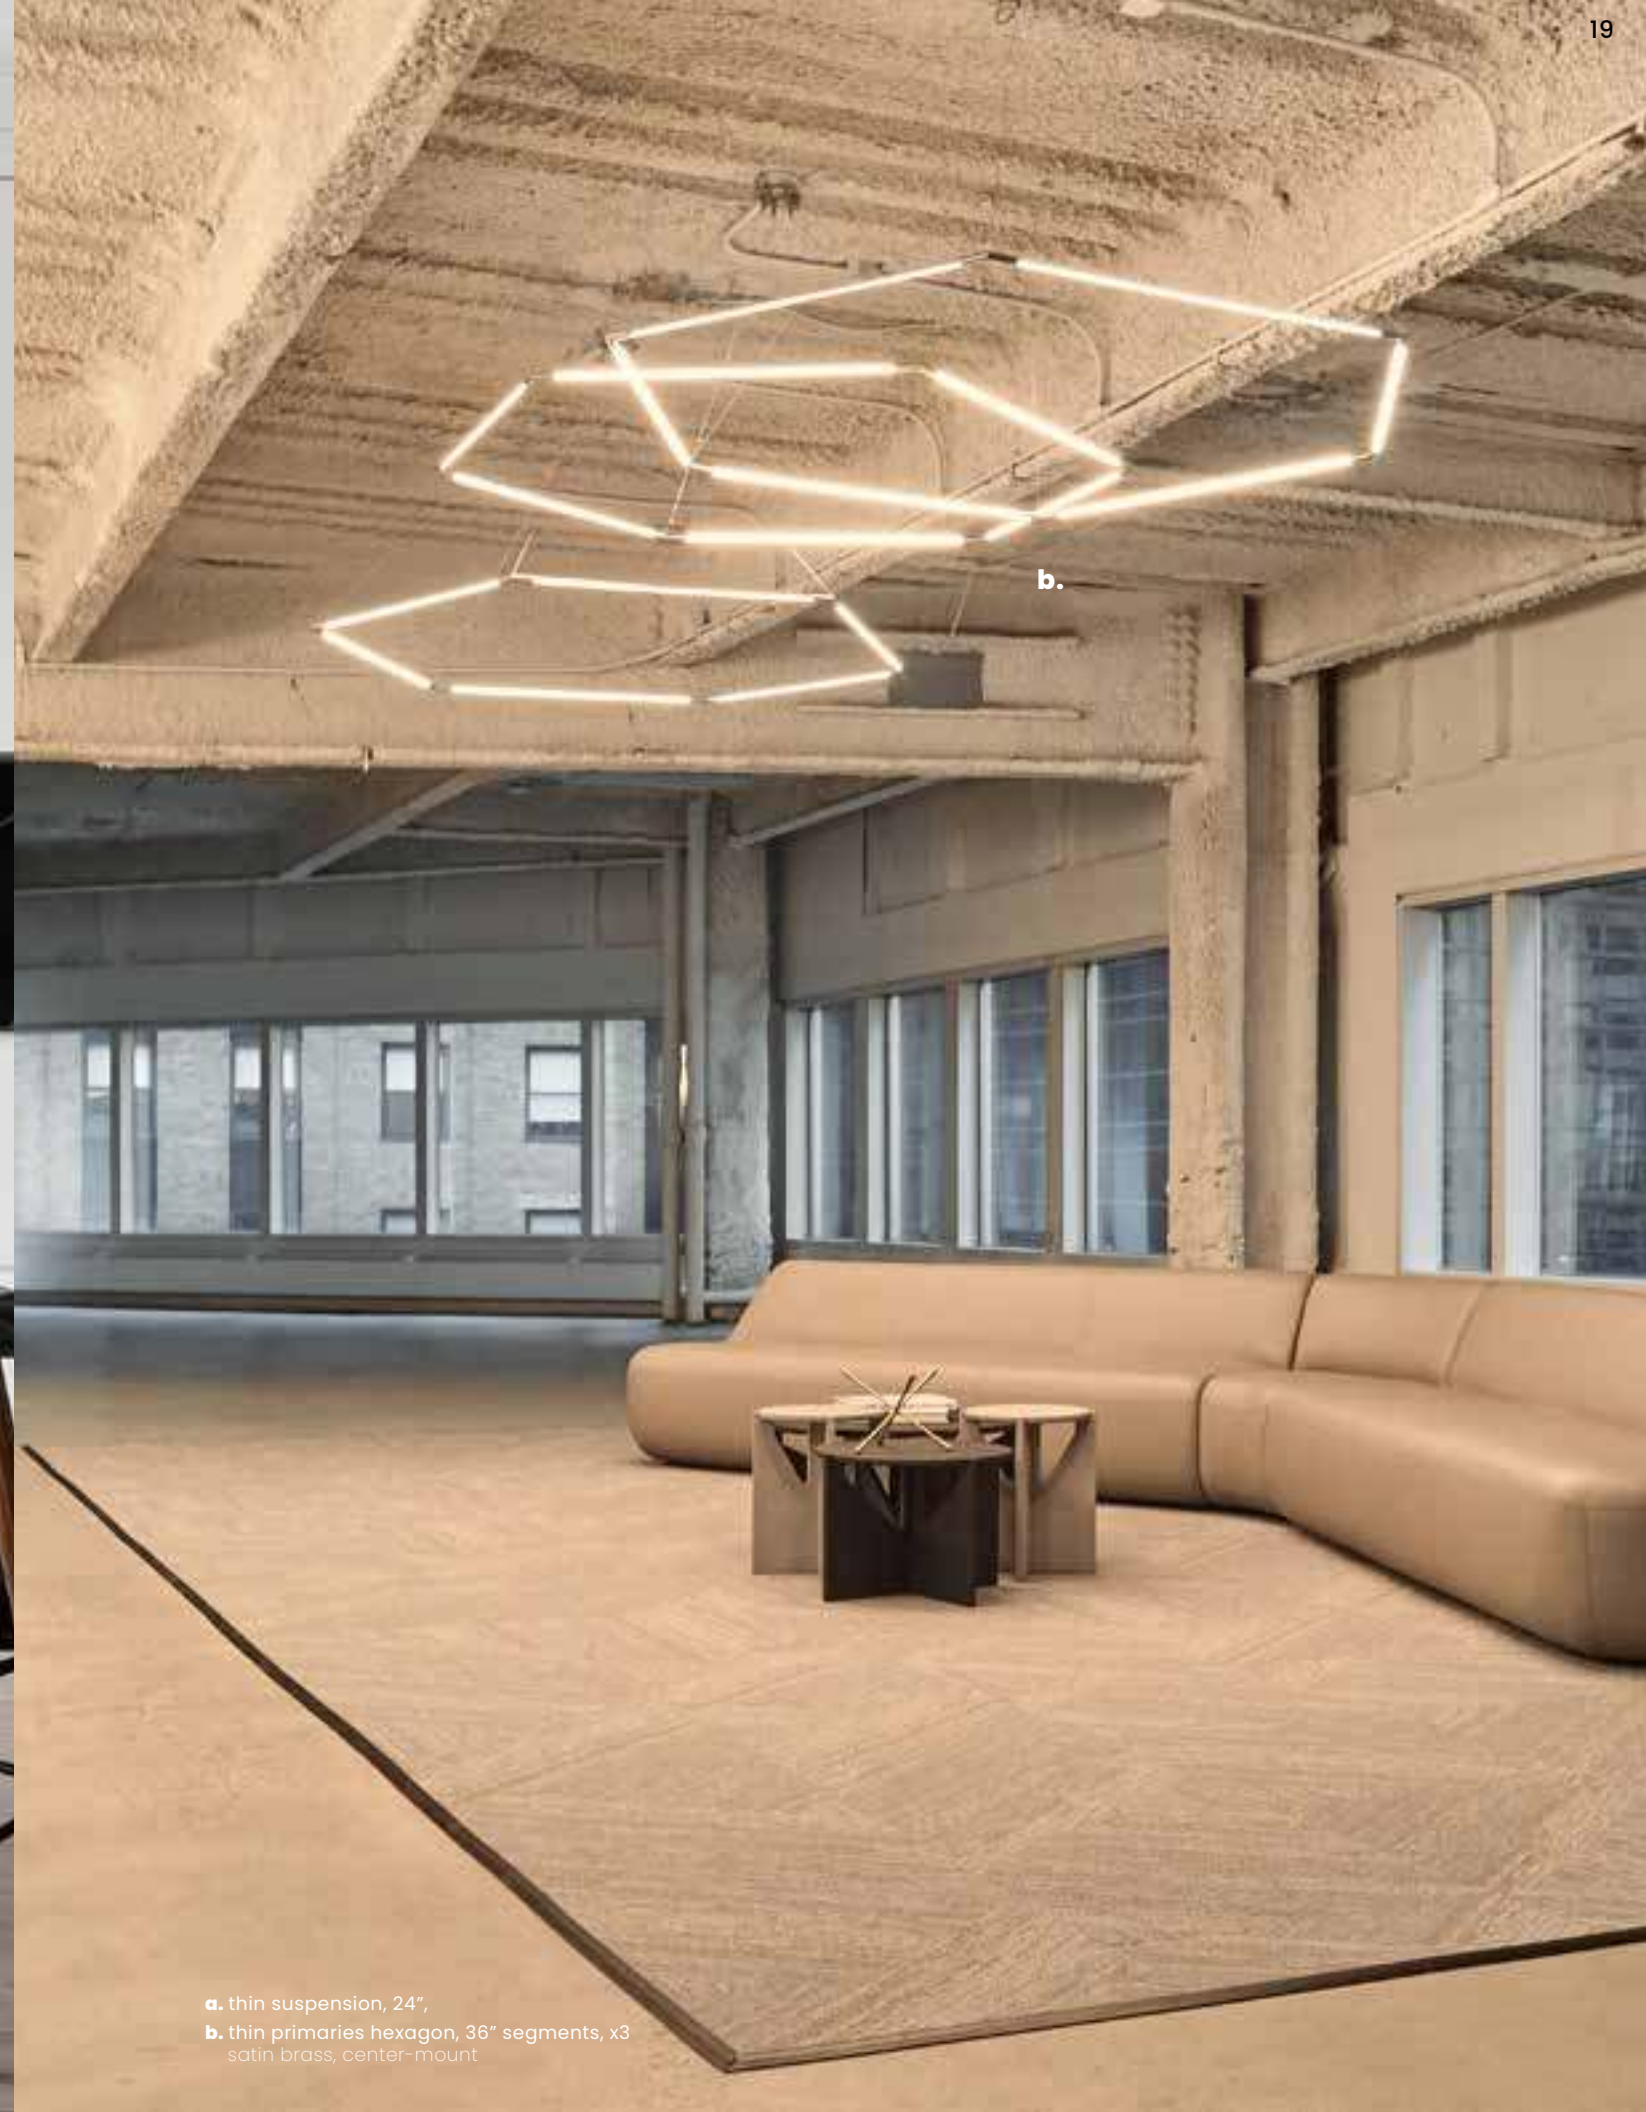

a. thin suspension, 24",
b. thin primaries hexagon, 36" segments, x3
satin brass, center-mount

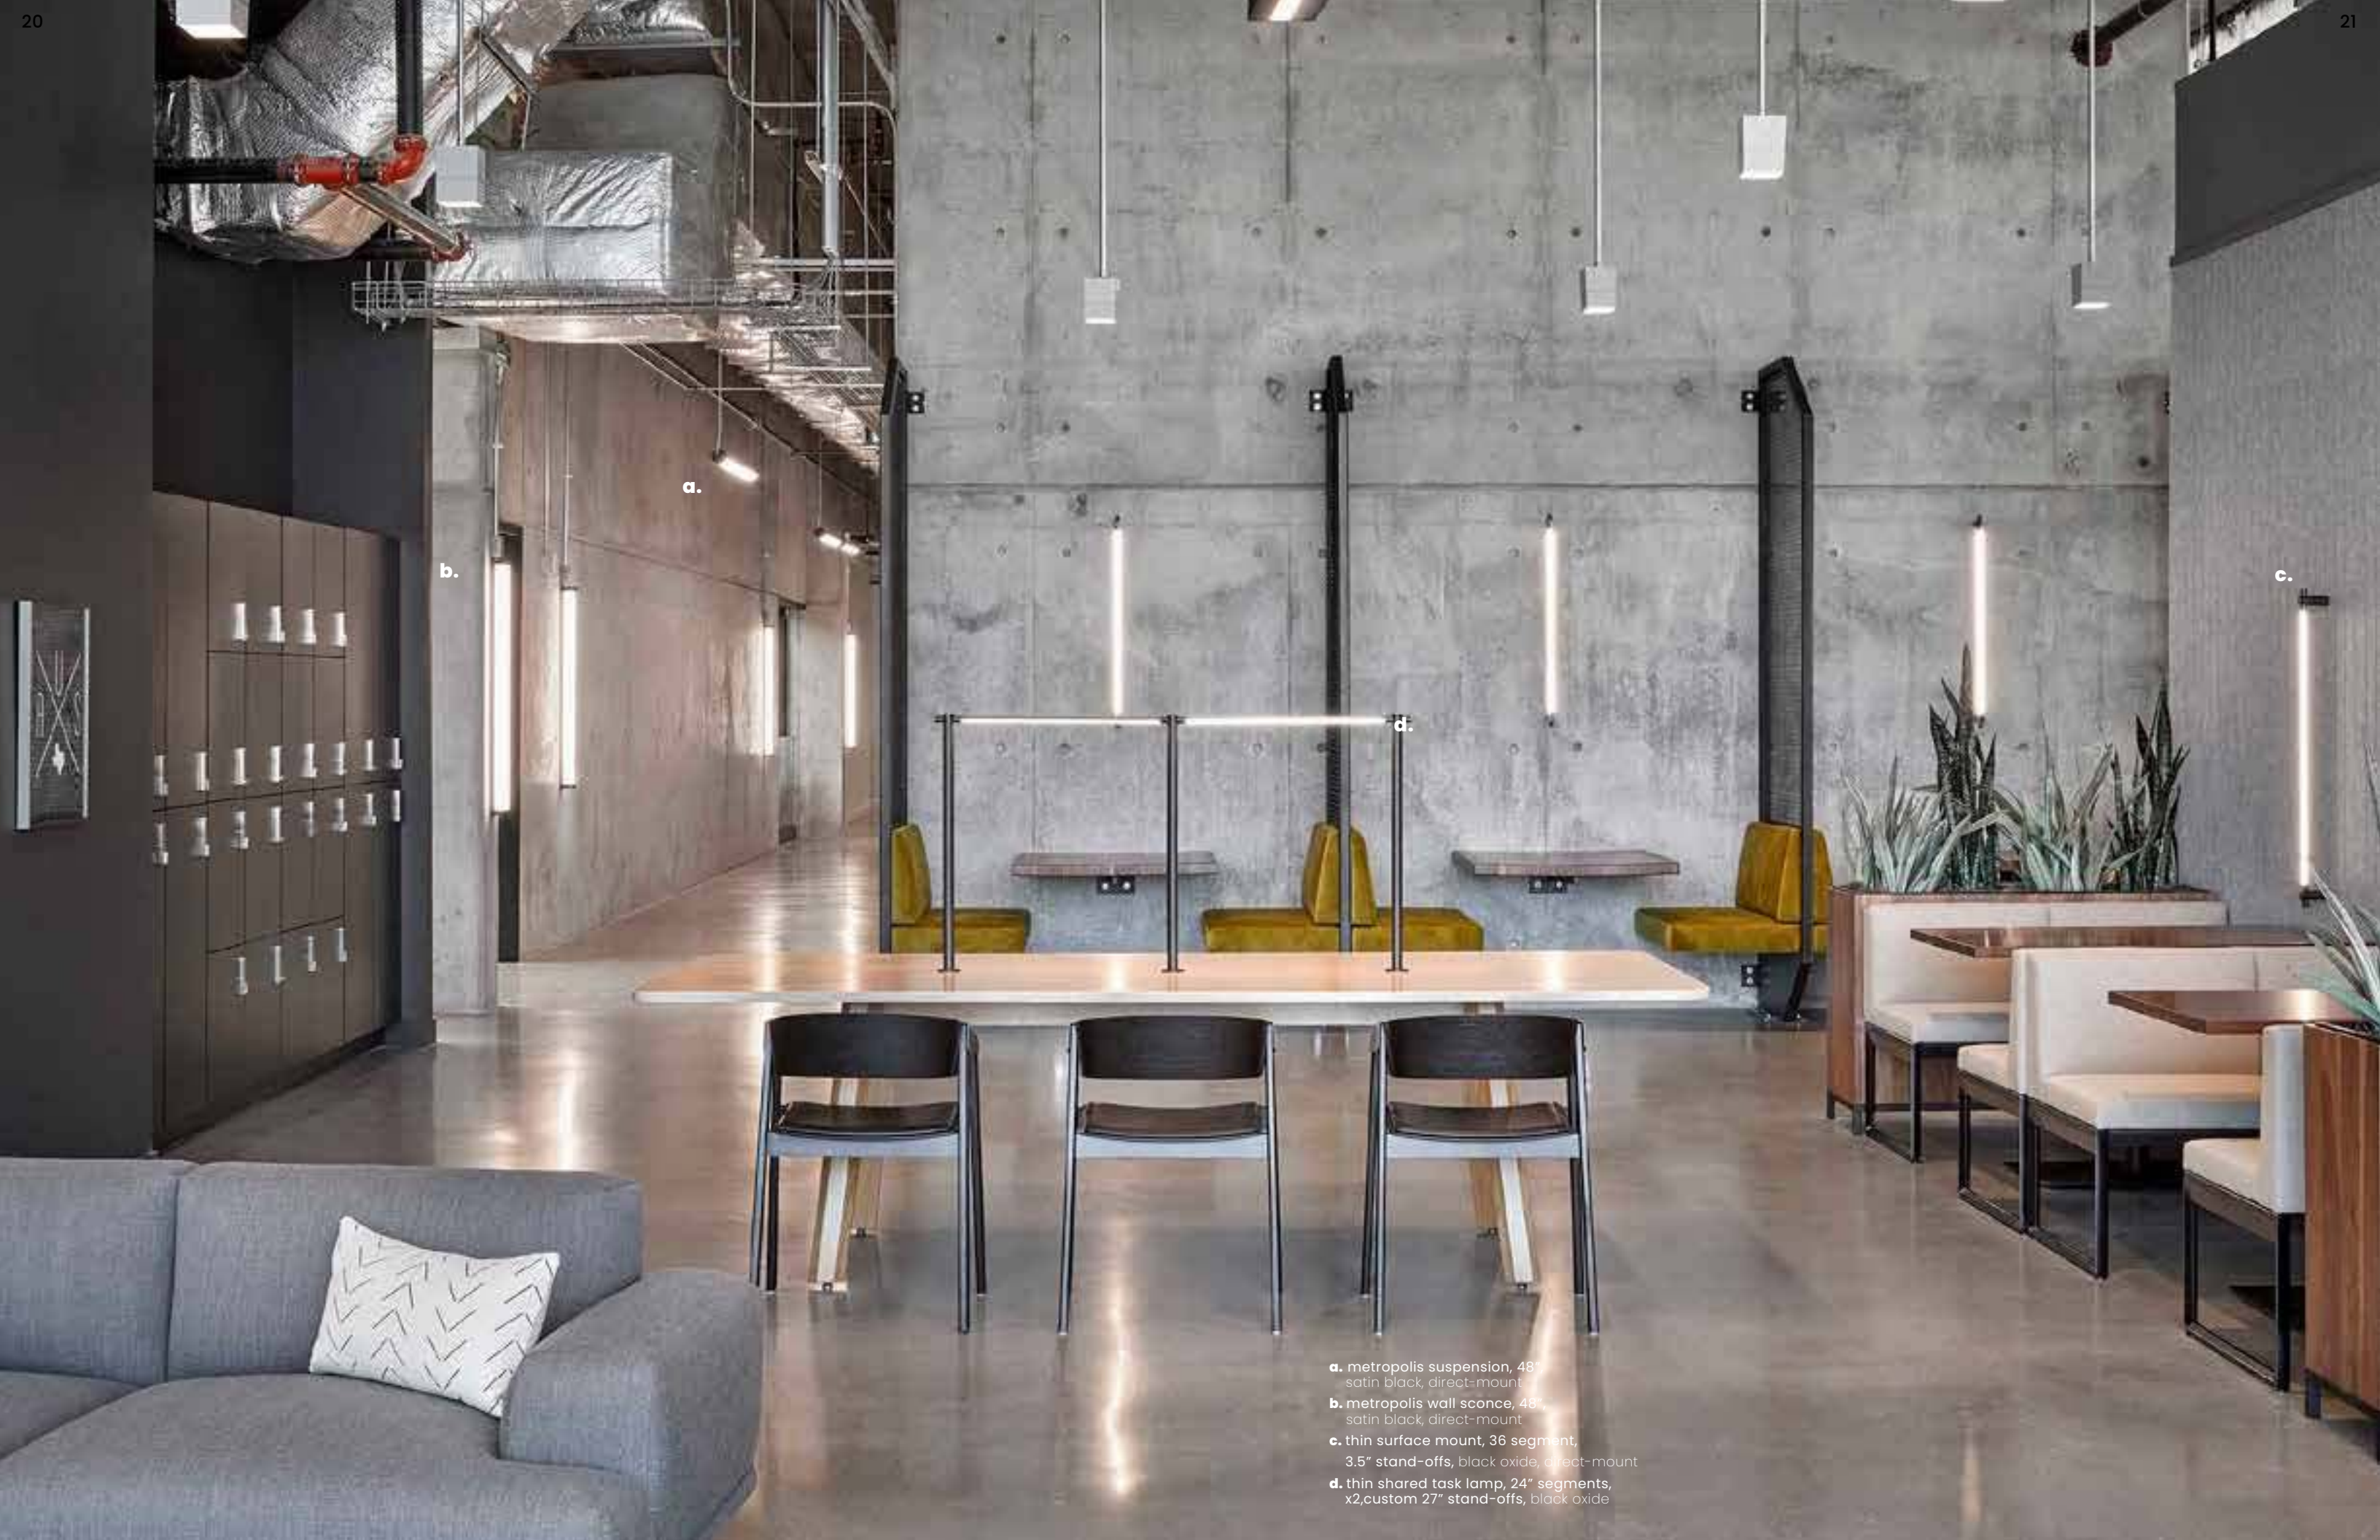

- a.** metropolis suspension, 48"
satin black, direct-mount
- b.** metropolis wall sconce, 48"
satin black, direct-mount
- c.** thin surface mount, 36 segment,
3.5" stand-offs, black oxide, direct-mount
- d.** thin shared task lamp, 24" segments,
x2, custom 27" stand-offs, black oxide








a.

a. thin multiples dyad, 24" segment
satin brass, direct-mount.


**LIGHTING
SYSTEMS**

THIN SYSTEM
UNIVERSE
METROPOLIS
AXIS
THE FLUTES
LOVE ME NOT

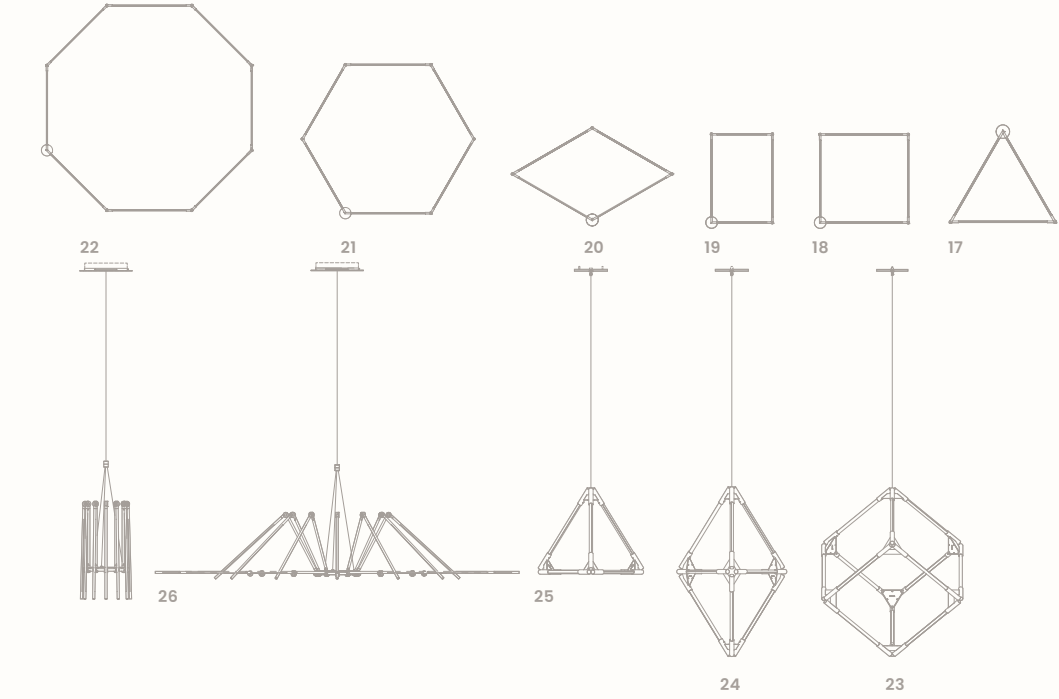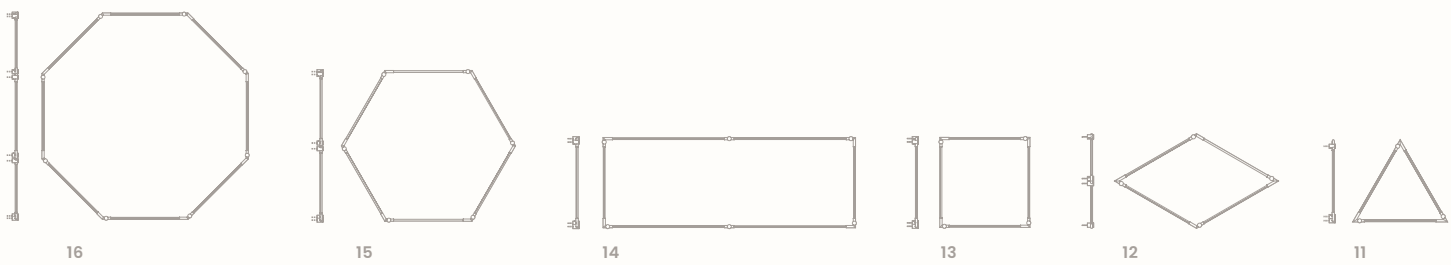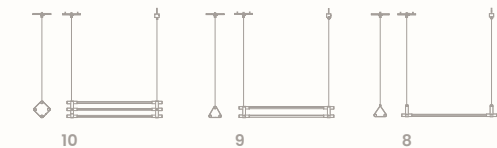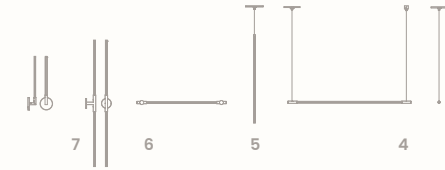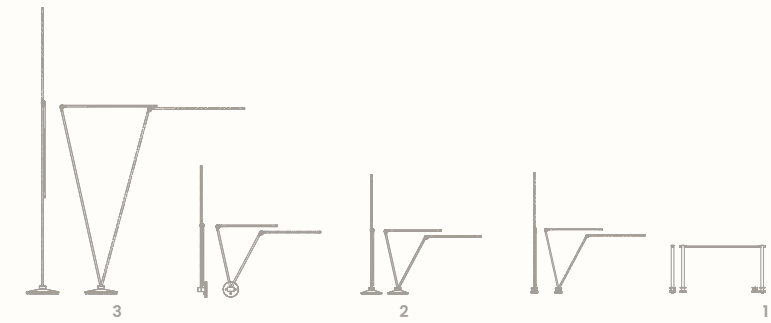

THIN SYSTEM

THIN SHARED TASK LAMP	1
THIN TASK LAMPS	2
THIN FLOOR LAMP	3
THIN SUSPENSION	4
THIN VERTICAL SUSPENSION	5
THIN SURFACE MOUNT	6
THIN FLOAT SCONCES	7
THIN MULTIPLES DYAD	8
THIN MULTIPLES TRIAD	9
THIN MULTIPLES TETRAD	10
THIN PRIMARIES SURFACE MOUNT TRIANGLE	11
THIN PRIMARIES SURFACE MOUNT RHOMBUS	12
THIN PRIMARIES SURFACE MOUNT SQUARE	13
THIN PRIMARIES SURFACE MOUNT RECTANGLE	14
THIN PRIMARIES SURFACE MOUNT HEXAGON	15
THIN PRIMARIES SURFACE MOUNT OCTAGON	16
THIN PRIMARIES SUSPENDED TRIANGLE	17
THIN PRIMARIES SUSPENDED SQUARE	18
THIN PRIMARIES SUSPENDED RECTANGLE	19
THIN PRIMARIES SUSPENDED RHOMBUS	20
THIN PRIMARIES SUSPENDED HEXAGON	21
THIN PRIMARIES SUSPENDED OCTAGON	22
THIN SOLIDS CUBE	23
THIN SOLIDS TETRAHEDRON	24
THIN SOLIDS DIAMOND	25
THIN CHANDELIER	26

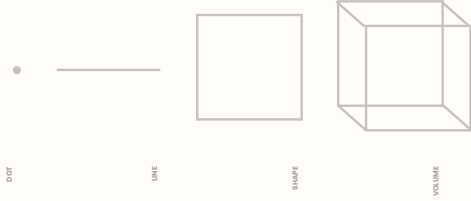

THIN
TASK LAMP
FLOOR LAMP



DIMENSIONS
Standard – 40 In Extended
Tall – 50 In Extended

WATTAGE & LUMENS
Standard – 6W, 0–600LM
Tall – 7W, 0–850LM
Floor – 7W, 0–730LM

LIGHT TEMPERATURE
3000K


LIGHT QUALITY
90CRI

MATERIALS
Brass, Cast Iron, Clear PMMA

FINISHES
Satin Brass, Black Oxide, Satin Nickel

CERTIFICATIONS
cUL, UL, CE

MOUNTING
Cast Iron Base, Wall-Mount, Desk-Inset

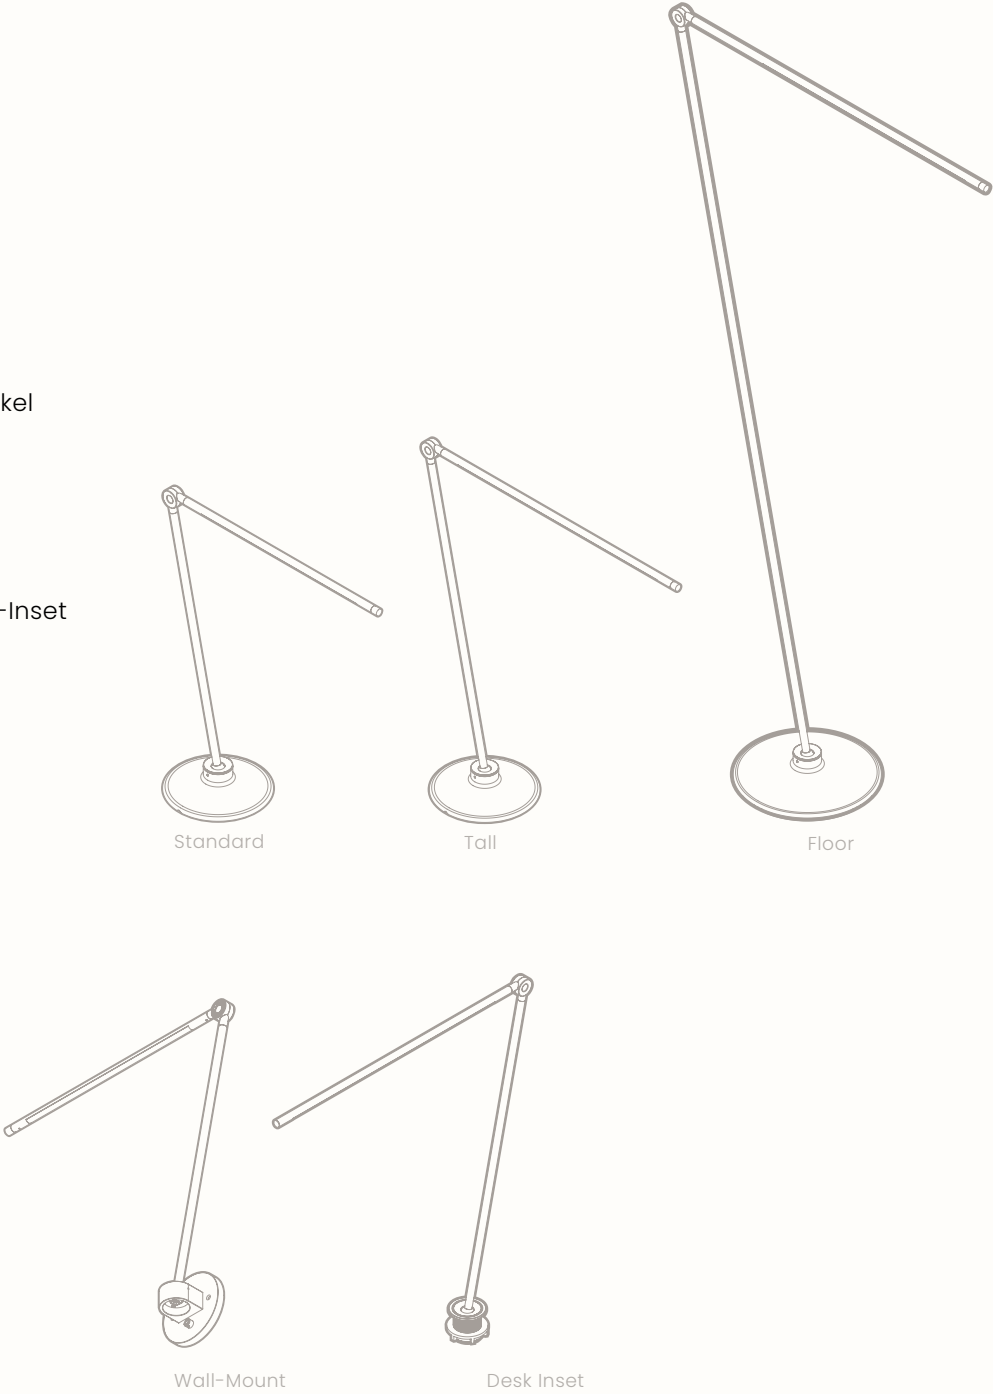

thin task lamp
thin floor lamp
satin brass

DIMENSIONS
24 In or 36 In segments
19 In tall

EXTENDABLE LENGTHS
Up to 9Ft, 3 connected segments

WATTAGE & LUMENS
24 In - 6.8W, 0-600LM per segment
36 In - 9.6W, 0-920LM per segment

LIGHT TEMPERATURE
2700K, 3000K, 3500K, 4000K

LIGHT QUALITY
95+ CRI, R9 90+

MATERIALS
Solid Brass, PMMA

FINISHES
Satin Brass, Black Oxide, Satin Nickel


POWER ACCESSORIES
Ground Control Toggle Switch,
Dimmer Knob, Dimmer Dial,
Double Usb Port & Power Outlet

CERTIFICATIONS
CE, cUL, UL, Title 24, DAMP Rated

MOUNTING
Table-Top Mounted



thin shared task lamp, 36" segments, x2,
satin brass

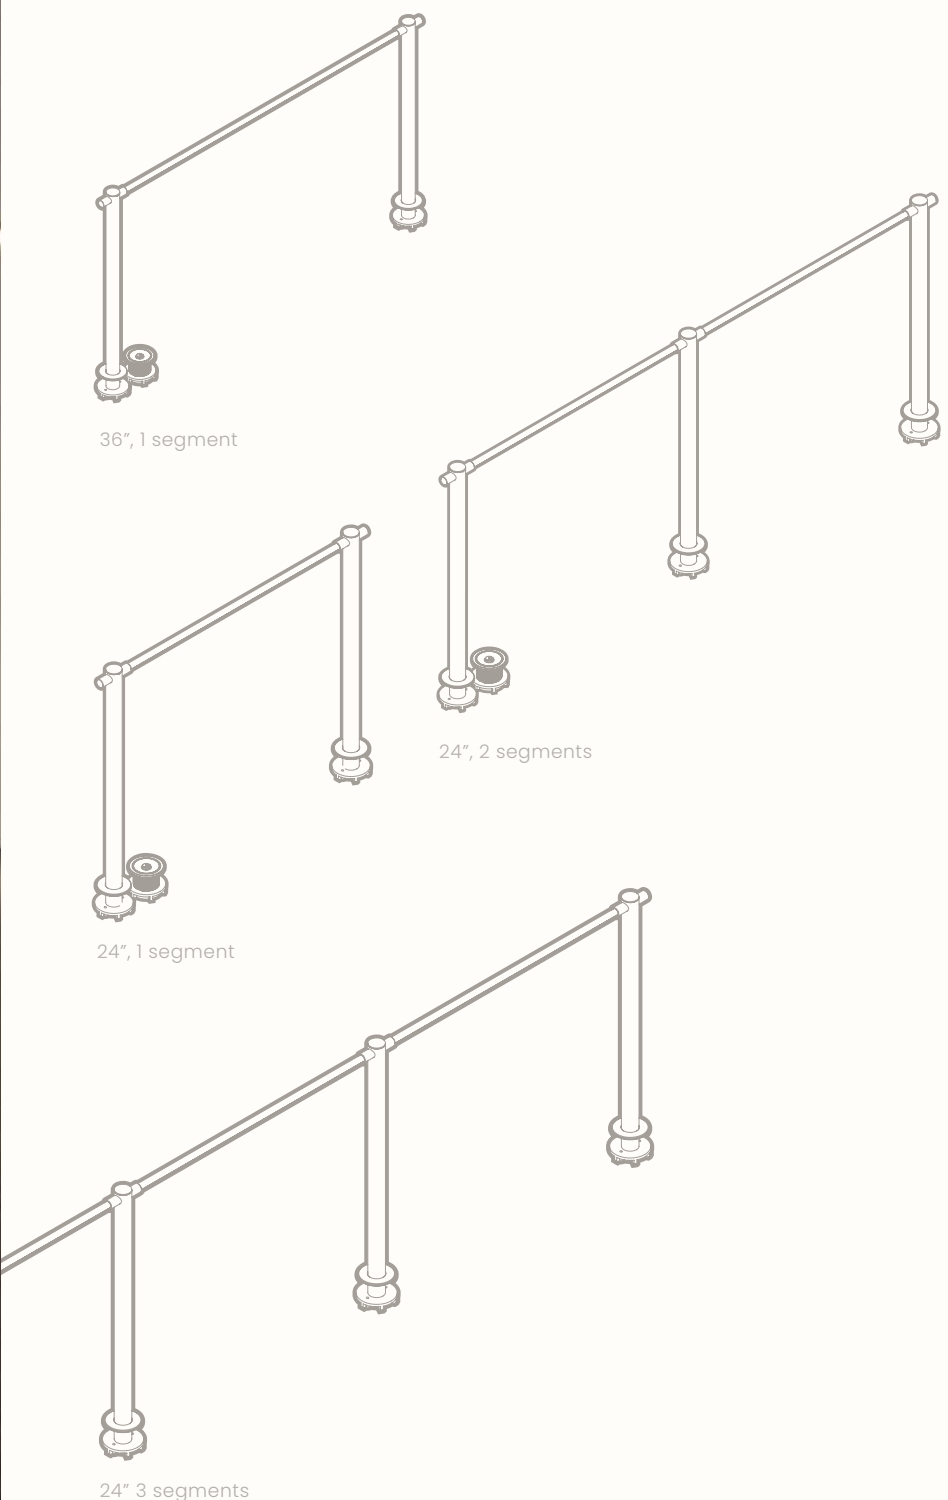



a.



b.

a. thin task lamp,
desk inset detail
b. thin task lamp,
hinge detail

THIN SUSPENSION VERTICAL SUSPENSION

UL cUL CE FC ΔDAMP RATED

DIMENSIONS - SUSPENSION

24 In or 36 In segment lengths

DIMENSIONS - VERTICAL SUSPENSION

24 In, 36 In or 48 In segment lengths.

Diverse segments combinations per clusters available upon request

EXTENDABLE LENGTHS

Up to 27 Ft total on 96W Driver

Longer lengths available

WATTAGE & LUMENS - SUSPENSION

24 In - 6.8W, 0-600LM per segment

36 In - 9.6W, 0-920LM per segment

WATTAGE & LUMENS - VERTICAL SUSPENSION

24 In - 6.8W, 0-600 LM per segment

36 In - 9.6 W, 0-920 LM per segment

48 In - 13.6W, 0-1227 LM per segment

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

95+ CRI, R9 90+

MATERIALS

Solid Brass, PMMA

FINISHES


Satin Brass, Black Oxide, Satin Nickel

CERTIFICATIONS


CE, cUL, UL, Title 24, DAMP Rated

MOUNTING


Direct-Mount To Ceiling, Center Power Feed, Center-Mount With Cable Collar,




36" direct-mount to ceiling




24" x2, center-mount to ceiling



24" x2, center-mount with cable collar

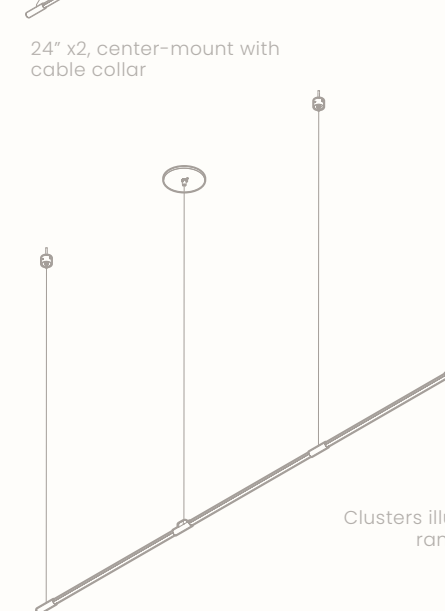


24" x3, center power feed

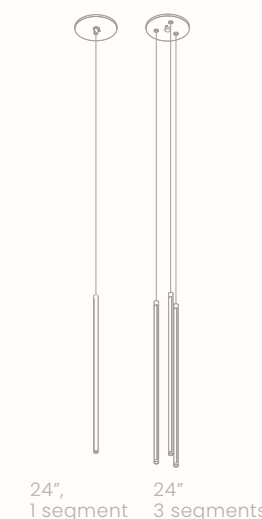

24",
1 segment

24"
3 segments

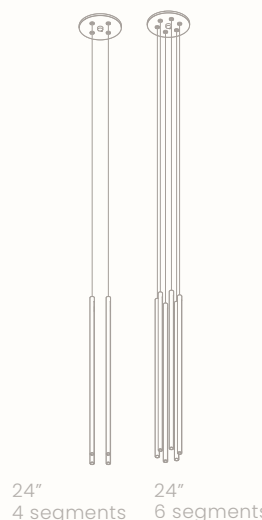

24"
4 segments

24"
6 segments

Clusters illustrated with same length segments, ranging lengths available upon request.

thin vertical suspension, 36",
1 segment, black oxide

thin suspension, 24",
satin brass, direct-mount



thin surface mount, 24" segments, x3,
7" stand-offs, satin brass

DIMENSIONS
24 In or 36 In segment lengths

STAND OFF HEIGHTS
1.75 In (45MM), 3.5 In (90MM), 7 In (180MM)

EXTENDABLE LENGTHS
Up to 27 Ft total on 96W Driver

WATTAGE & LUMENS
24 In - 6.8W, 0-600LM per segment
36 In - 9.6W, 0-920LM per segment

LIGHT TEMPERATURE
2700K, 3000K, 3500K, 4000K

LIGHT QUALITY
95+ CRI, R9 90+

MATERIALS
Solid Brass, PMMA


FINISHES
Satin Brass, Black Oxide, Satin Nickel

CERTIFICATIONS
CE, cUL, UL, Title 24, DAMP Rated


MOUNTING
Direct-Mount To Surface




24", 1.75" stand offs

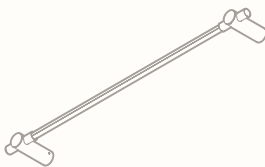


24", 3.5" stand offs

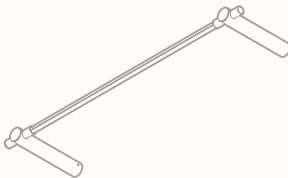

24", 7" stand offs

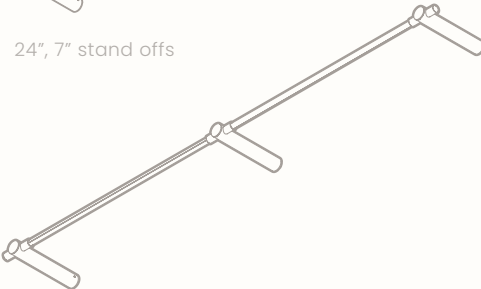

24" x2, 7" stand offs

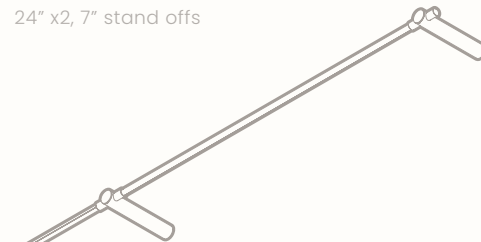

24" x3, 7" stand offs

Other stand off and segment length combinations
available upon request.

THIN FLOAT

SINGLE FLOAT SCONCE

RETRO FLOAT SCONCE

UL cUL CE FCC DAMP RATED

DIMENSIONS - SINGLE FLOAT

12 In, 18 In or 24 In Segment Lengths

DIMENSIONS - RETRO FLOAT

24 In or 36 In segment lengths

WATTAGE & LUMENS - SINGLE FLOAT

18 In - 5.1W, 0-450LM

24 In - 6.8W, 0-600LM

WATTAGE & LUMENS - RETRO FLOAT

24 In - 6.8W, 0-600LM

36 In - 9.6W, 0-920LM

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

95+ CRI, R9 90+

MATERIALS

Solid brass, PMMA

FINISHES


Satin Brass, Satin Nickel, Black Oxide

CERTIFICATIONS


CE, cUL, UL, TITLE 24, DAMP Rated

MOUNTING

Direct-Mount To Surface

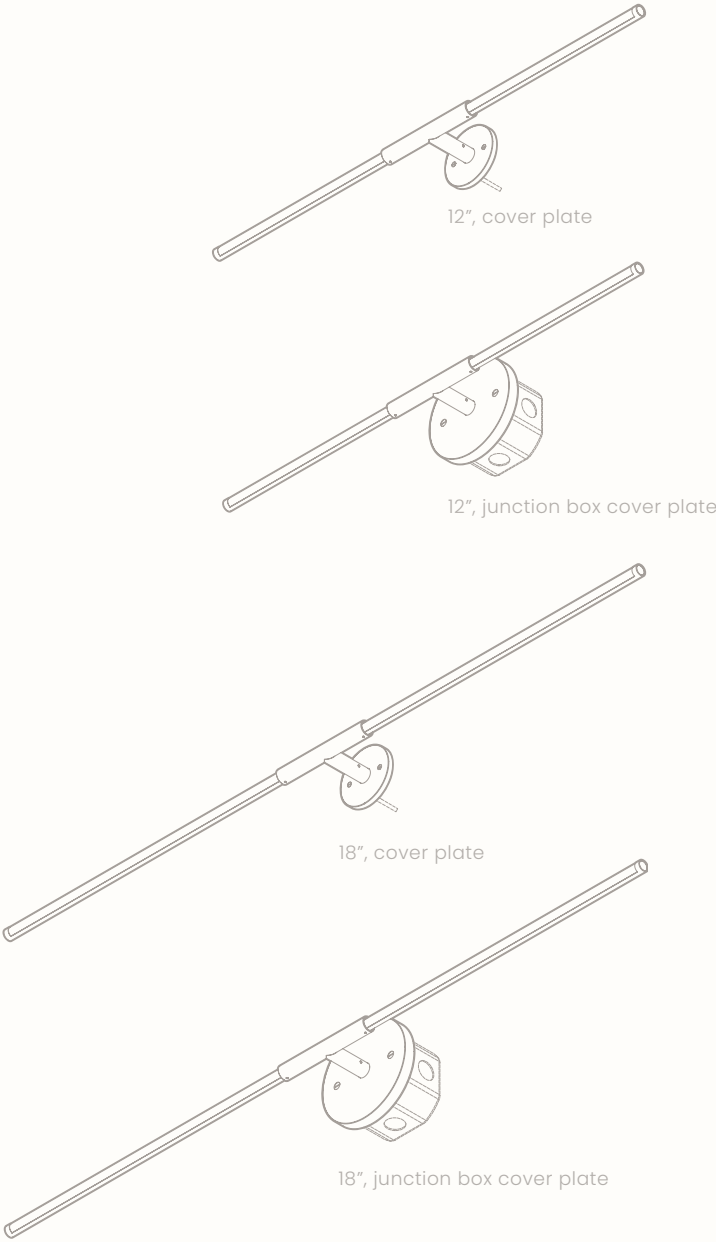

fixture can be installed vercally or horizontally.

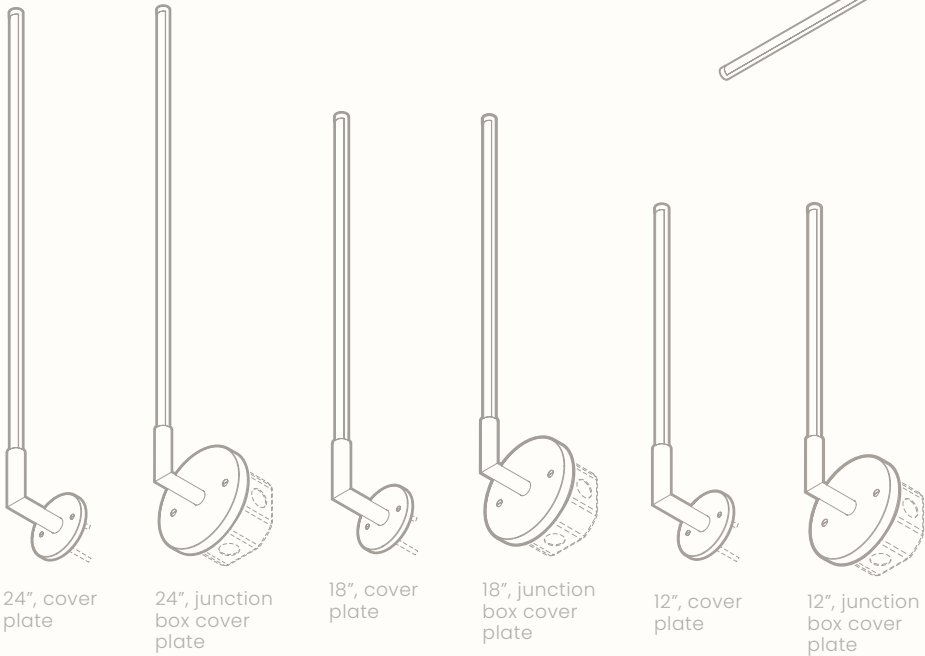

thin single float sconce, 24",
black oxide, cover plate

thin retro float sconce, 18",
black oxide, cover plate



7" stand-off

3.5" stand-off

1.75" stand-off



a.

b.

a. thin vertical suspension,
24" and 36" segments, x3, satin brass, direct-mount
b. thin suspension, 36" segments, x2,
satin brass, direct-mount

THIN MULTIPLES

UL cUL CE FC DAMP RATED DYAD

DIMENSIONS

24 In or 36 In segment lengths

STYLE OPTIONS

Horizontal or Vertical

EXTENDABLE LENGTHS

Up to 12 Ft total on 96W Driver, Longer Lengths Available

WATTAGE & LUMENS

24 In - 13.6W, 0-1200LM Per Section

36 In - 19.2W, 0-1840LM Per Section

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

95+ CRI, R9 90+

MATERIALS

Solid Brass, PMMA

FINISHES


Satin Brass, Black Oxide, Satin Nickel

CERTIFICATIONS


CE, cUL, UL, Title 24, DAMP Rated

MOUNTING


Direct-Mount To Ceiling, Center-Mount With Cable Collar, Center-Mount Without Cable Collar, Mini Mount




Dyad Horizontal, 24",
direct-mount to ceiling




Dyad Horizontal, 24",
center-mount to ceiling




Dyad Vertical, 24",
direct-mount to ceiling

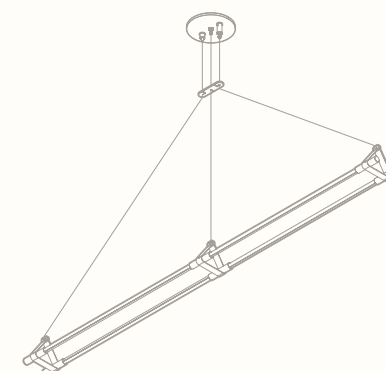

Dyad Horizontal, 24" x2,
center-mount with cable collar

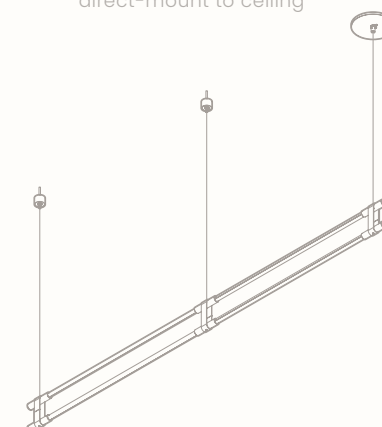

Dyad Vertical, 24" x2,
direct-mount

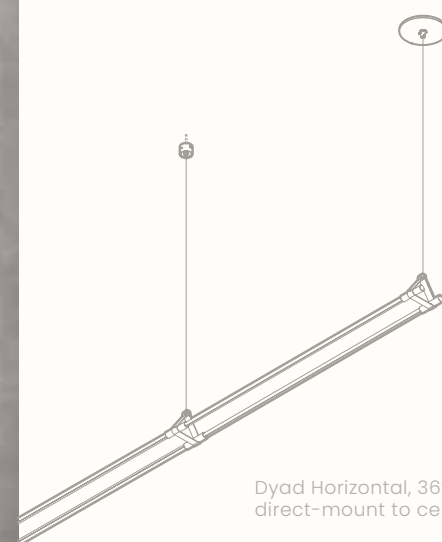

Dyad Horizontal, 36" x2,
direct-mount to ceiling



a.

b.

a. thin dyad horizontal, 36",
black oxide, direct-mount

b. thin dyad vertical, 36",
satin nickel, direct-mount



44

THIN MULTIPLES TRIAD

DIMENSIONS
24 In or 36 In segment lengths

EXTENDABLE LENGTHS
Up to 8 Ft total On 96W Driver, Longer Lengths Available

WATTAGE & LUMENS
24 In - 20.4W, 0-1800LM Per Section
36 In - 28.8W, 0-2760LM Per Section

LIGHT TEMPERATURE
2700K, 3000K, 3500K, 4000K




LIGHT QUALITY
95+ CRI, R9 90+

MATERIALS
Solid Brass, PMMA

FINISHES
Satin Brass, Black Oxide, Satin Nickel

CERTIFICATIONS
CE, cUL, UL Title 24, DAMP Rated

MOUNTING
Direct-Mount To Ceiling, Center-Mount With Cable Collar, Center-Mount Without Cable Collar, Mini Mount

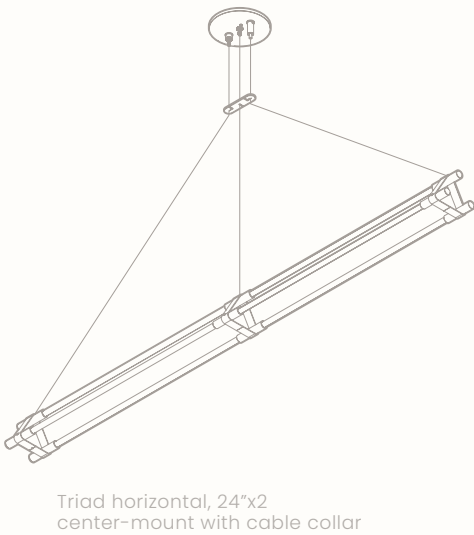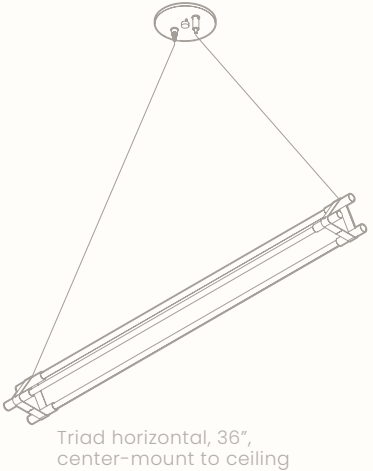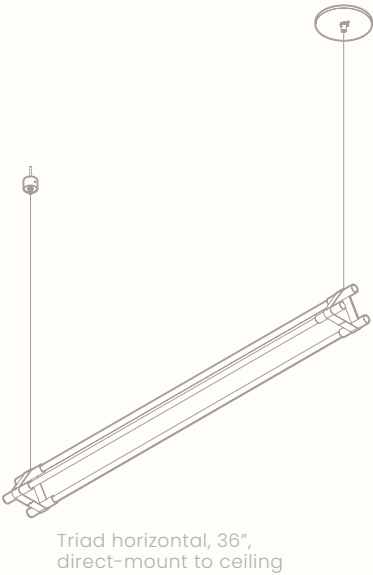

a. thin triad horizontal, 36",
black oxide, direct-mount

b. thin triad vertical, 36",
black oxidel, direct-mount



THIN MULTIPLES






TETRAD

DIMENSIONS

24 In or 36 In options

EXTENDABLE LENGTHS

Up to 6 Ft total on 96W Driver, Longer Lengths Available

WATTAGE & LUMENS

24 In - 27.2W, 0-2400LM Per Section

36 In - 38.4W, 0-3680LM Per Section

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

95+ CRI, R9 90+

MATERIALS

Solid Brass, PMMA

FINISHES

Satin Brass, Black Oxide, Satin Nickel

CERTIFICATIONS

CE, cUL, UL Title 24, DAMP Rated


MOUNTING

Direct-Mount To Ceiling, Center-Mount With Cable Collar, Center-Mount Without Cable Collar, Mini Mount



a. thin tetrad horizontal, 36",
satin nickel, direct-mount

b. thin tetrad vertical, 36",
satin brass, direct-mount

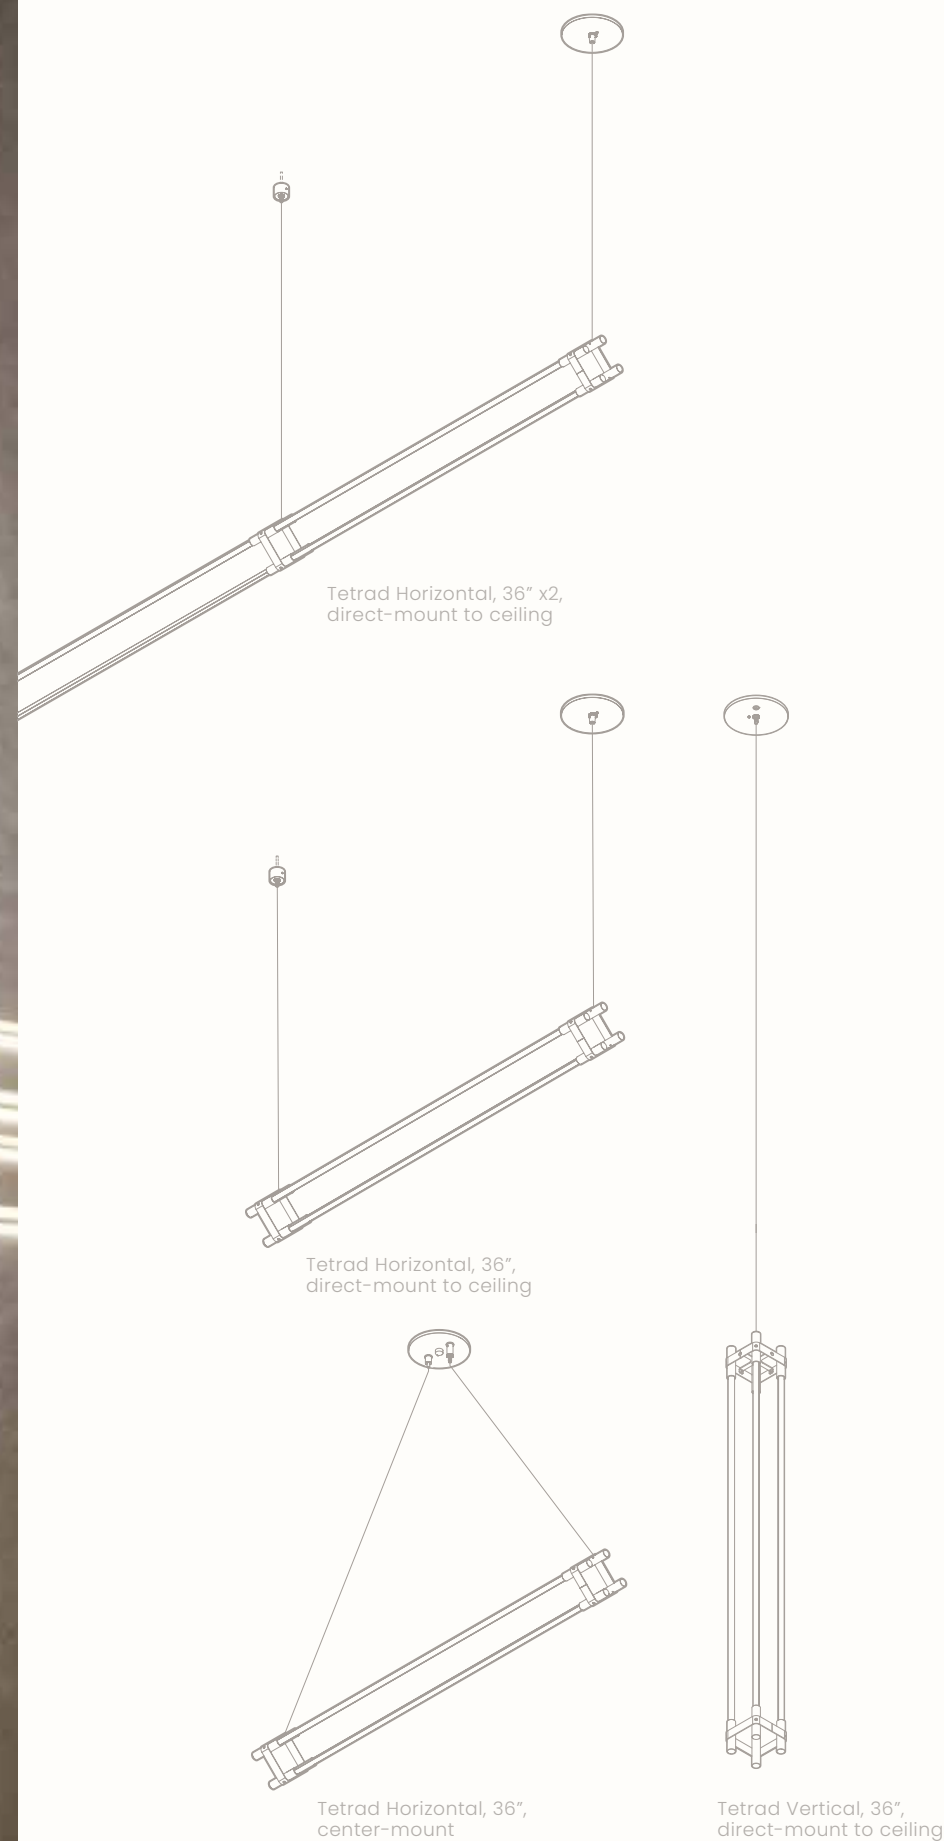



- a.** thin multiples dyad vertical, 36",
satin brass, direct-mount
- b.** thin multiples dyad horizontal, 36",
satin brass, direct-mount
- c.** thin multiples triad horizontal, 36",
black oxide, direct-mount
- d.** thin multiples tetrad horizontal, 36",
satin nickel, direct-mount



thin triad horizontal, 36",
satin brass, direct-mount

THIN PRIMARIES
SURFACE MOUNT
TRIANGLE

UL cUL CE FCC ΔDAMP RATED

DIMENSIONS
24 In or 36 In segment lengths

ORIENTATIONS
Wall-Mounted

SEGMENT QUANTITY
3 Segments total

STAND OFFS
1.75 In
3.5 In
7 In

WATTAGE & LUMENS
24 In - 20.4W, 0-1800LM total
36 In - 28.8W, 0-2760LM total

LIGHT TEMPERATURE
2700K, 3000K, 3500K, 4000K





LIGHT QUALITY
95+ CRI, R9 90+

MATERIALS
Solid Brass, PMMA

FINISHES
Satin Brass, Black Oxide, Satin Nickel

CERTIFICATIONS
CE, cUL, UL Title 24, DAMP Rated

MOUNTING
Direct-Mount To Surface

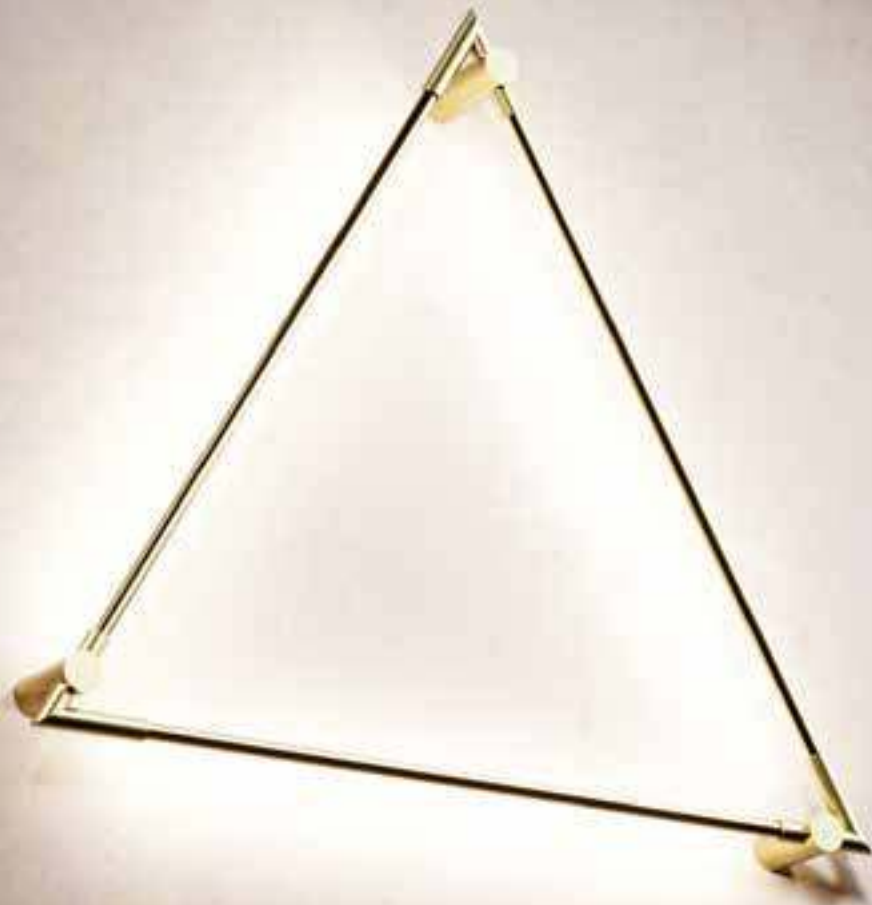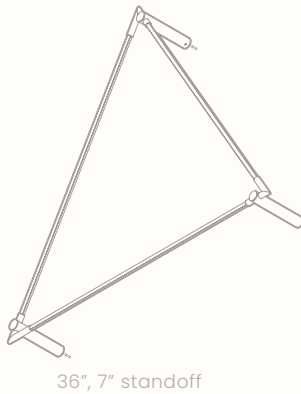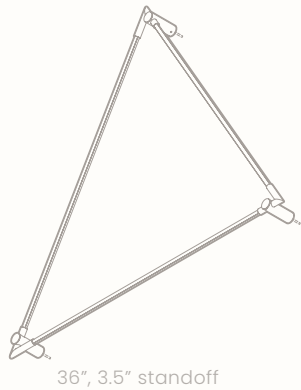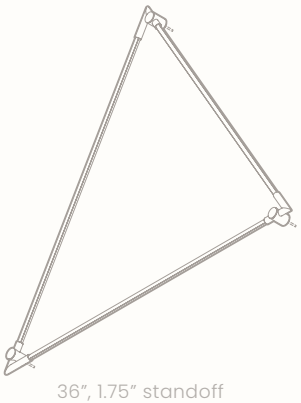

thin primaries triangle, 24" segments,
3.5" stand offs, satin brass, direct-mount



52

THIN PRIMARIES

SURFACE MOUNT

SQUARE

DIMENSIONS

24 In or 36 In segment lengths

ORIENTATIONS

Wall-Mounted

SEGMENT QUANTITY

4 Segments total

STAND OFFS

1.75 In

3.5 In

7 In

WATTAGE & LUMENS

24 In - 27.2W, 0-2400LM total

36 In - 38.4W, 0-3680LM total

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

95+ CRI, R9 90+

MATERIALS

Solid Brass, PMMA

FINISHES


Satin Brass, Black Oxide, Satin Nickel

CERTIFICATIONS


CE, cUL, UL Title 24, DAMP Rated

MOUNTING


Direct-Mount To Surface

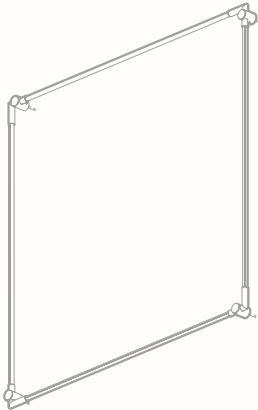

36", 1.75" standoff

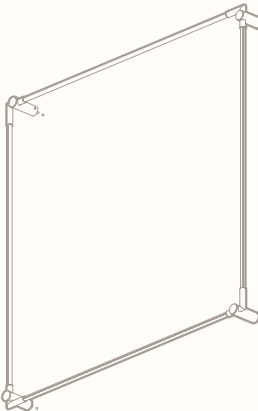

36", 3.5" standoff

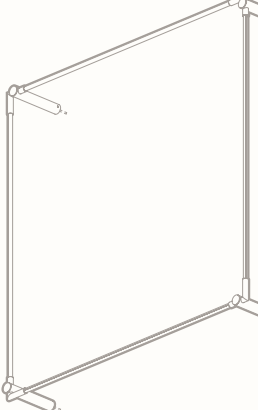

36", 7" standoff



thin primaries square, 36" segments,
3.5" stand offs, satin brass, direct-mount

THIN PRIMARIES
SURFACE MOUNT
RHOMBUS

UL cUL CE FCC DAMP RATED

DIMENSIONS
24 In or 36 In segment lengths

ORIENTATIONS
Wall-Mounted

SEGMENT QUANTITY
4 Segments total

STAND OFFS
1.75 In
3.5 In
7 In

WATTAGE & LUMENS
24 In - 27.2W, 0-2400LM total
36 In - 38.4W, 0-3680LM total

LIGHT TEMPERATURE
2700K, 3000K, 3500K, 4000K




LIGHT QUALITY
95+ CRI, R9 90+

MATERIALS
Solid Brass, PMMA

FINISHES
Satin Brass, Black Oxide, Satin Nickel

CERTIFICATIONS
CE, cUL, UL Title 24, DAMP Rated

MOUNTING
Direct-Mount To Surface

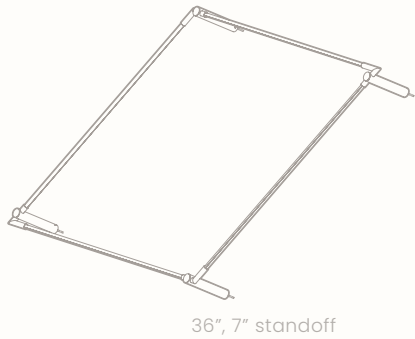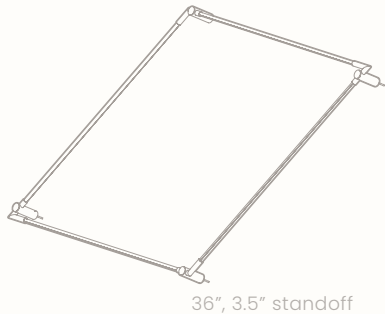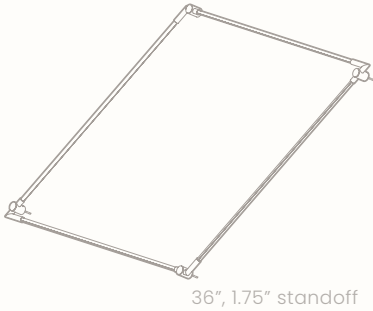

thin primaries rhombus, 24" segments,
1.75" stand offs, black oxide, direct-mount



56

THIN PRIMARIES

SURFACE MOUNT

RECTANGLE

DIMENSIONS

24 In or 36 In segment lengths

ORIENTATIONS

Wall-Mounted

SEGMENT QUANTITY

4 Segments total (Customizable)

STAND OFFS

1.75 In

3.5 In

7 In

WATTAGE & LUMENS

24 In - 6.8W, 0-600LM per segment

36 In - 9.6W, 0-920LM per segment

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

95+ CRI, R9 90+

MATERIALS

Solid Brass, PMMA

FINISHES


Satin Brass, Black Oxide, Satin Nickel

CERTIFICATIONS


CE, cUL, UL Title 24, DAMP Rated

MOUNTING


Direct-Mount To Surface

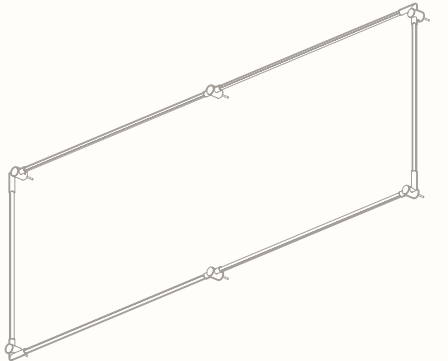

24"x72", 1.75" standoff

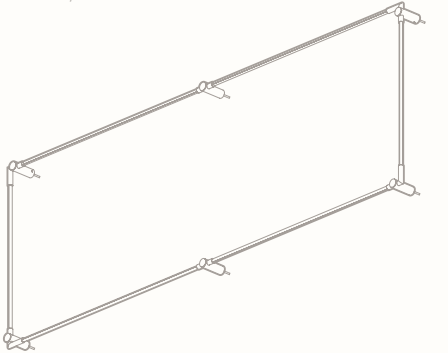

24"x72", 3.5" standoff

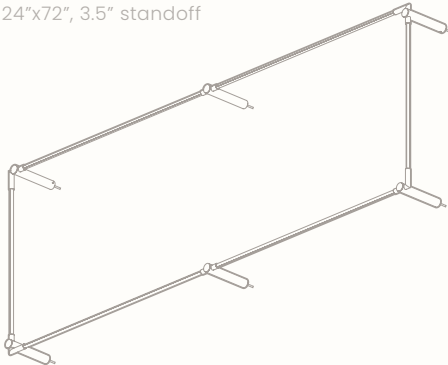

24"x72", 7" standoff



thin primaries rectangle, 24"x72",
3.5" stand offs, satin brass, direct-mount

THIN PRIMARIES

SURFACE MOUNT

HEXAGON

UL cUL CE FC DAMP RATED

DIMENSIONS

24 In or 36 In segment lengths

ORIENTATIONS

Wall-Mounted

SEGMENT QUANTITY

6 Segments total

STAND OFFS

1.75 In

3.5 In

7 In

WATTAGE & LUMENS

24 In - 40.8W, 0-3600LM total

36 In - 57.6W, 0-5500LM total

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

95+ CRI, R9 90+

MATERIALS

Solid Brass, PMMA

FINISHES


Satin Brass, Black Oxide, Satin Nickel

CERTIFICATIONS


CE, cUL, UL Title 24, DAMP Rated

MOUNTING


Direct-Mount To Surface

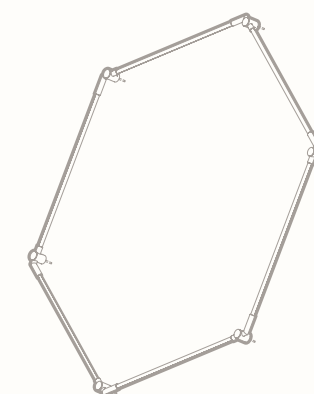

36", 1.75" standoff

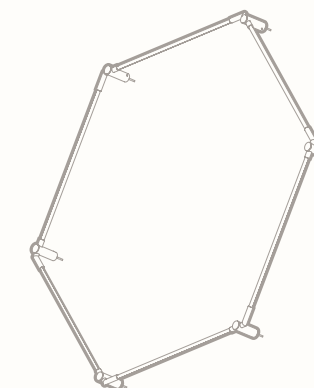

36", 3.5" standoff

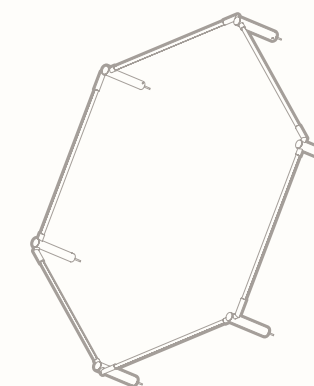

36", 7" standoff

thin primaries hexagon, 24" segments,
3.5" stand offs, satin brass, direct-mount



60

THIN PRIMARIES

SURFACE MOUNT

OCTAGON

UL

cUL

CE

FC

DAMP RATED

DIMENSIONS

24 In or 36 In segment lengths

ORIENTATIONS

Wall-Mounted

SEGMENT QUANTITY

8 Segments total

STAND OFFS

1.75 In

3.5 In

7 In

WATTAGE & LUMENS

24 In - 54.4W, 0-4800LM total

36 In - 76.8W, 0-7400LM total

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

95+ CRI, R9 90+

MATERIALS

Solid Brass, PMMA

FINISHES


Satin Brass, Black Oxide, Satin Nickel

CERTIFICATIONS


CE, cUL, UL Title 24, DAMP Rated

MOUNTING


Direct-Mount To Surface

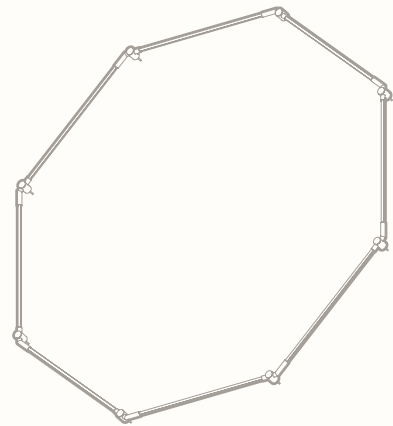

36", 1.75" standoff

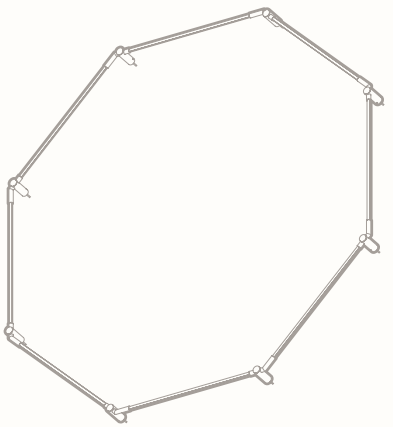

36", 3.5" standoff

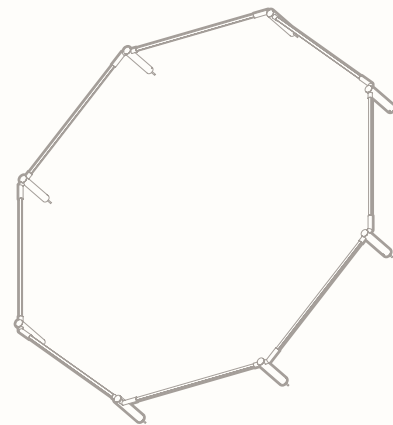

36", 7" standoff



thin primaries octagon, 24" segments,
7" stand offs, satin nickel, direct-mount



THIN PRIMARIES

SUSPENDED TRIANGLE

UL cUL CE FC DAMP RATED

DIMENSIONS

24 In or 36 In segment lengths

ORIENTATIONS

Suspended

SEGMENT QUANTITY

3 Segments total

WATTAGE & LUMENS

24 In - 20.4W, 0-1800LM total

36 In - 28.8W, 0-2760LM total

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

95+ CRI, R9 90+

MATERIALS

Solid Brass, PMMA

FINISHES


Satin Brass, Black Oxide, Satin Nickel

CERTIFICATIONS


CE, cUL, UL Title 24, DAMP Rated

MOUNTING


Direct-Mount To Ceiling, Center-Mount,
Center-Mount With Cable Collar, Mini Mount

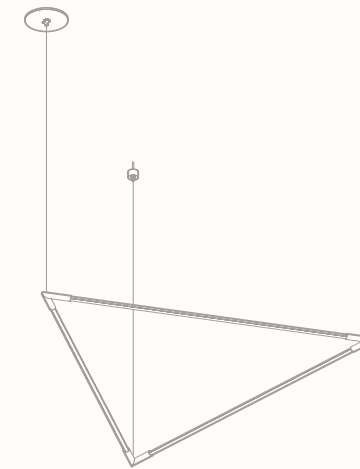

36", direct-mount to ceiling

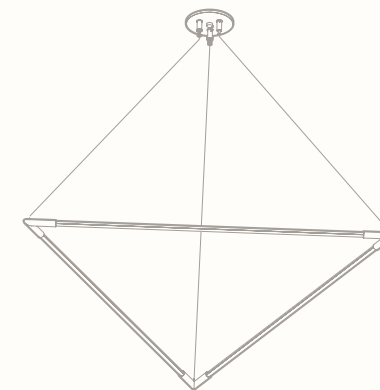

36", center-mount

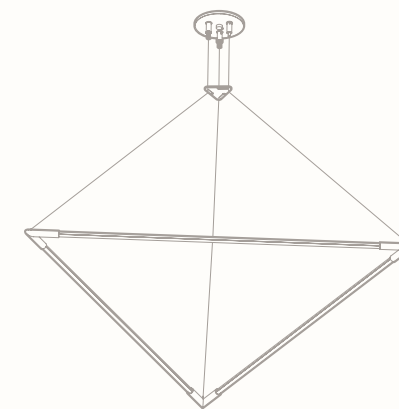

36", center-mount with
cable collar



64

THIN PRIMARIES

SUSPENDED SQUARE

DIMENSIONS

24 In or 36 In segment lengths

ORIENTATIONS

Suspended

SEGMENT QUANTITY

4 Segments total

WATTAGE & LUMENS

24 In - 27.2W, 0-2400LM total

36 In - 38.4W, 0-3680LM total

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

95+ CRI, R9 90+

MATERIALS

Solid Brass, PMMA

FINISHES




Satin Brass, Black Oxide, Satin Nickel

CERTIFICATIONS

CE, cUL, UL Title 24, DAMP Rated

MOUNTING

Direct-Mount To Ceiling, Center-Mount,
Center-Mount With Cable Collar, Mini Mount

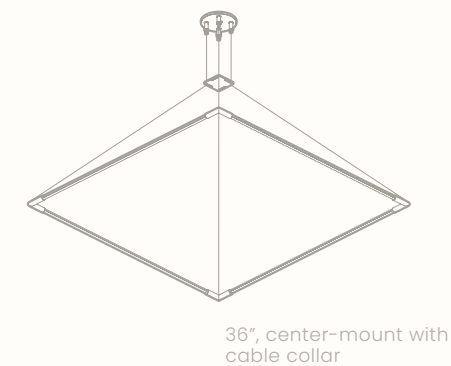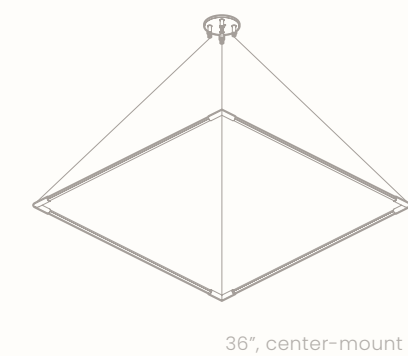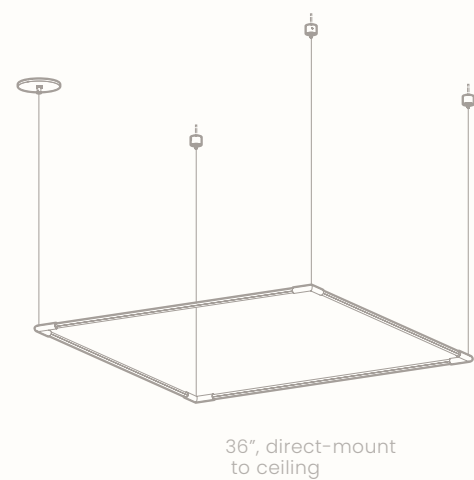

THIN PRIMARIES

SUSPENDED RHOMBUS

UL cUL CE FC DAMP RATED

DIMENSIONS
24 In or 36 In segment lengths

ORIENTATIONS
Suspended

SEGMENT QUANTITY
4 Segments total

WATTAGE & LUMENS
24 In - 27.2W, 0-2400LM total
36 In - 38.4W, 0-3680LM total

LIGHT TEMPERATURE
2700K, 3000K, 3500K, 4000K


LIGHT QUALITY
95+ CRI, R9 90+

MATERIALS
Solid Brass, PMMA


FINISHES
Satin Brass, Black Oxide, Satin Nickel

CERTIFICATIONS
CE, cUL, UL Title 24, DAMP Rated


MOUNTING
Direct-Mount To Ceiling, Center-Mount,
Center-Mount With Cable Collar, Mini Mount

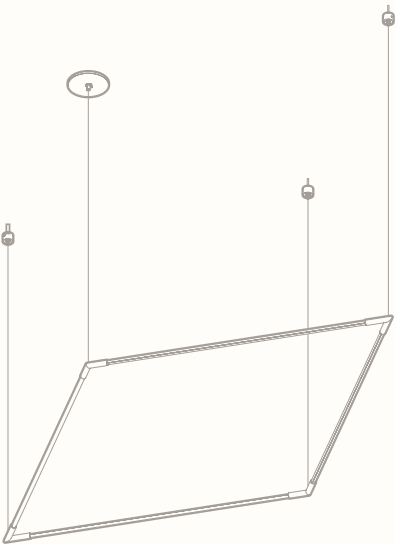

36", direct-mount to ceiling

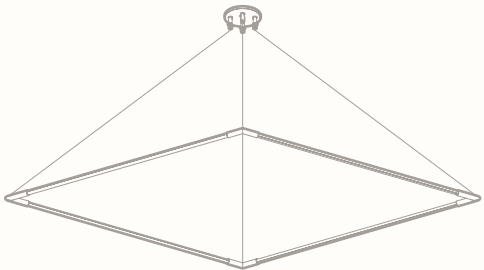

36", center-mount

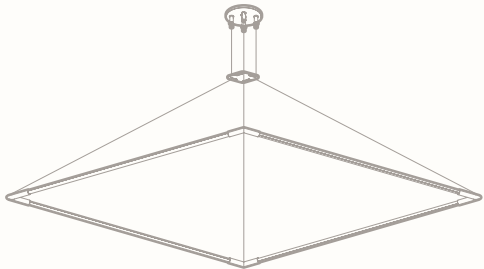

36", center-mount with cable collar

thin primaries rhombus, 24" segments, x4,
satin brass, center-mount



68

THIN PRIMARIES

SUSPENDED RECTANGLE

DIMENSIONS
24 In or 36 In segment lengths

ORIENTATIONS
Suspended

SEGMENT QUANTITY
4 or 6 Segments total

WATTAGE & LUMENS
24 In - 6.8W, 0-600LM per segment
36 In - 9.6W, 0-920LM per segment

LIGHT TEMPERATURE
2700K, 3000K, 3500K, 4000K


LIGHT QUALITY
95+ CRI, R9 90+

MATERIALS
Solid Brass, PMMA


FINISHES
Satin Brass, Black Oxide, Satin Nickel

CERTIFICATIONS
CE, cUL, UL Title 24, DAMP Rated

MOUNTING
Direct-Mount To Ceiling, Center-Mount,
Center-Mount With Cable Collar, Mini Mount

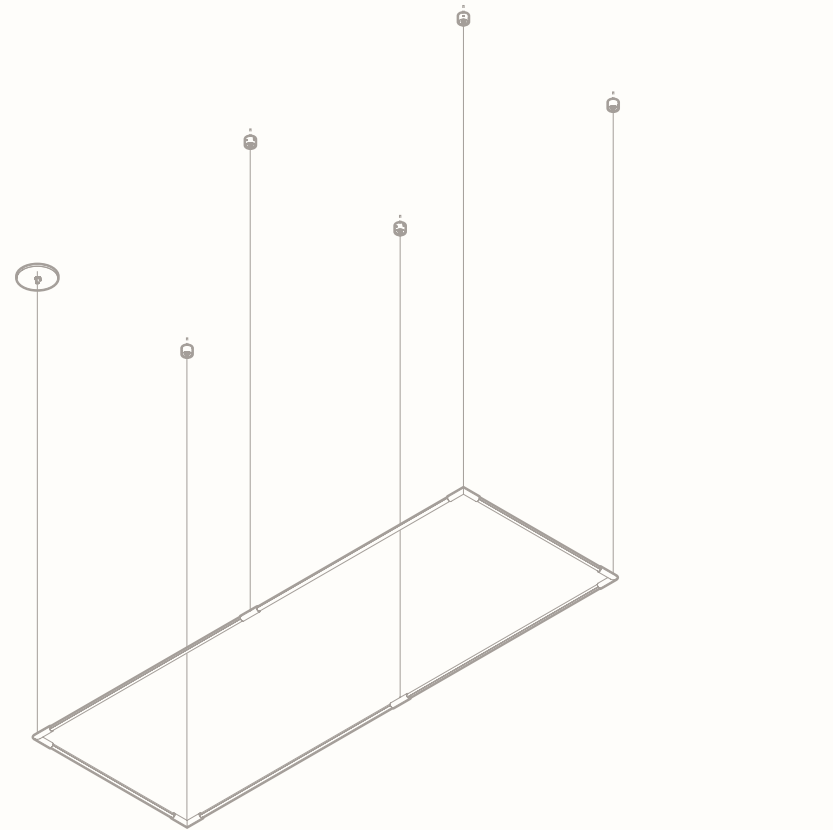


24x72", direct-mount to ceiling

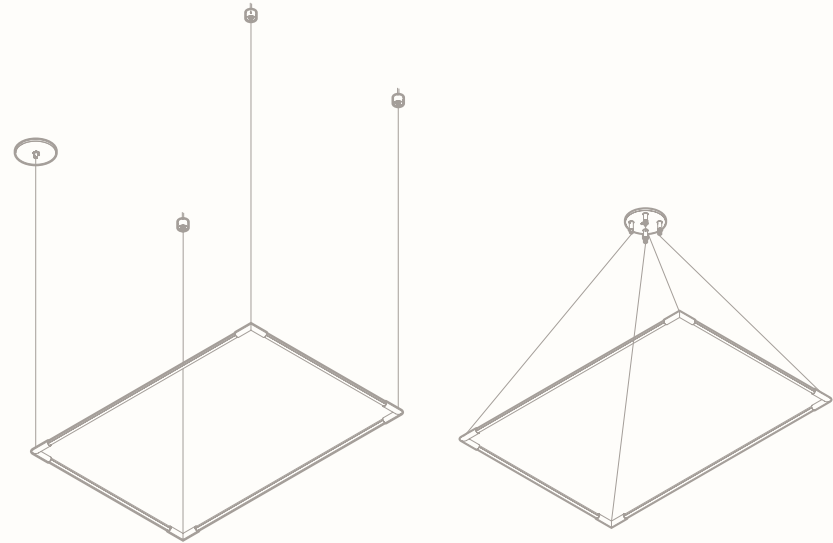

24x36", direct-mount to ceiling

24x36", center-mount

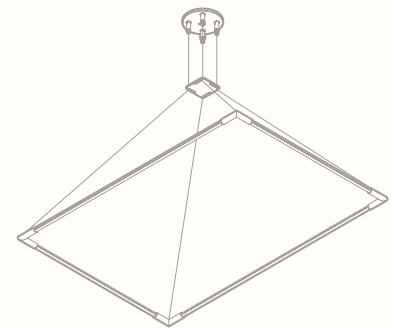

24x36", center-mount
with cable collar



thin primaries rectangle, 24"x36",
black oxide, center mount



thin primaries hexagon, 36" segments, x6,
satin nickel, center mount

UL cUL CE FCC DAMP RATED

DIMENSIONS
24 In or 36 In segment lengths

ORIENTATIONS
Suspended

SEGMENT QUANTITY
6 Segments total

WATTAGE & LUMENS
24 In - 40.8W, 0-3600LM total
36 In - 57.6W, 0-5500LM total

LIGHT TEMPERATURE
2700K, 3000K, 3500K, 4000K


LIGHT QUALITY
95+ CRI, R9 90+

MATERIALS
Solid Brass, PMMA


FINISHES
Satin Brass, Black Oxide, Satin Nickel

CERTIFICATIONS
CE, cUL, UL Title 24, DAMP Rated


MOUNTING
Direct-Mount To Ceiling, Center-Mount,
Center-Mount With Cable Collar, Mini Mount

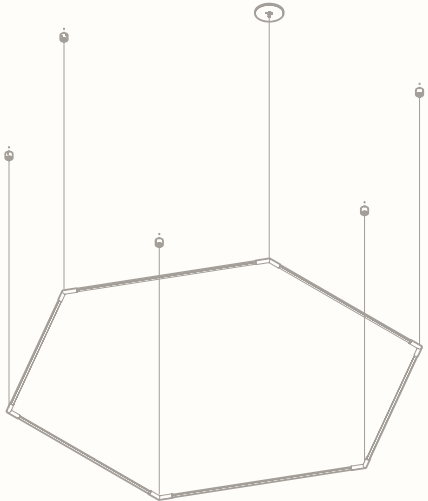

36", direct-mount to ceiling

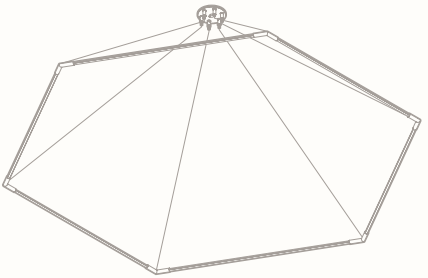

36", center-mount

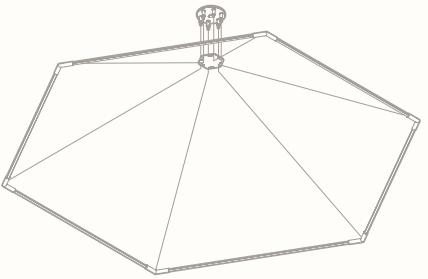

36", center-mount with
cable collar



THIN PRIMARIES

SUSPENDED OCTAGON

UL cUL CE FCC DAMP RATED

DIMENSIONS
24 In or 36 In segment lengths

ORIENTATIONS
Suspended

SEGMENT QUANTITY
8 Segments total

WATTAGE & LUMENS
24 In - 54.4W, 0-4800LM total
36 In - 76.8W, 0-7400LM total

LIGHT TEMPERATURE
2700K, 3000K, 3500K, 4000K


LIGHT QUALITY
95+ CRI, R9 90+

MATERIALS
Solid Brass, PMMA


FINISHES
Satin Brass, Black Oxide, Satin Nickel

CERTIFICATIONS
CE, cUL, UL Title 24, DAMP Rated

MOUNTING
Direct-Mount To Ceiling, Center-Mount, Mini Mount

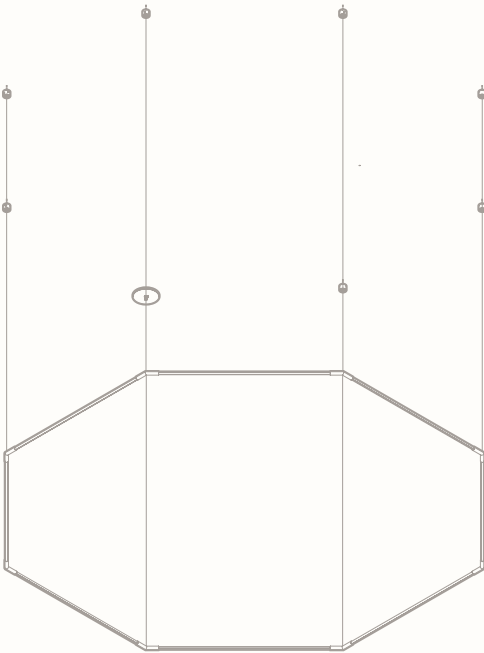

36", direct-mount to ceiling

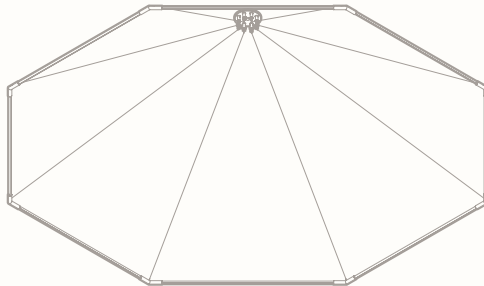

36", center-mount



thin primaries octagon, 36" segments, x8,
satin brass, center mount






- a.** thin primaries hexagon, 24" segments, satin brass, 7" stand offs, direct-mount
- b.** thin primaries hexagon, 24" segments, black oxide, 3.5" stand offs, direct-mount
- c.** thin primaries hexagon, 24" segments, satin nickel, 1.75" stand offs, direct-mount




- b.** thin primaries hexagon, 36" segments, x6, satin nickel, center mount

THIN SOLIDS


UL cUL CE FCC ΔDAMP RATED CUBE

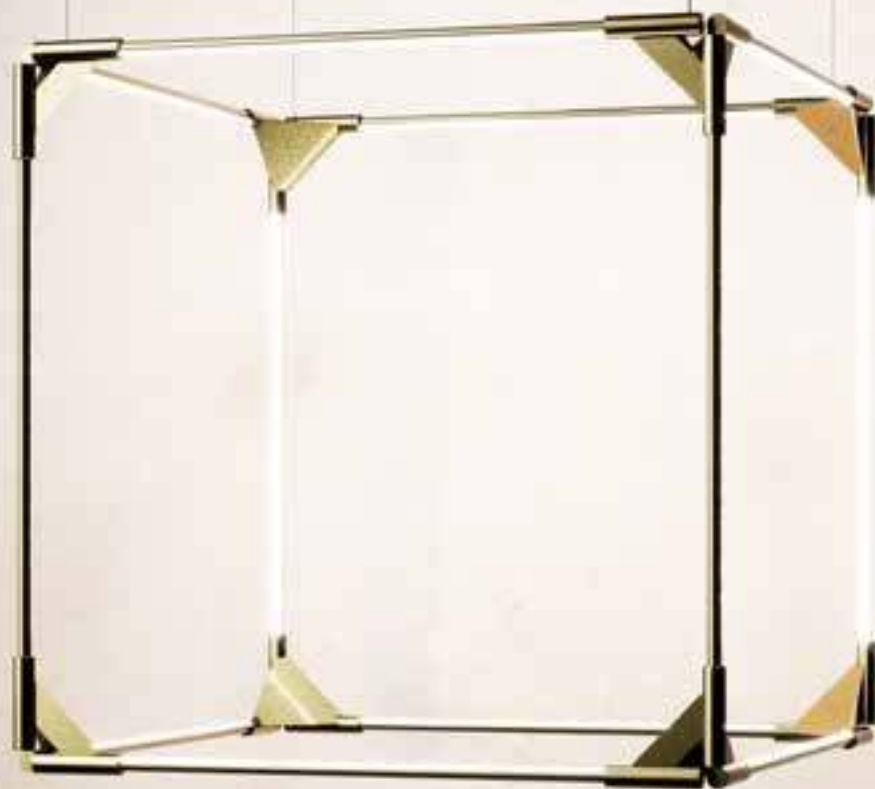


thin solids cube, 18" segments, x12,
satin brass, direct-mount,
4 mounting points

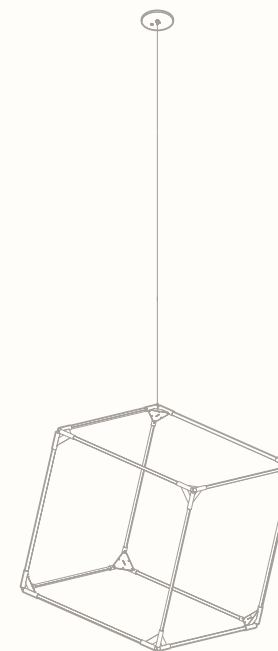


24", direct-mount to
ceiling, 1 mounting point

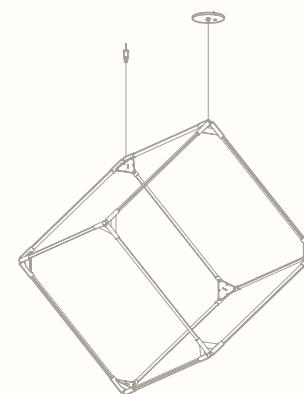


24", direct-mount to ceiling,
2 mounting points

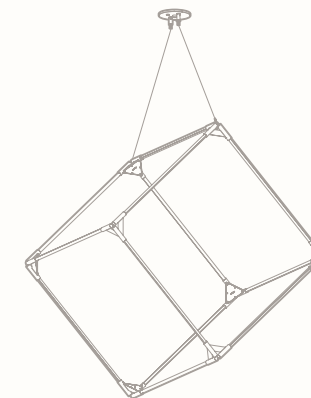

24", center-mount to
canopy, 2 mounting points

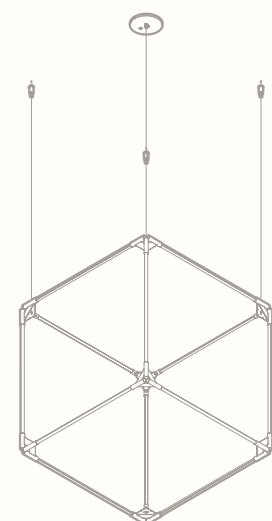

24", direct-mount to ceiling,
4 mounting points

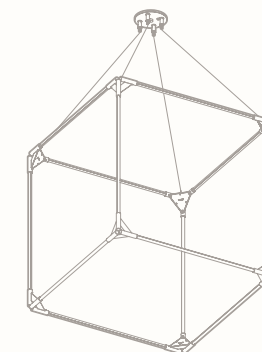

24" center-mount to
canopy, 4 mounting points

DIMENSIONS

12 In, 18 In, or 24 In lengths

WATTAGE & LUMENS

12 In - 40.8W, 0-3600LM total

18 In - 61.2W, 0-5400LM total

24 In - 81.6W, 0-7200LM total

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

95+ CRI, R9 90+

MATERIALS

Solid Brass, PMMA

FINISHES

Satin Brass, Black Oxide, Satin Nickel

CERTIFICATIONS

CE, cUL, UL Title 24, DAMP Rated

MOUNTING

1, 2 or 4 Mounting Points, Center-Mount,
Direct-Mount To Ceiling

THIN SOLIDS

TETRAHEDRON

UL cUL CE FCC DAMP RATED

DIMENSIONS

12 In, 18 In, or 24 In Lengths

WATTAGE & LUMENS

- 12 In - 20.4W, 0-1800LM total
- 18 In - 30.6W, 0-2700LM total
- 24 In - 40.8W, 0-3600LM total

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

95+ CRI, R9 90+

MATERIALS

Solid Brass, PMMA

FINISHES


Satin Brass, Black Oxide, Satin Nickel

CERTIFICATIONS


CE, cUL, UL Title 24, DAMP Rated

MOUNTING


1 or 3 Mounting Points, Center-Mount,
Direct-Mount To Ceiling, Mini Mount

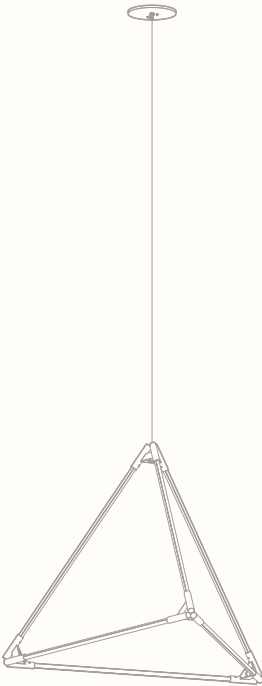

24", direct-mount to ceiling, 1 mounting point

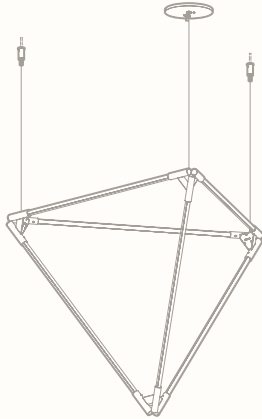

24", direct-mount to ceiling, 3 mounting points

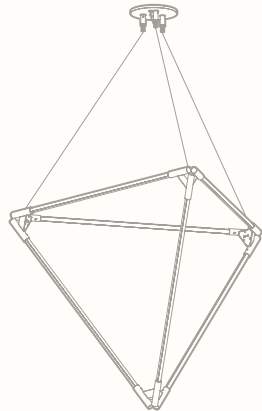

24", center-mount to ceiling, 3 mounting points



thin solids tetrahedron, 18" segments, x6,
black oxide, direct mount, 1 mounting point

THIN SOLIDS DIAMOND

UL cUL CE FC Δ DAMP RATED

DIMENSIONS

12 In, 18 In, or 24 In Lengths

WATTAGE & LUMENS

12 In - 30.6W, 0-2700LM total

18 In - 45.9W, 0-4050LM total

24 In - 61.2W, 0-5400LM total

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

95+ CRI, R9 90+

MATERIALS

Solid Brass, PMMA

FINISHES


Satin Brass, Black Oxide, Satin Nickel

CERTIFICATIONS

CE, cUL, UL Title 24, DAMP Rated

MOUNTING

1 Mounting Point, Direct-Mount, Mini Mount

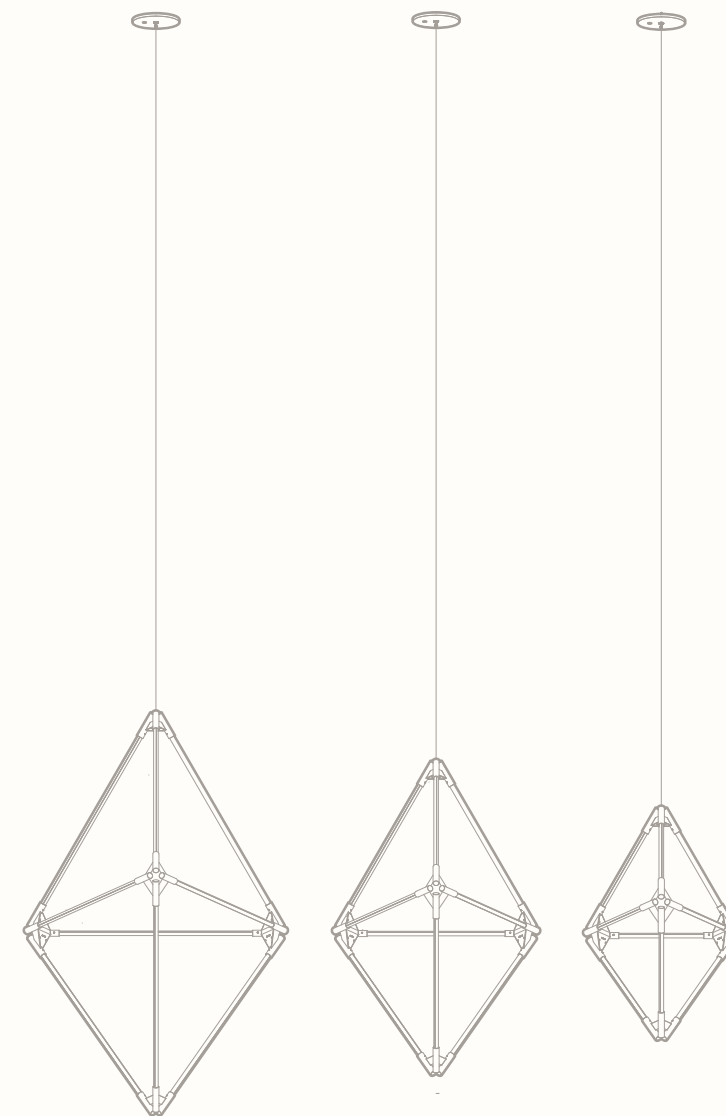

24", direct-mount to ceiling

18", direct-mount to ceiling

12", direct-mount to ceiling

thin solids diamond, 18" segments, x9,
satin brass, direct mount, 1 mounting point

82

THIN
CHANDELIER

DIMENSIONS
Small – 87 In Ø Expanded
Large – 127 In Ø Expanded

SEGMENT QUANTITY
12 Segments total

WATTAGE & LUMENS
Small – 48W, 0–5300LM total
Large – 80W, 0–8850LM total

LIGHT TEMPERATURE
2700K, 3000K, 3500K, 4000K


LIGHT QUALITY
95+ CRI, R9 90+

MATERIALS
Brass, Acrylic, PMMA

FINISHES
Satin Brass, Black Oxide, Satin Nickel

CERTIFICATIONS
CE, cUL, UL

MOUNTING
Direct-Mount To Ceiling

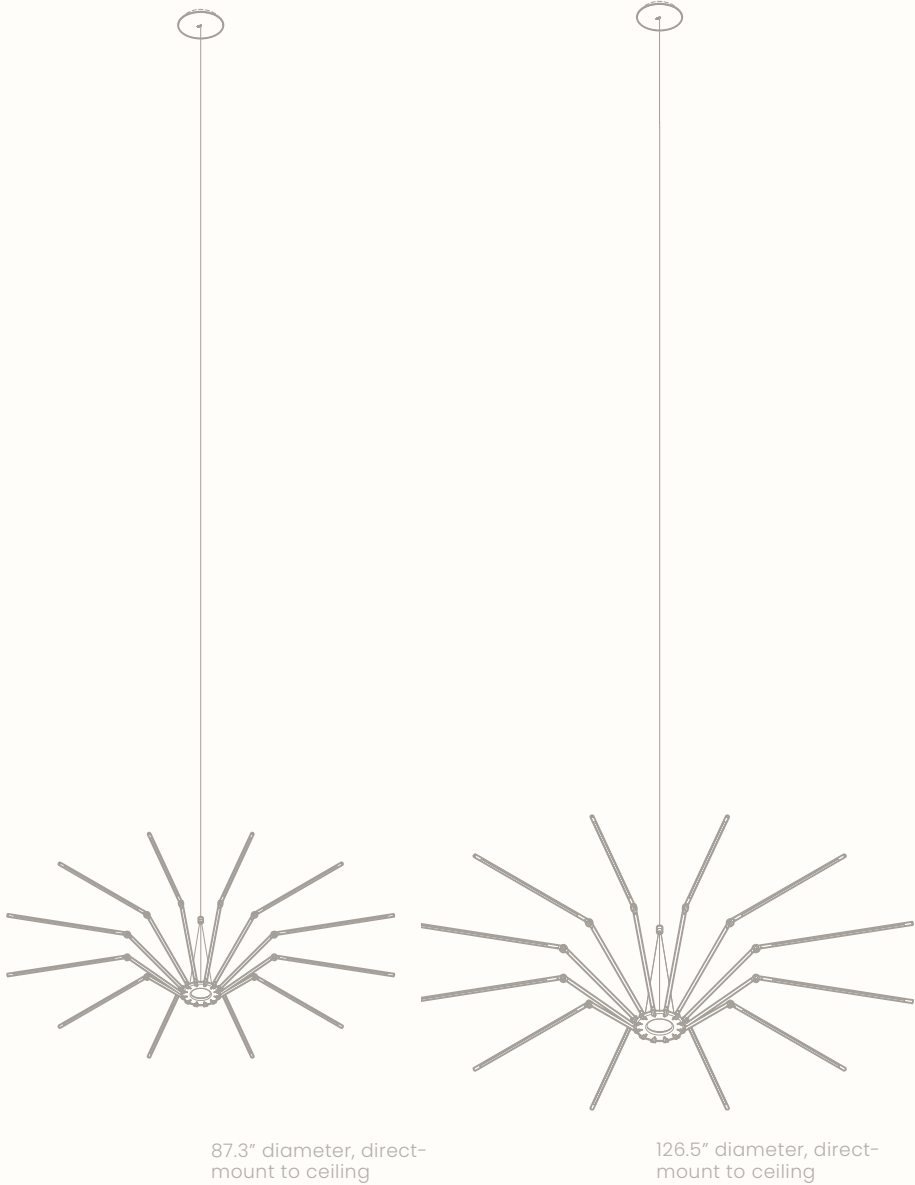

thin chandelier, large,
satin brass, direct-mount






thin chandelier, large,
satin brass, direct-mount



thin solids diamond, 18"
segments,

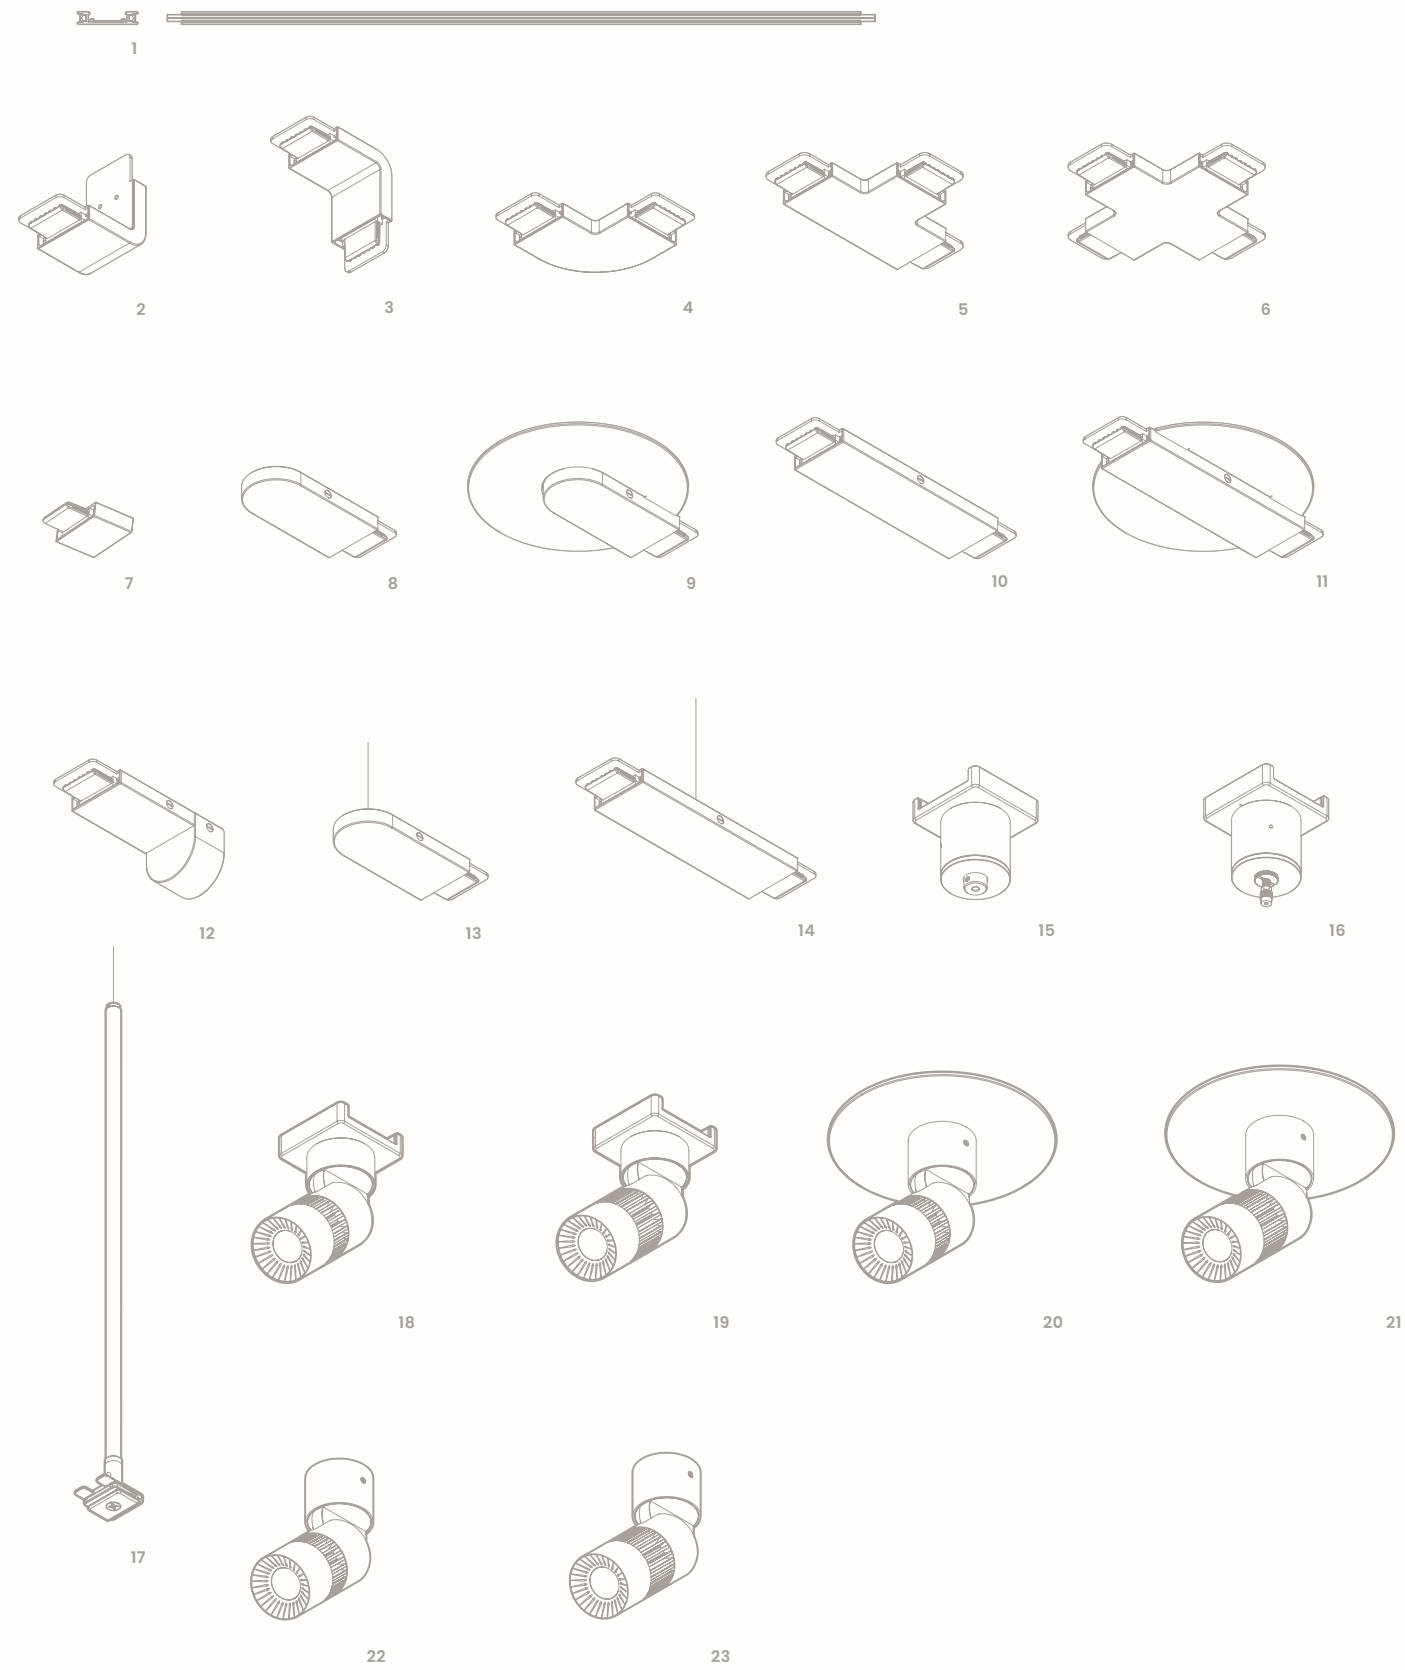

MULTIVERSE SYSTEM

RIBBON	1
OUT-OF-PLANE CONNECTOR	2
IN-PLANE CONNECTOR	3
CORNER CONNECTOR	4
T CONNECTOR	5
X CONNECTOR	6
DUMMY END	7
SURFACE RIBBON END POWER FEED	8
SURFACE RIBBON END POWER FEED JUNCTION COVER	9
SURFACE RIBBON INLINE POWER FEED	10
SURFACE RIBBON INLINE POWER FEED JUNCTION COVER	11
SURFACE RIBBON END CONDUIT POWER FEED	12
SUSPENDED RIBBON END POWER FEED	13
SUSPENDED RIBBON INLINE POWER FEED	14
RIBBON ADAPTERS POWER	15
RIBBON ADAPTERS SUSPENSION	16
RIBBON SUSPENSION MOUNT	17
SPOTLIGHT SMALL	18
SPOTLIGHT LARGE	19
MONOPOINT SMALL JUNCTION COVER	20
MONOPONIT LARGE JUNCTION COVER	21
MONOPOINT SMALL	22
MONOPONIT LARGE	23

MULTIVERSE SYSTEM AT A GLANCE

FEATURES AND BENEFITS



ULTRA LOW PROFILE RIBBON TRACK

MAGNETIC CONNECTION
SURFACE OR SUSPENSION MOUNT



LUMINAIRE FINISHES

HIGH PERFORMANCE URETHANE ENAMELS
SATIN WHITE, SATIN BLACK, SATIN
ALUMINUM, CUSTOM COLORS

RIBBON FINISHES

HIGH PERFORMANCE URETHANE ENAMELS
PRIMER WHITE*, SATIN WHITE, SATIN BLACK,
SATIN ALUMINUM, CUSTOM COLORS

* — Primer white ribbon is field paintable.

SIMPLE INSTALLATION

SURFACE MOUNTED CLIP SYSTEM
FIELD CUTTABLE
JUNCTION BOX COVERS
SURFACE MOUNTED POWER SUPPLIES

SUPERIOR LIGHT QUALITY

90+ CRI
85 LUMENS/WATT DELIVERED AVERAGE
FLICKER FREE DIMMING

CONNECTORS

90, 3-WAY, 4-WAY AND OUT-OF-PLANE
ALL STANDARD

COLOR TEMPERATURES

2700K, 3000K, 3500K, 4000K

VOLTAGE DROP CORRECTION

150’ OF RIBBON CAN BE POWERED VIA A SINGLE
96W POWER SUPPLY
ADD POWER SUPPLIES FOR LONGER RUNS WITH
SEAMLESS CONTINUITY

DIMMING


2 CIRCUITS STANDARD
0–10V OR PHASE
CASAMBI WIRELESS AVAILABLE

POWER SUPPLIES

24V DC
REMOTE AND SURFACE MOUNTED OPTIONS AVAILABLE

SPOTLIGHTS

500 AND 800 LM OUTPUT
FIELD REPLACEABLE BEAM ANGLES
21°, 37°, 50° STANDARD
PRECISION MACHINED ALUMINUM
FULL 360° ROTATION AND 0–90° TILT

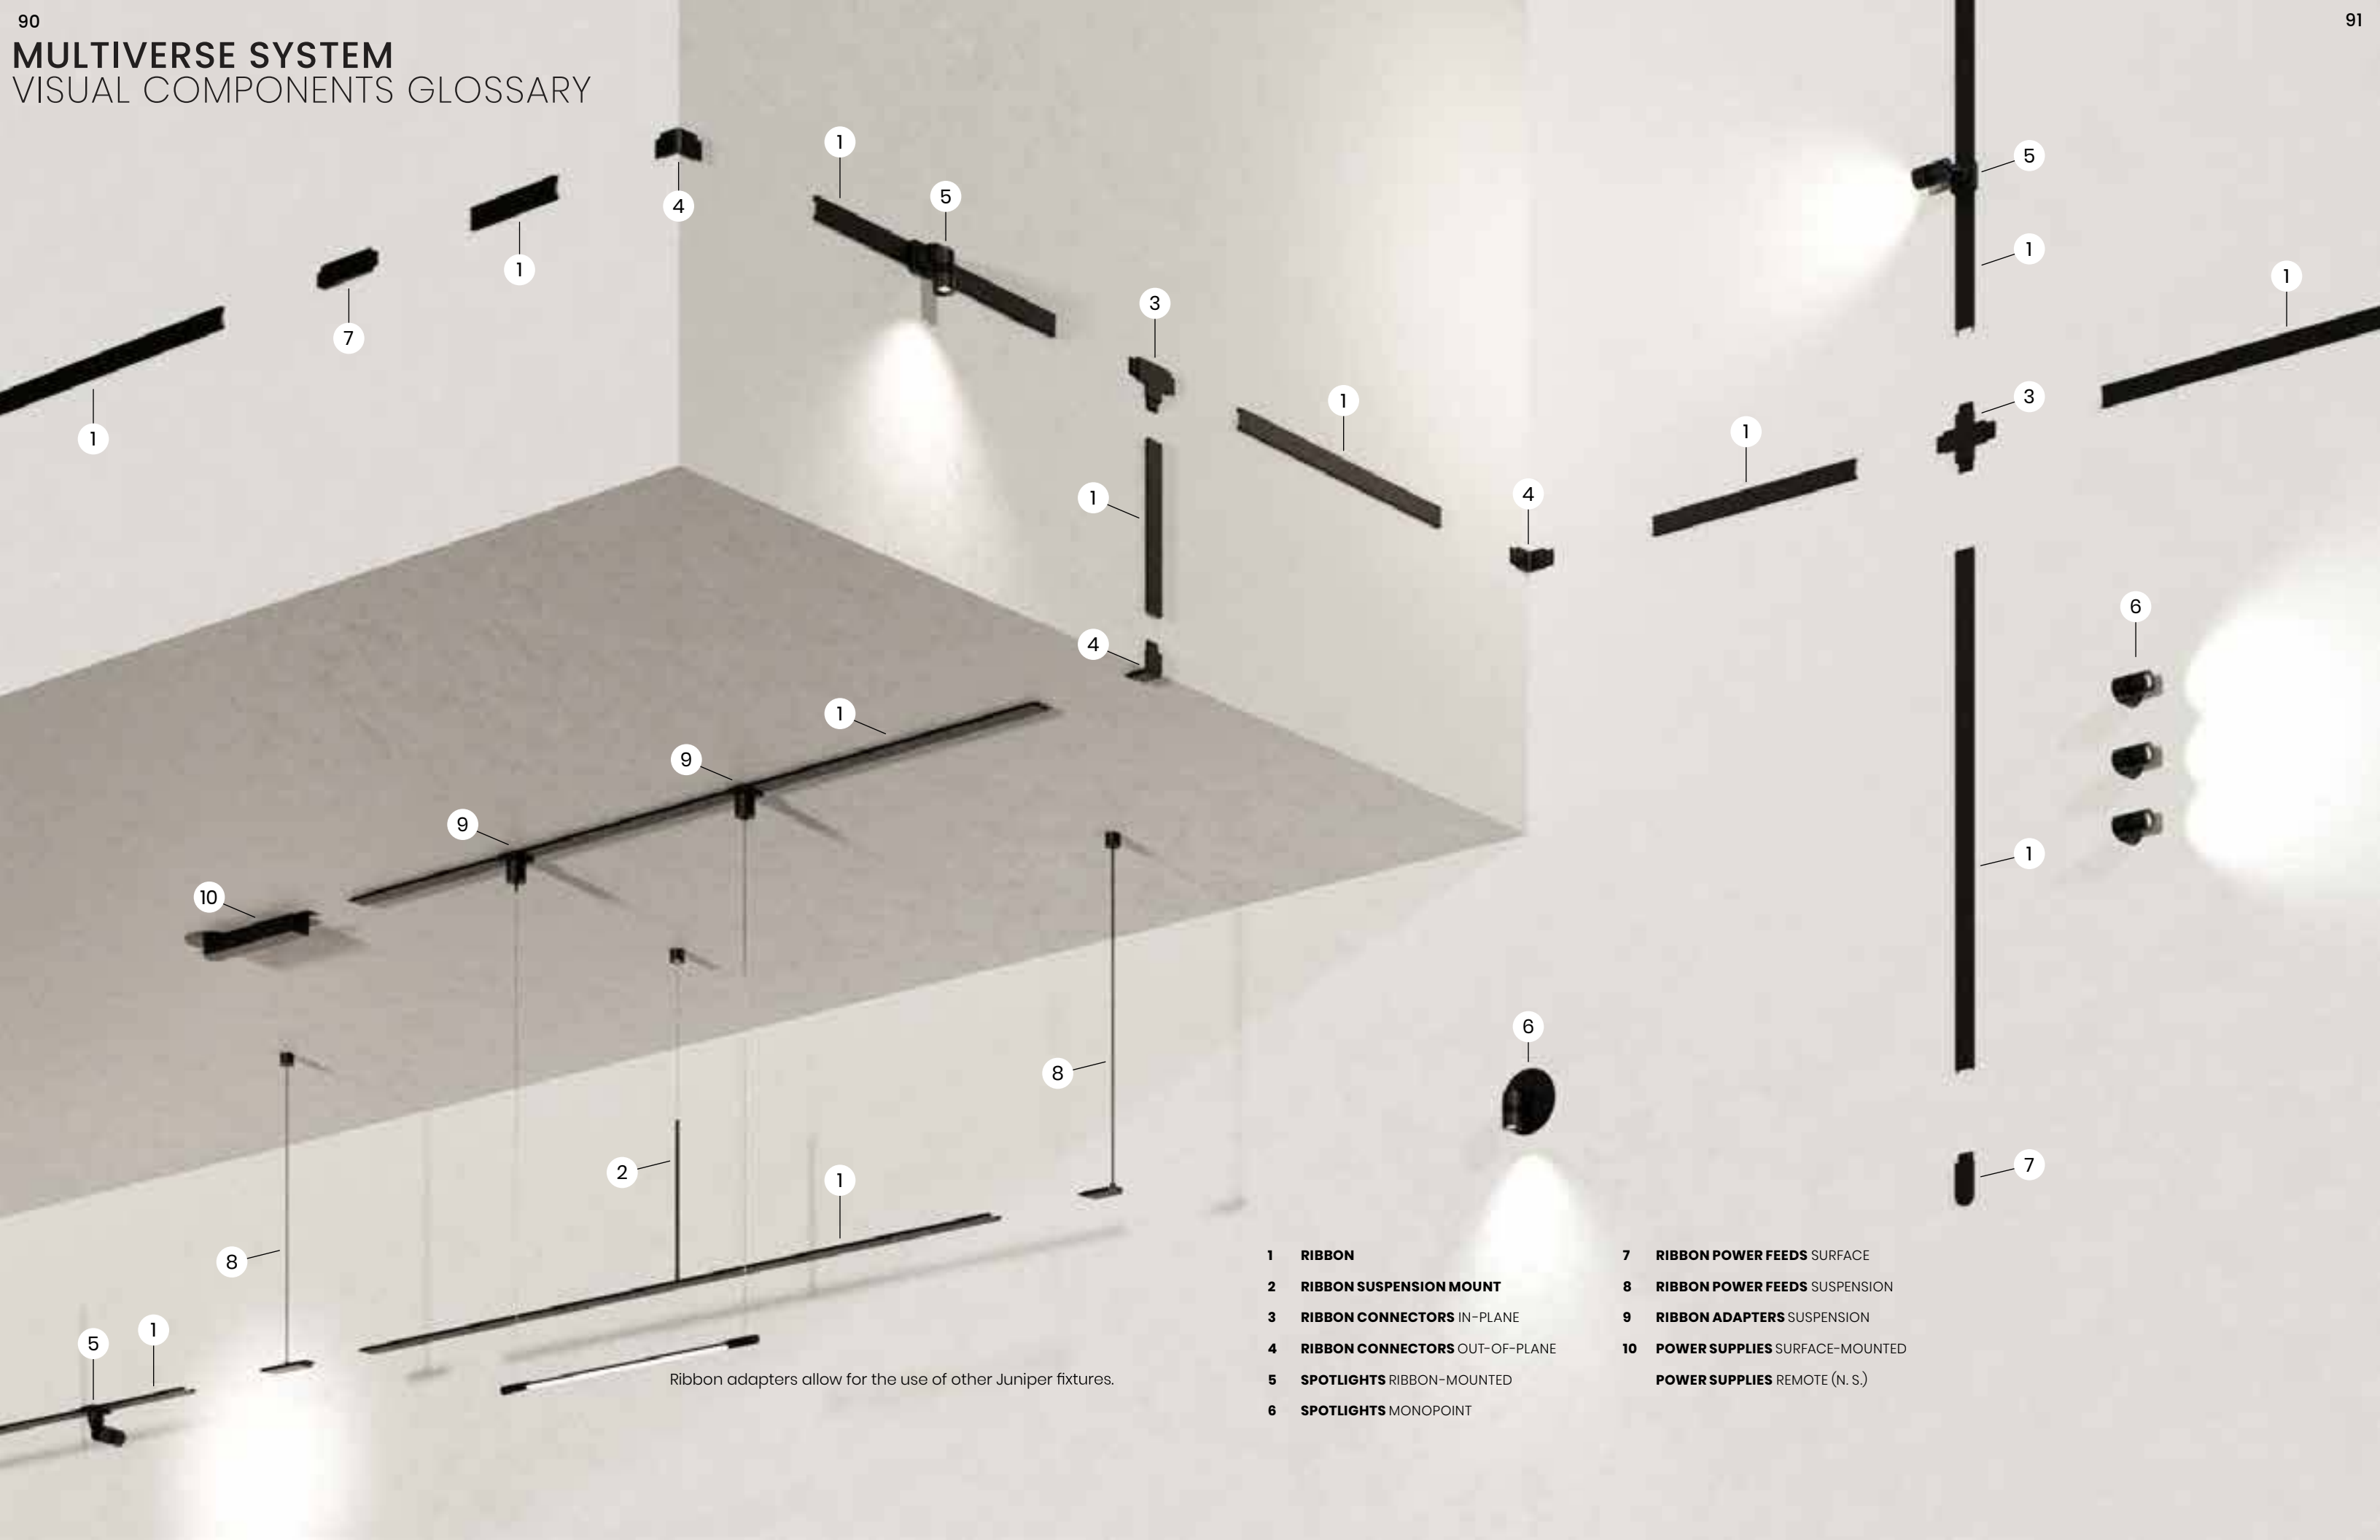

Ribbon adapters allow for the use of other Juniper fixtures.

- 1

RIBBON
- 2

RIBBON SUSPENSION MOUNT
- 3

RIBBON CONNECTORS IN-PLANE
- 4

RIBBON CONNECTORS OUT-OF-PLANE
- 5

SPOTLIGHTS RIBBON-MOUNTED
- 6

SPOTLIGHTS MONOPOINT
- 7

RIBBON POWER FEEDS SURFACE
- 8

RIBBON POWER FEEDS SUSPENSION
- 9

RIBBON ADAPTERS SUSPENSION
- 10

POWER SUPPLIES SURFACE-MOUNTED
POWER SUPPLIES REMOTE (N. S.)



ribbon
matte black



ribbon, in and out-of-plan connectors
matte black




a. spotlight large
satin aluminum
b. spotlight small
satin black








ribbon, spotlights small and large
off-white



spotlight
mustard

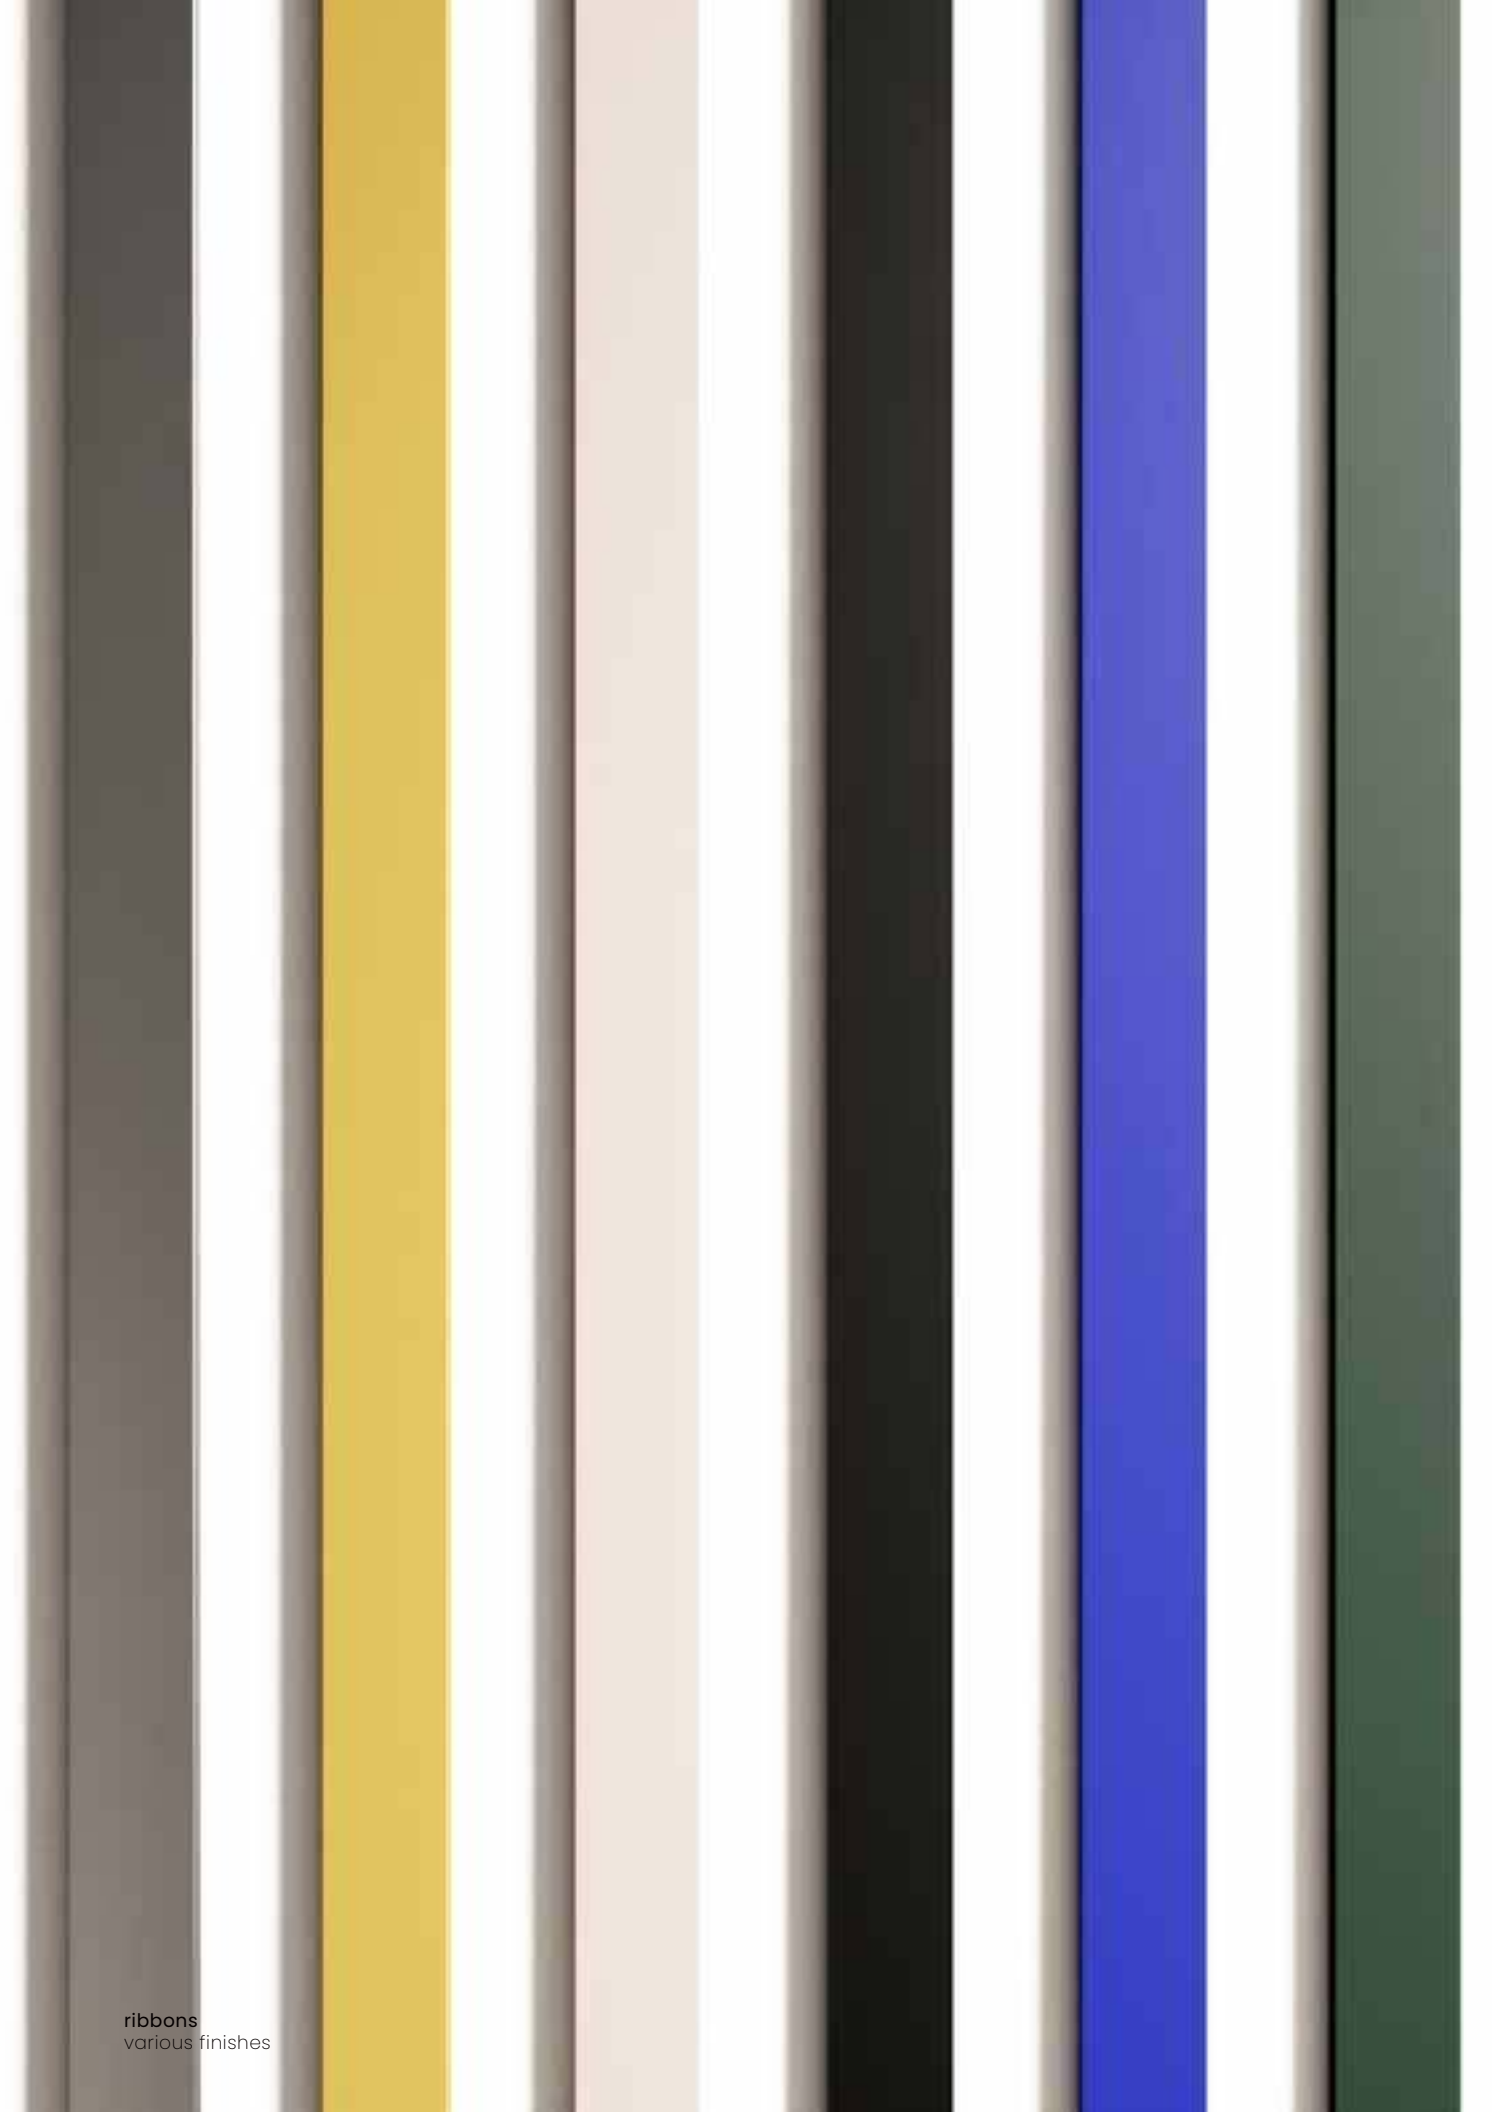


ribbons
various finishes

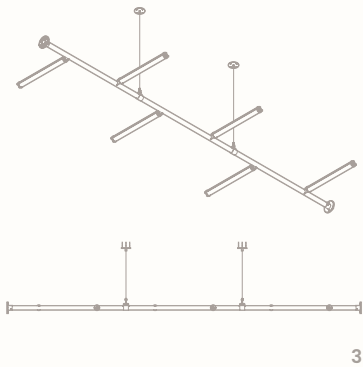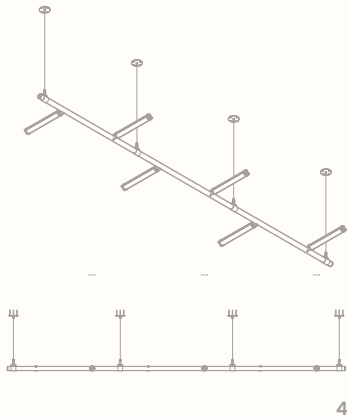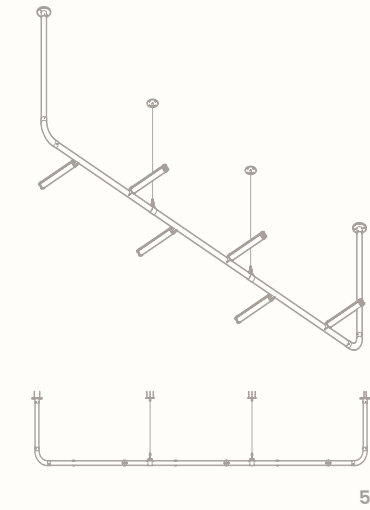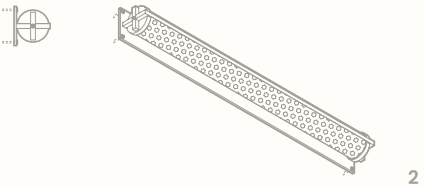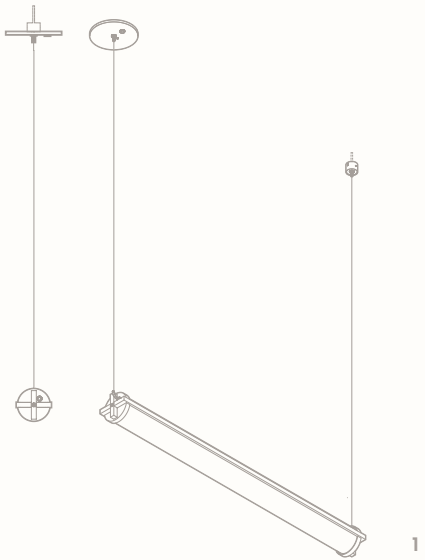

METROPOLIS SYSTEM

METROPOLIS SUSPENSION	1
METROPOLIS WALL SCONCE	2
METROPOLIS WALL-TO-WALL, WALL-TO-WALL MOUNT	3
METROPOLIS WALL-TO-WALL, SUSPENSION MOUNT	4
METROPOLIS WALL-TO-WALL, CEILING MOUNT	5



METROPOLIS

UL cUL CE FCC SUSPENSION

DIMENSIONS

36 In or 48 In Lengths, 3.5 In Ø

WATTAGE & LUMENS

36 In - 61W, 0-6100LM Delivered

48 In - 81W, 0-8200LM Delivered

LIGHT TEMPERATURE

2400K, 2700K, 3000K

LIGHT QUALITY

90CRI

MATERIALS

Aluminum, Frosted Acrylic, Blackened Steel

FINISHES

Satin Brass, Satin Aluminum, Polished Aluminum, Polished Brass, All Black

CERTIFICATIONS


CE, cUL, UL

OTHER FEATURES

Black Hexagonal Mesh Available
Direct/Indirect Dimming

MOUNTING

Direct-Mount To Ceiling

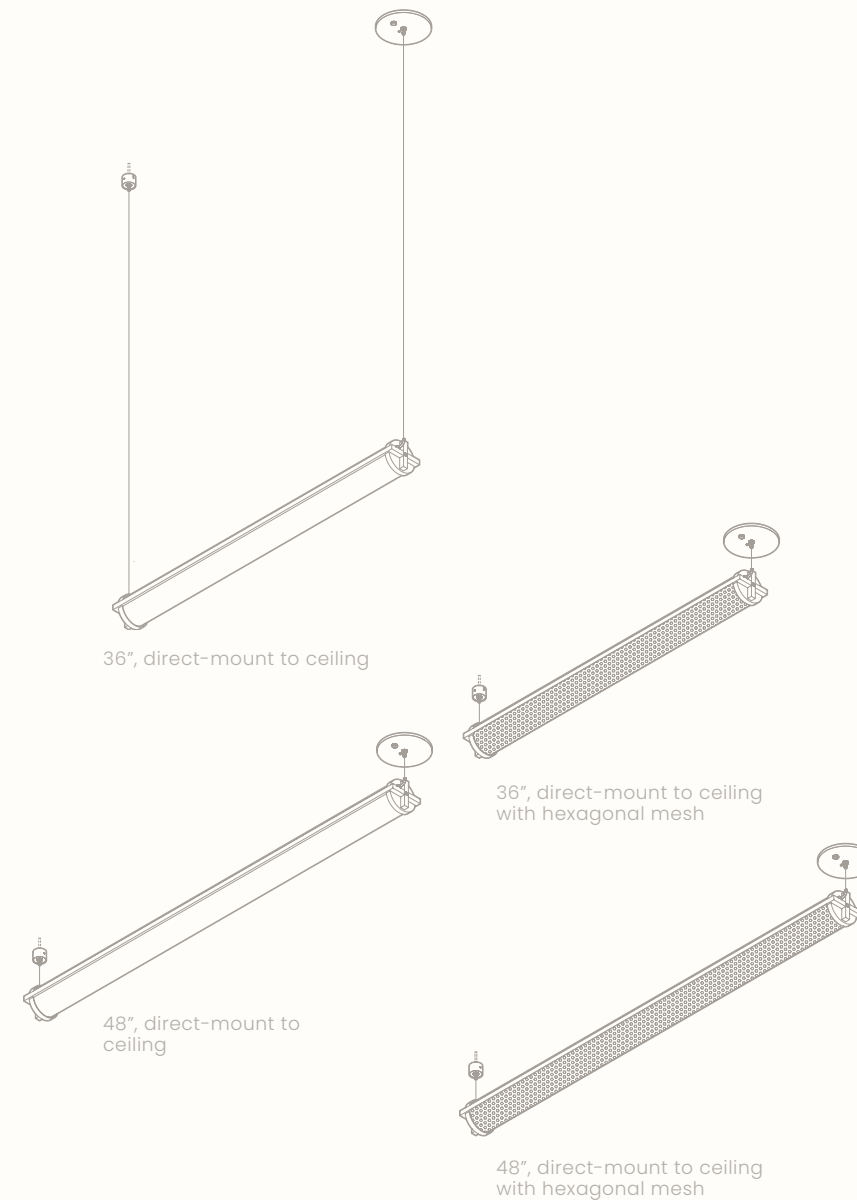

Drop heights can vary.



metropolis suspension, 36",
satin brass, direct-mount



102

METROPOLIS

WALL SCONCE

ADA COMPLIANT

DIMENSIONS
26 In, 36 In, or 48 In Lengths, 3.5 In Ø

WATTAGE & LUMENS
26 In - 41W, 0-4000LM Delivered
36 In - 61W, 0-6100LM Delivered
48 In - 81W, 0-8200LM Delivered

LIGHT TEMPERATURE
2400K, 2700K, 3000K

LIGHT QUALITY
90CRI


MATERIALS
Aluminum, Frosted Acrylic, Blackened Steel

FINISHES
Satin Brass, Satin Aluminum, Polished Aluminum,
Polished Brass, All Black

CERTIFICATIOS
CE, cUL, UL, ADA Compliant

OTHER FEATURES
Black Hexagonal Mesh Available
Direct/Indirect Dimming


MOUNTING
Direct-Mount To Wall

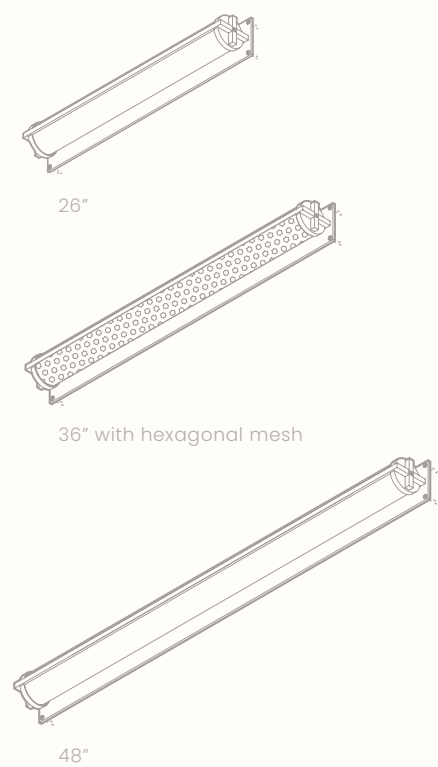

Sconces can be installed vertically or horizontally.



metropolis wall sconce, 48",
polished aluminum with mesh, direct-mount

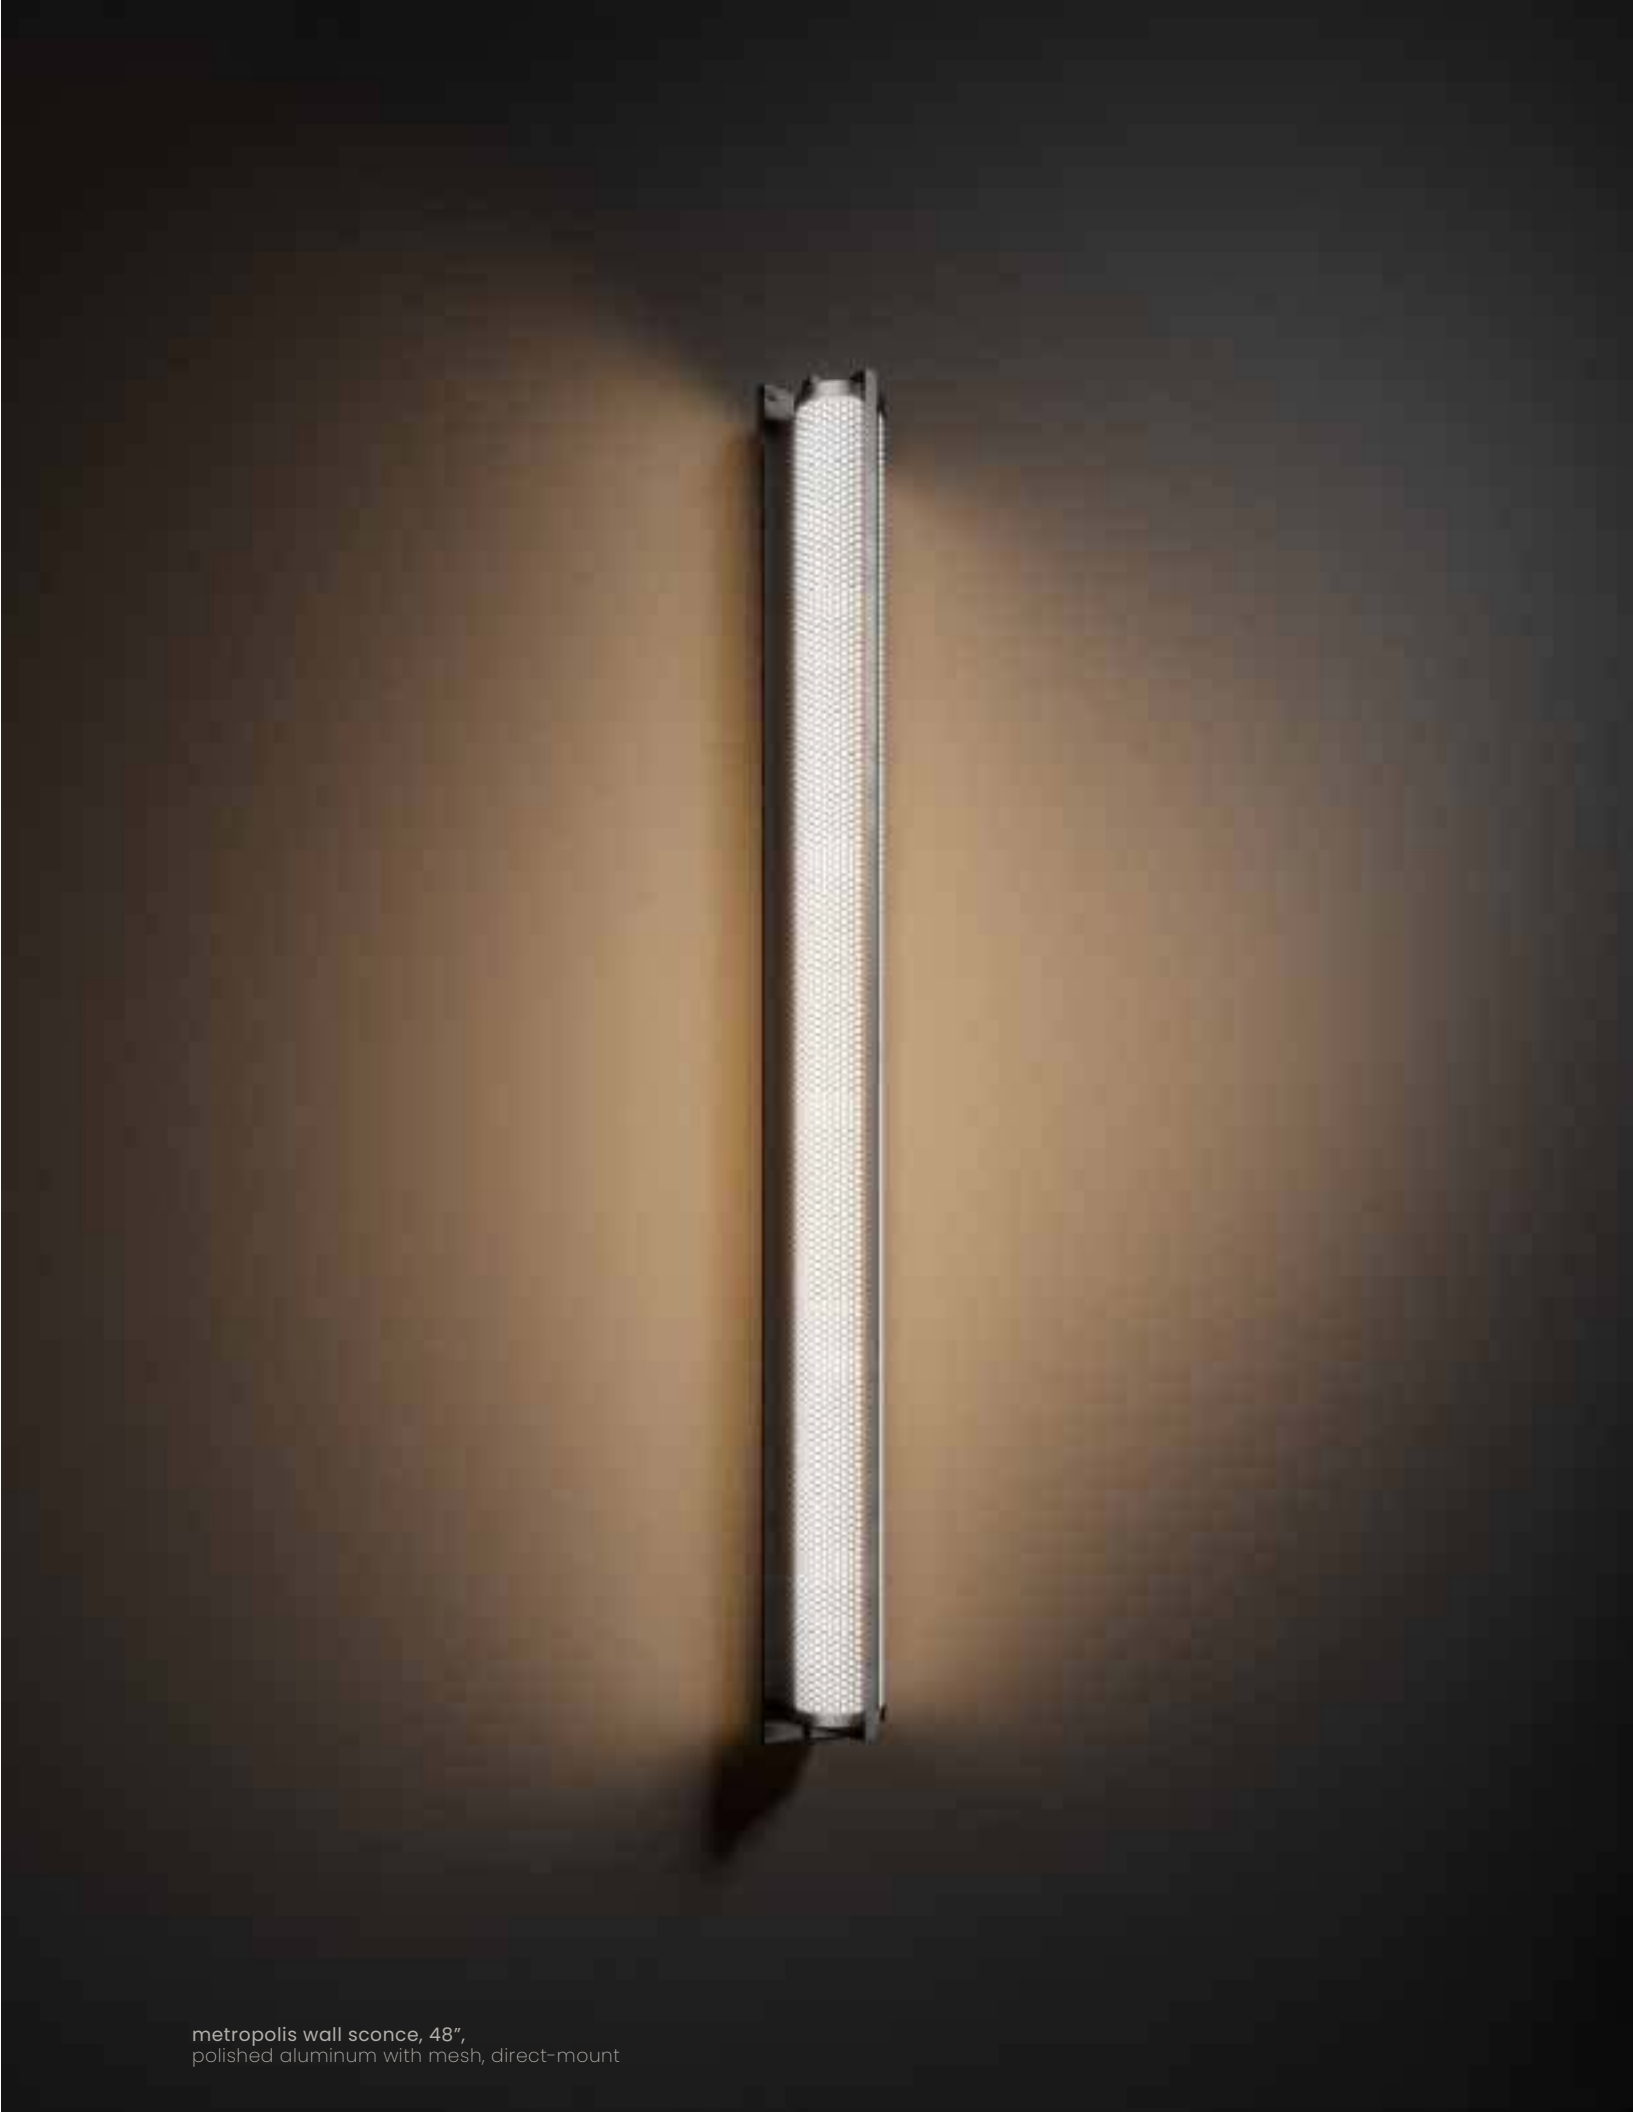

METROPOLIS

WALL-TO-WALL

UL cUL CE FC

DIMENSIONS
26 In or 36 In Modules X 3.5 In Ø Custom Lengths

WATTAGE & LUMENS
26 In - 41W, 0-4000LM Per Module
36 In - 61W, 0-6100LM Per Module

LIGHT TEMPERATURE
2400K, 2700K, 3000K




LIGHT QUALITY
90CRI

MATERIALS
Brass, Aluminum, Frosted Acrylic, Blackened Steel For Mesh

FINISHES
Satin Brass, Satin Aluminum, Polished Aluminum, All Black

CERTIFICATIONS
CE, cUL, UL

MOUNTING
Wall-To-Wall, Suspension, Ceiling-Mount

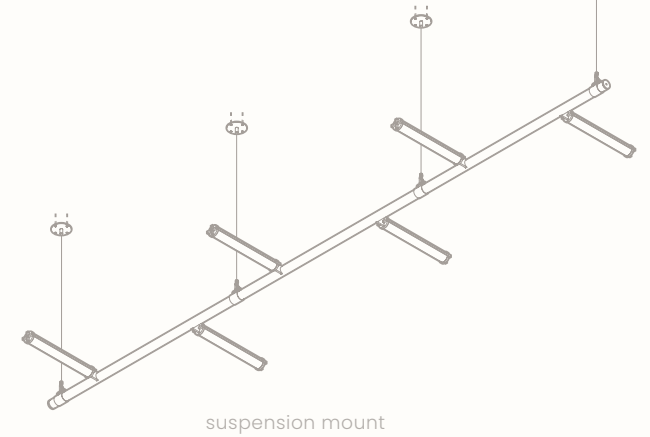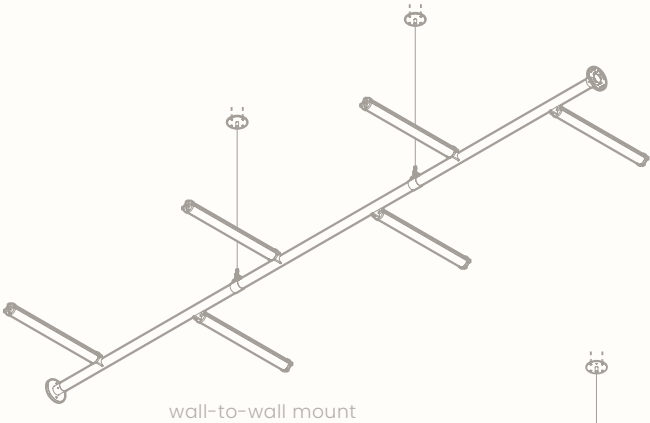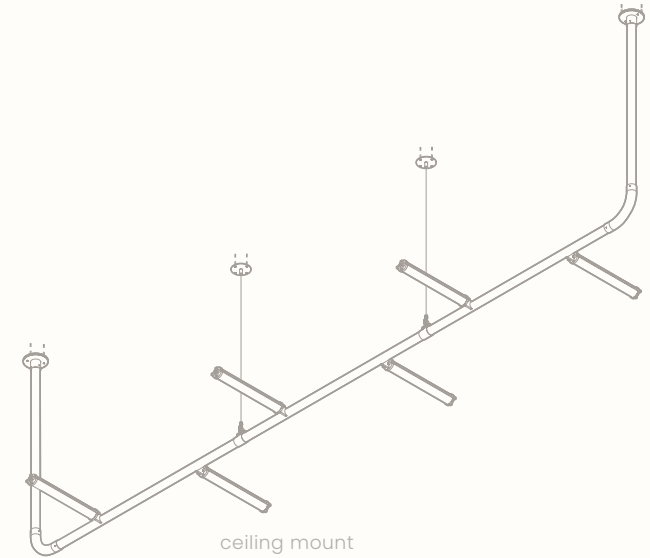

metropolis wall-to-wall, 26" modules,
satin brass, suspension mount







metropolis wall-to-wall, 26" modules, satin
brass with mesh, wall-to-wall mount




metropolis suspension, 36",
all black, direct-mount

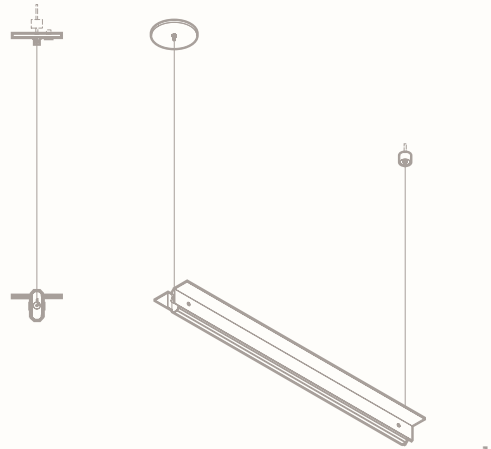

1

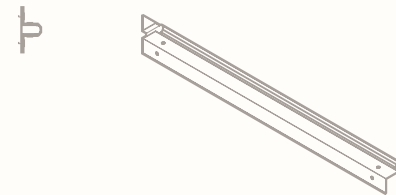

2

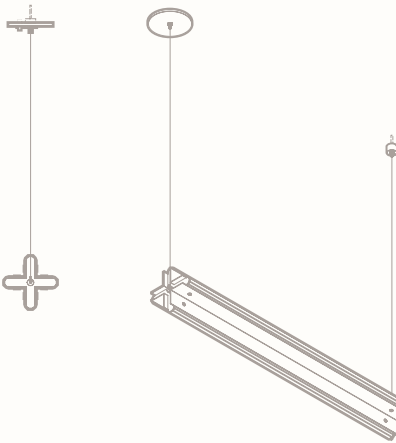

3

AXIS SYSTEM

- AXIS T SUSPENSION 1
- AXIS T WALL SCONCE 2
- AXIS X SUSPENSION 3
- AXIS X VERTICAL SUSPENSION 4



DIMENSIONS
36 In or 48 In Lengths

WATTAGE & LUMENS
36 In - 27.5W, 0-1800LM total
48 In - 37W, 0-2400LM total

LIGHT TEMPERATURE
2700K, 3000K, 3500K, 4000K


LIGHT QUALITY
90CRI

MATERIALS
Bronze, Frosted PMMA

FINISHES
Satin Brass, Polished Brass, Black Oxide, Antique Pewter, Black Walnut, Grey-Stained Ash

CERTIFICATIONS
CE, cUL, UL, Title 24, DAMP Rated

MOUNTING
Direct-Mount To Ceiling,
Direct-Mount To Wall

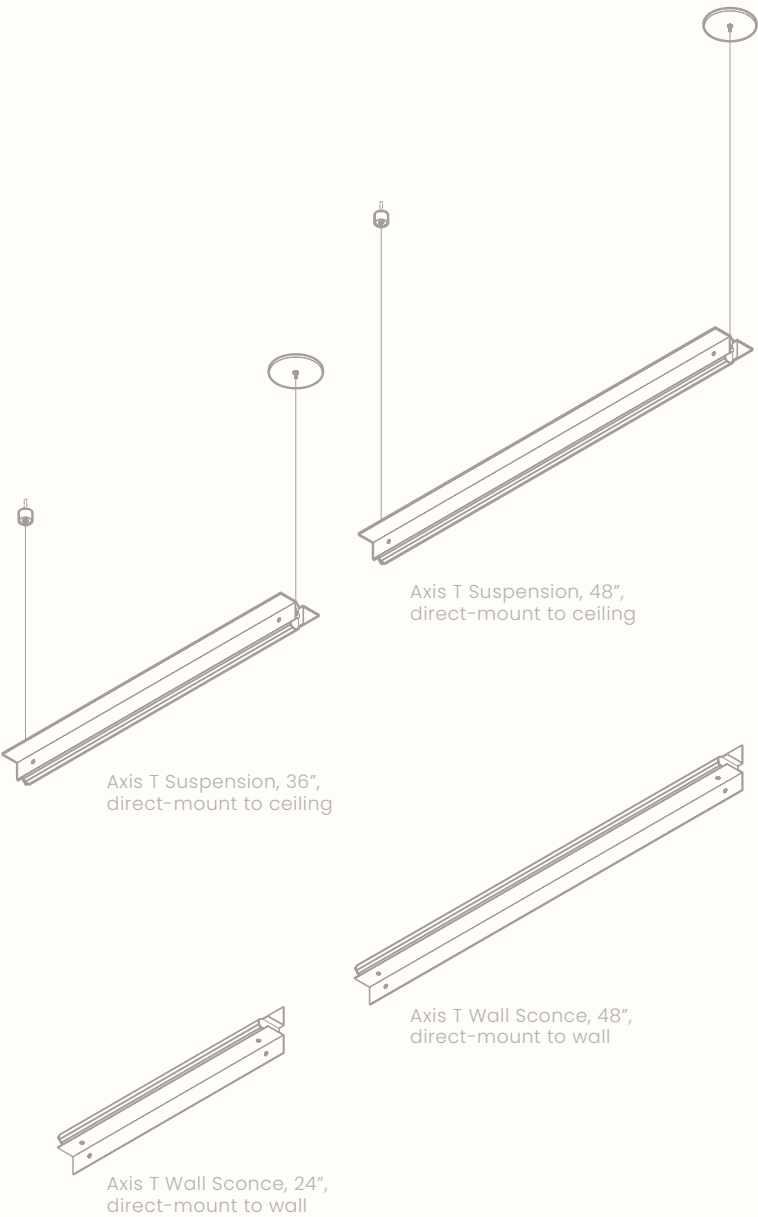

Sconces can be installed vertically or horizontally.



a. axis t suspension, 48",
satin brass, direct-mount
b. axis t wall sconce, 48",
black oxide, direct-mount



AXIS

AXIS X     

DIMENSIONS
36 In or 48 In Lengths, 6 In X 6 In

WATTAGE & LUMENS
36 In - 55W, 0-3700LM total
48 In - 74W, 0-5000LM total

LIGHT TEMPERATURE
2700K, 3000K, 3500K, 4000K


LIGHT QUALITY
90CRI

MATERIALS
Bronze, Frosted PMMA

FINISHES
Satin Brass, Polished Brass, Black Oxide, Antique
Pewter, Black Walnut, Grey-Stained Ash

CERTIFICATIONS
CE, cUL, UL Title 24, DAMP Rated

MOUNTING
Direct-Mount To Ceiling, Direct-Mount to Wall

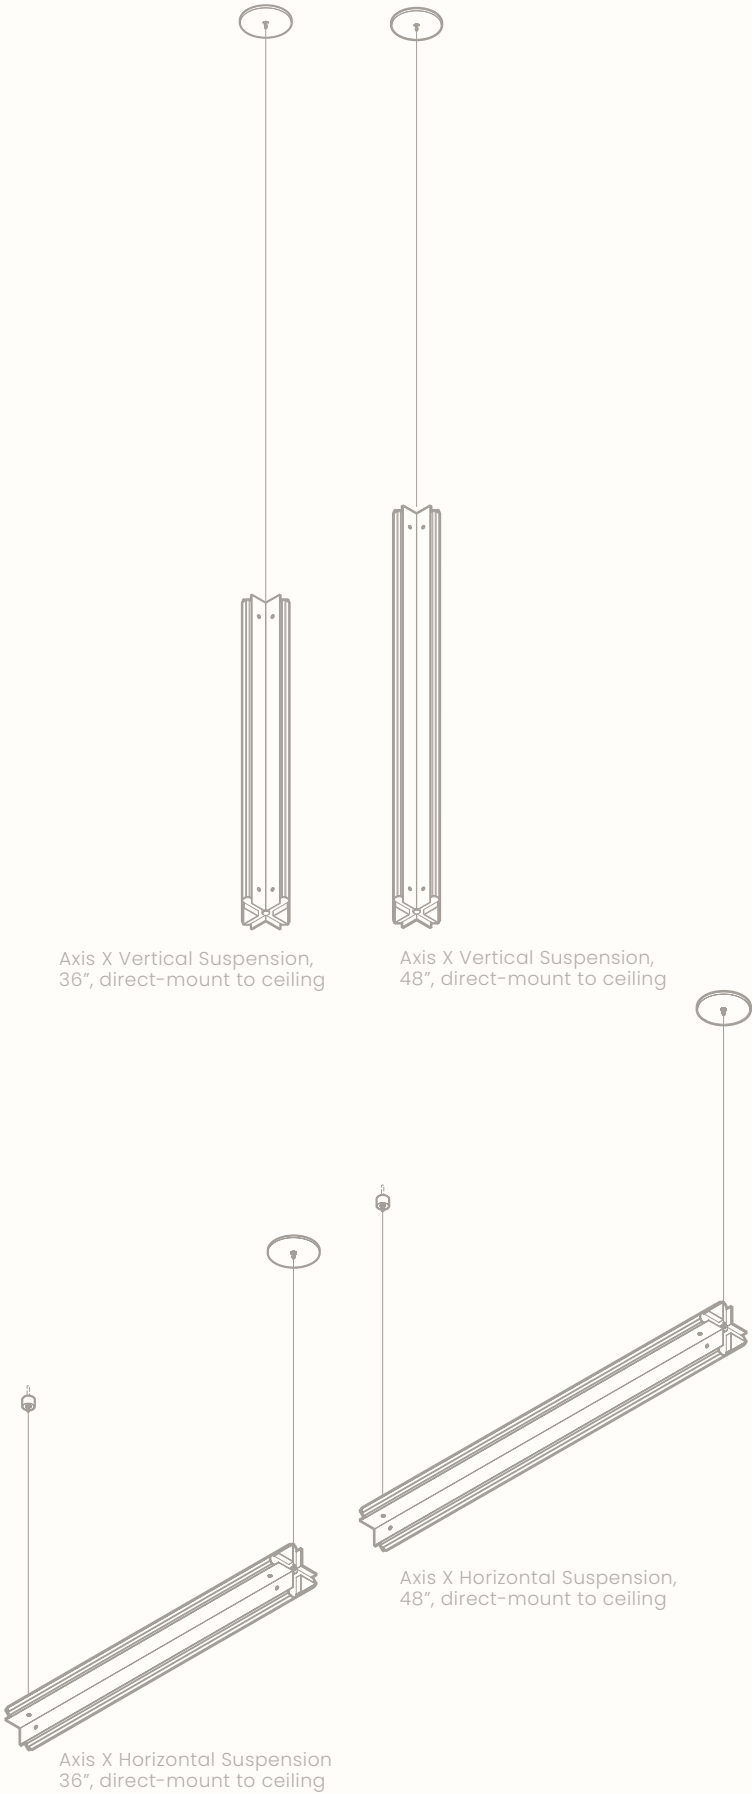

a. axis x horizontal suspension, 36",
polished brass, direct mount


b. axis x vertical suspension, 36",
gre7-stained ash, direct mount



a. axis t suspension, 36",
black oxide, direct-mount




b. axis x horizontal suspension, 36",
polished brass, direct-mount




3



2



1

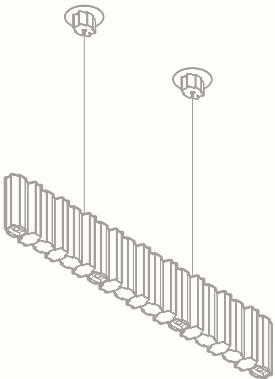

7



6




5




4



11



10



9




8

THE FLUTES SYSTEM

- IONIAN CEILING MOUNT 1
- IONIAN PENDANT 2
- IONIAN ARRAY 3
- LYDIAN WALL SCONCE 4
- LYDIAN CEILING MOUNT 5
- LYDIAN PENDANT 6
- LYDIAN ARRAY 7
- DORIAN WALL SCONCE 8
- DORIAN PENDANT 9
- DORIAN CEILING MOUNT 10
- DORIAN ARRAY 11

THE FLUTES
IONIAN
PENDANT

UL cUL CE

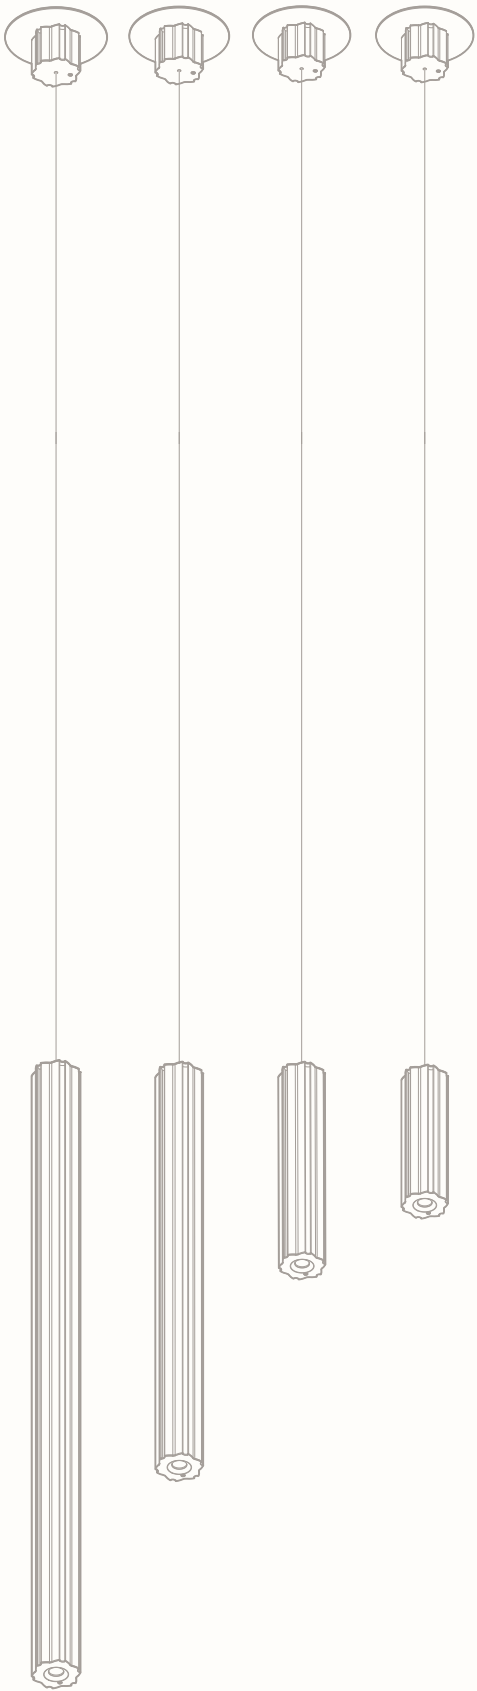

36" 24" 12" 8"

- DIMENSIONS**
8 In, 12 In, 24 In, 36 In
- LIGHT TEMPERATURE**
2700K, 3000K, 3500K, 4000K
- LIGHT QUALITY**
90CRI
- MATERIALS**
Aluminum, PMMA
- FINISHES**
Satin Aluminum, Satin Black
- CERTIFICATIONS**
CE, cUL, UL, Title 24
- MOUNTING**
Direct-Mount To Ceiling

Mounting without cover plate
available.



the flutes ionian pendant 12",
satin black, direct-mount

120

THE FLUTES

IONIAN
CEILING MOUNT

UL cUL CE

DIMENSIONS

8 In, 12 In, 24 In, 36 In

WATTAGE & LUMENS

6W, 0-650LM

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

90CRI

MATERIALS

Aluminum, PMMA

FINISHES


Satin Aluminum, Satin Black

CERTIFICATIONS

CE, cUL, UL, Title 24

MOUNTING

Direct-Mount To Ceiling

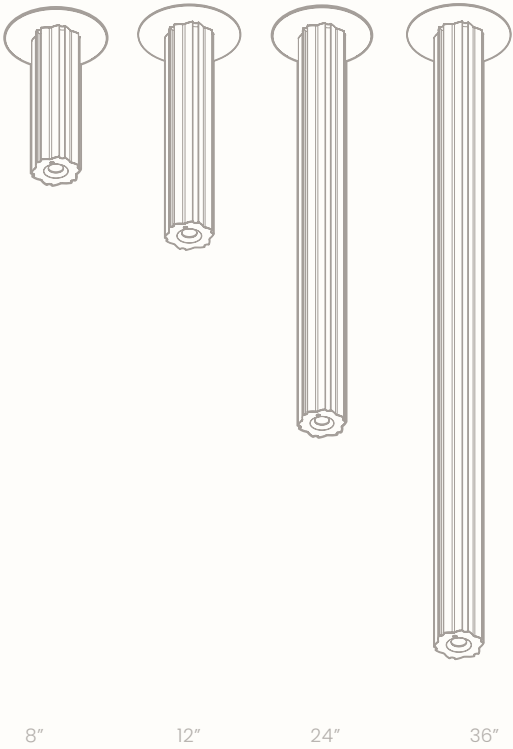

Mounting without cover plate available.



the flutes ionian ceiling-mount 12",
satin black, direct-mount





the flutes ionian chandelier, 4"x24",
satin black, center-mount

THE FLUTES
IONIAN
ARRAY

UL cUL CE

DIMENSIONS

8 In, 12 In, 24 In, 36 In

WATTAGE & LUMENS

6W, 0-650LM Direct Only

12W, 0-1300LM Direct & Indirect

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

90CRI

MATERIALS

Aluminum, PMMA

FINISHES

Satin Aluminum, Satin Black

CERTIFICATIONS

CE, cUL, UL, Title 24

MOUNTING

Center-Mount To Ceiling



4x26", center-mount to ceiling

4x26", center-mount to ceiling



8x36", center-mount to ceiling



8x36", center-mount to ceiling

Mounting without cover plate available.



THE FLUTES
LYDIAN
PENDANT



- DIMENSIONS

8 In, 12 In, 24 In, 36 In
- WATTAGE & LUMENS

6W, 0-650LM Direct Only

12W, 0-1300LM Direct & Indirect
- LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K
- LIGHT QUALITY


90CRI
- MATERIALS

Aluminum, PMMA
- FINISHES

Satin Aluminum, Satin Black
- CERTIFICATIONS

CE, cUL, UL, TITLE 24
- MOUNTING

Direct-Mount To Ceiling

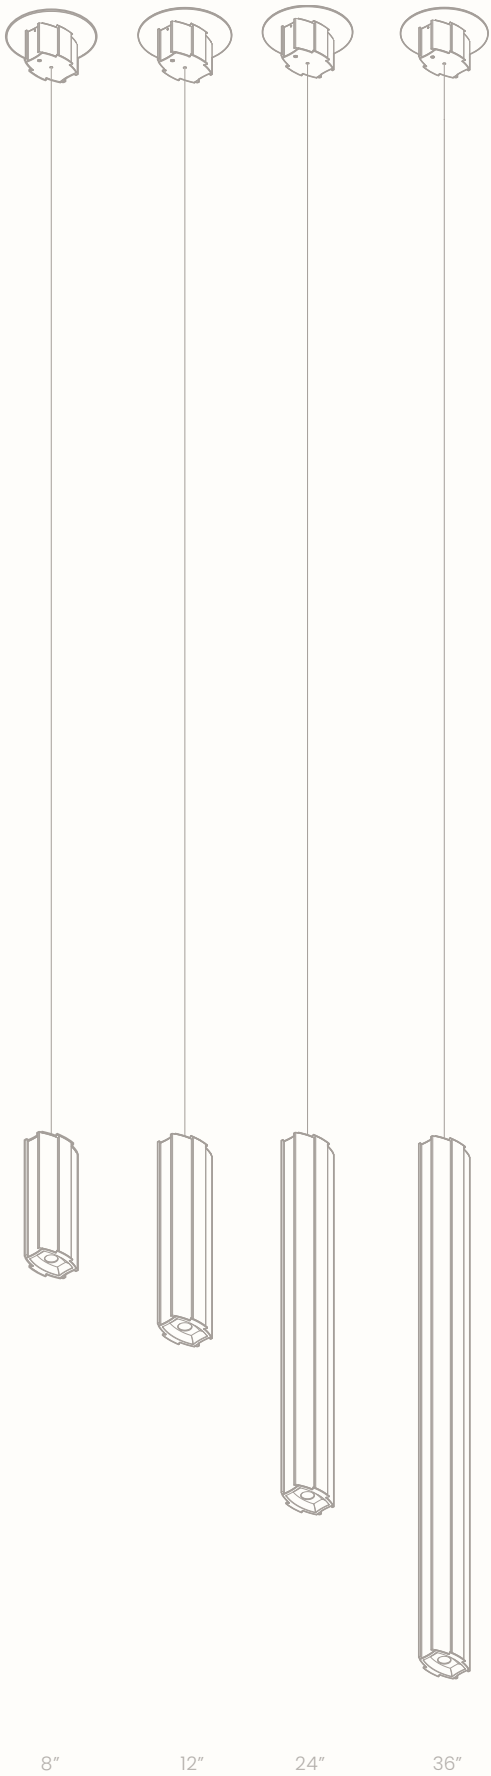

Mounting without cover plate available.



the flutes lydian pendant, 12",
satin black, direct-mount



the flutes lydian ceiling mount, 12",
satin black, direct-mount

THE FLUTES

LYDIAN

CEILING MOUNT



DIMENSIONS

8 In, 12 In, 24 In, 36 In

WATTAGE & LUMENS

6W, 0-650LM Direct Only
12W, 0-1300LM Direct & Indirect

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

90CRI

MATERIALS

Aluminum, PMMA

FINISHES


Satin Aluminum, Satin Black

CERTIFICATIONS

CE, cUL, UL, Title 24

MOUNTING

Direct-Mount To Ceiling

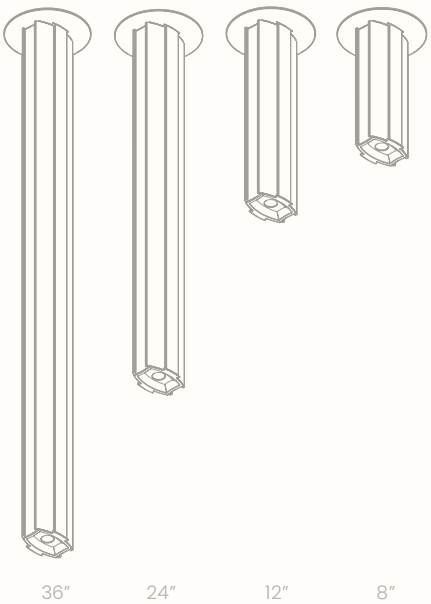

Mounting without cover plate available.



THE FLUTES

LYDIAN

SCONCE



DIMENSIONS
8 In, 12 In, 24 In, 36 In

WATTAGE & LUMENS
6W, 0-650LM Direct Only
12W, 0-1300LM Direct & Indirect

LIGHT TEMPERATURE
2700K, 3000K, 3500K, 4000K


LIGHT QUALITY
90CRI

MATERIALS
Aluminum, PMMA

FINISHES
Satin Aluminum, Satin Black

CERTIFICATIONS
CE, cUL, UL, Title 24

MOUNTING
Direct-Mount To Wall

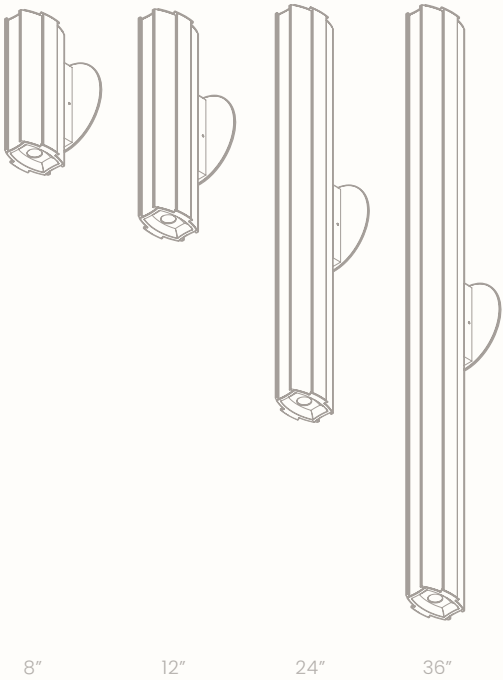

Mounting without cover plate available.



the flutes lydian wall sconce,
12",



THE FLUTES
LYDIAN
ARRAY

UL cUL CE

DIMENSIONS

8 In, 12 In, 24 In, 36 In

WATTAGE & LUMENS

6W, 0-650LM Direct Only

12W, 0-1300LM Direct & Indirect

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

90CRI

MATERIALS

Aluminum, PMMA

FINISHES


Satin Aluminum, Satin Black

CERTIFICATIONS

CE, cUL, UL, Title 24

MOUNTING

Direct-Mount To Ceiling

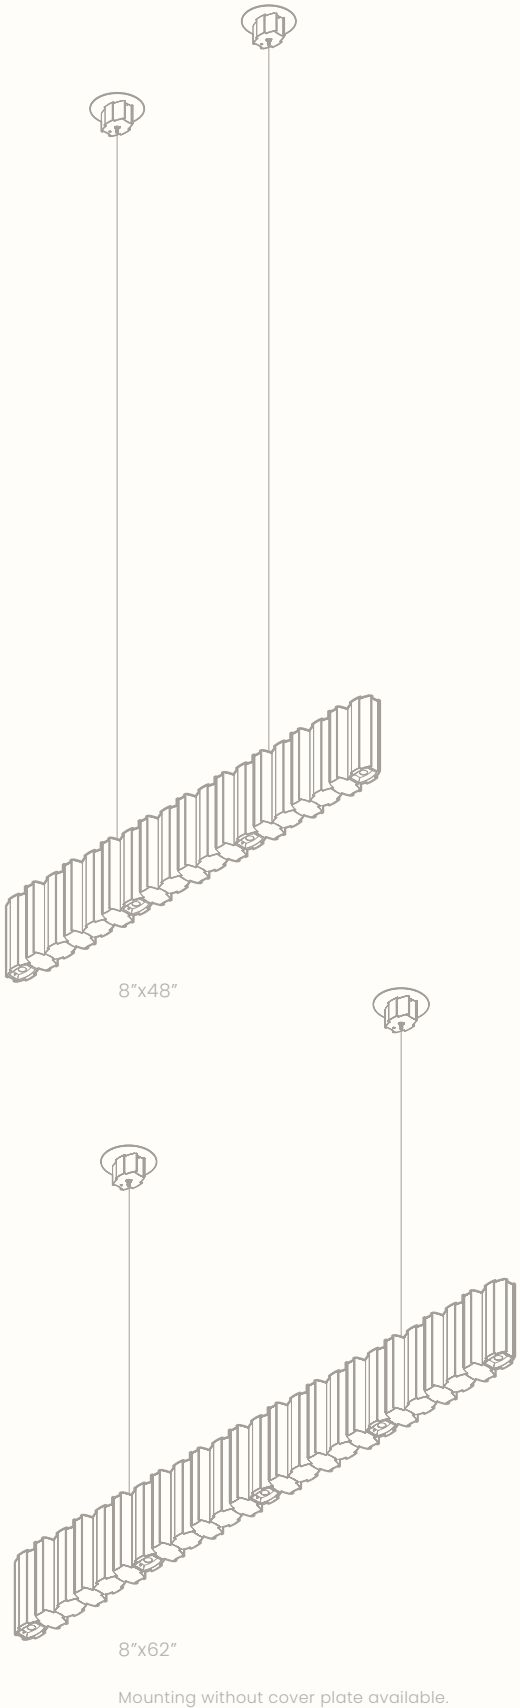

the flutes lydian array,
8x48", satin black, direct-mount



THE FLUTES
DORIAN
PENDANT

UL cUL CE

DIMENSIONS
8 In, 12 In, 24 In, 36 In

WATTAGE & LUMENS
6W, 0-650LM Direct Only
12W, 0-1300LM Direct & Indirect

LIGHT TEMPERATURE
2700K, 3000K, 3500K, 4000K


LIGHT QUALITY
90CRI

MATERIALS
Aluminum, PMMA

FINISHES
Satin Aluminum, Satin Black

CERTIFICATIONS
CE, cUL, UL, Title 24

MOUNTING
Direct-Mount To Ceiling

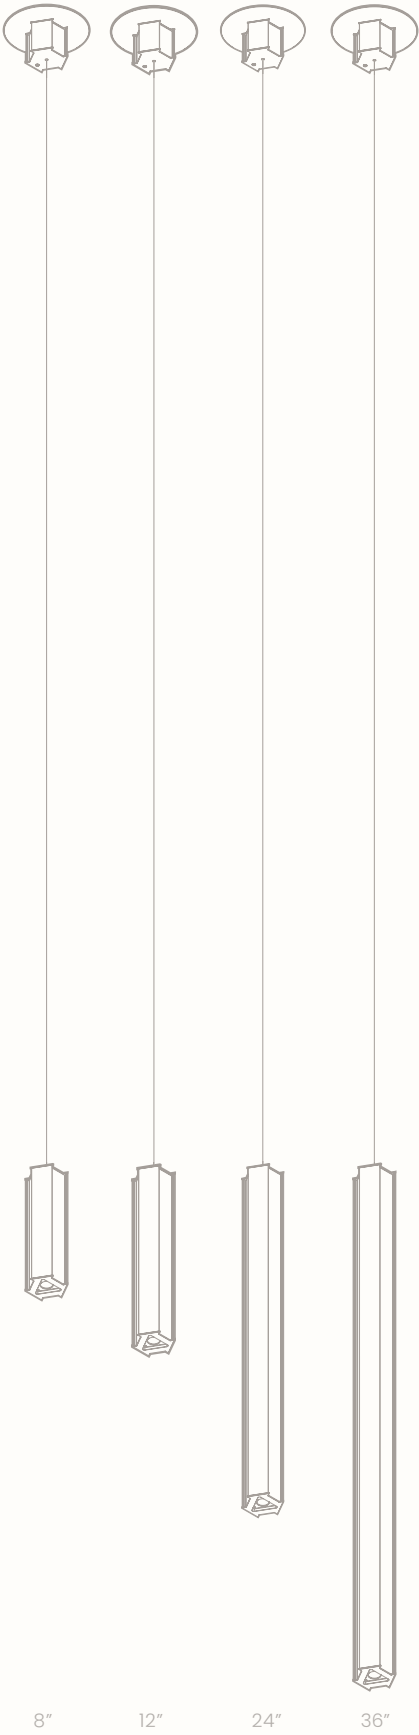

Mounting without cover plate available.

the flutes dorian pendant, 12",
satin black, direct-mount



THE FLUTES
DORIAN
CEILING MOUNT

UL cUL CE

DIMENSIONS
8 In, 12 In, 24 In, 36 In

WATTAGE & LUMENS
6W, 0-650LM Direct Only
12W, 0-1300LM Direct & Indirect

LIGHT TEMPERATURE
2700K, 3000K, 3500K, 4000K


LIGHT QUALITY
90CRI

MATERIALS
Aluminum, PMMA

FINISHES
Satin Aluminum, Satin Black

CERTIFICATIONS
CE, cUL, UL, Title 24

MOUNTING
Direct-Mount To Ceiling

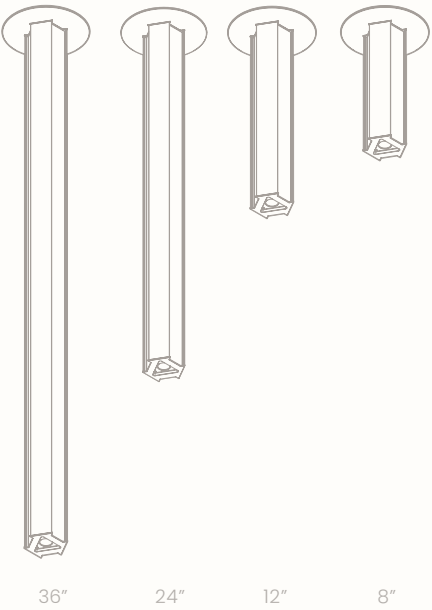

Mounting without cover plate available.

the flutes dorian ceiling mount,12",
satin black, direct-mount



THE FLUTES

DORIAN

SCONCE



DIMENSIONS

8 In, 12 In, 24 In, 36 In

WATTAGE & LUMENS

6W, 0–650LM Direct Only

12W, 0–1300LM Direct & Indirect

LIGHT TEMPERATURE

2700K, 3000K, 3500K, 4000K

LIGHT QUALITY

90CRI

MATERIALS

Aluminum, PMMA

FINISHES


Satin Aluminum, Satin Black

CERTIFICATIONS

CE, cUL, UL, Title 24

MOUNTING

Direct-Mount To Wall

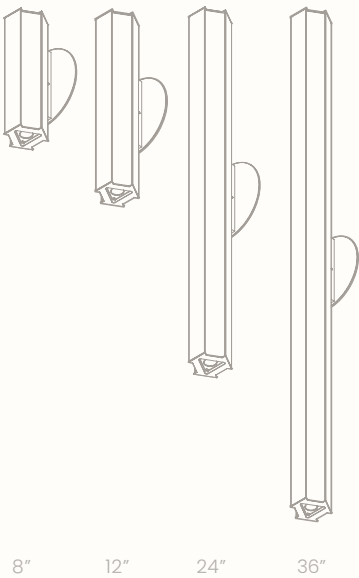

Mounting without cover plate available.



the flutes dorian wall sconce, 12",
satin black, direct-mount



THE FLUTES
DORIAN
ARRAY



DIMENSIONS
8 In or 36 In Lengths, Varying

WATTAGE & LUMENS
3 Light Modules
18W, 0-1950LM

LIGHT TEMPERATURE
2700K, 3000K, 3500K, 4000K


LIGHT QUALITY
90CRI

MATERIALS
Aluminum, PMMA


FINISHES
Satin Aluminum, Satin Black

CERTIFICATIONS
CE, cUL, UL, Title 24

MOUNTING
Direct-Mount To Ceiling

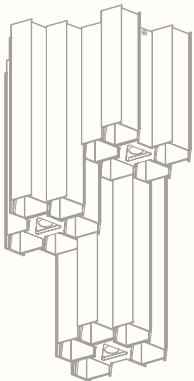

18", direct-mount to ceiling

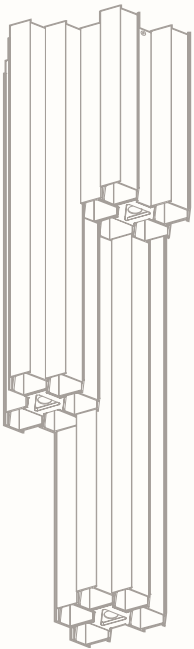

36", direct-mount to ceiling



the flutes dorian array, 36",
satin black, direct-mount





the flutes dorian array, 36",
satin black



the flutes dorian array, 36",
satin aluminum




a.

a. the flutes dorian pendant, 12"
satin black, direct-mount



b.

b. the flutes ionian chandelier, 4x24",
satin black, center-mount

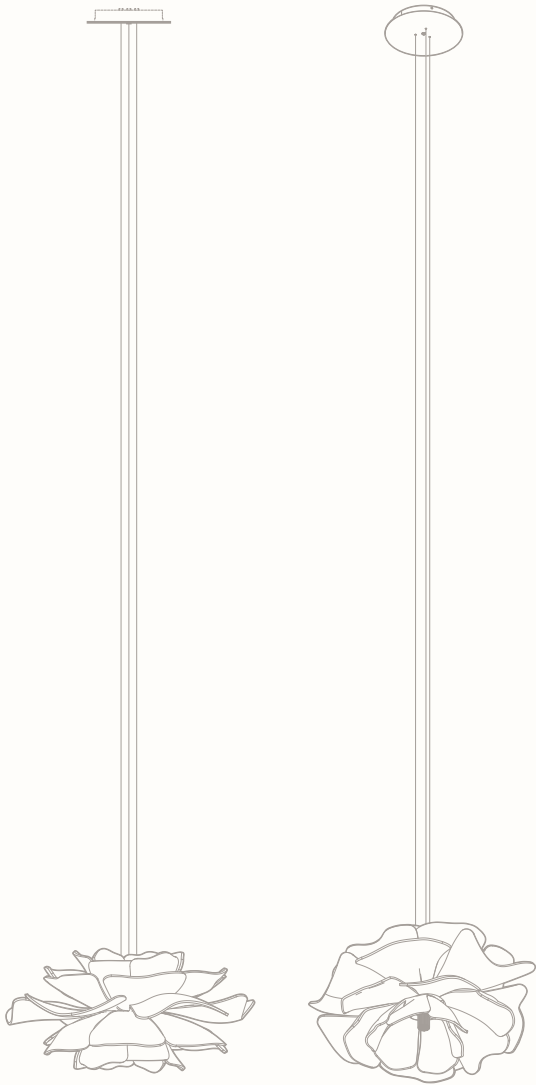

LOVE ME NOT
À LA FOLIE

DIMENSIONS
36 In Ø X 16 In

LUMENS
0-3000LM

LIGHT TEMPERATURE
2700K

LIGHT QUALITY
90CRI

WATTAGE
32W

MATERIALS
Lucite, Aluminum, Copper

FINISHES (HEATSINK)
Black Oxide

CERTIFICATIONS
cUL, UL

MOUNTING
Direct-Mount To Ceiling



36", direct-mount to ceiling

Drop heights can vary.



love me not pendant, direct mount

GROUND CONTROL

GROUND CONTROL POWER OUTLET 1


GROUND CONTROL TOGGLE SWITCH 2

GROUND CONTROL DIMMER KNOB 3


GROUND CONTROL DIMMER DIAL 4

GROUND CONTROL DOUBLE USB PORT 5


GROUND CONTROL DOUBLE USB-C PORT 6




5




2




1



6



3



4


GROUND CONTROL
DIMMER DIAL
DIMMER KNOB

DIMENSIONS
2.5 In Ø X 2 In


COMPATIBILITY
Thin Collection
Metropolis Collection
Axis Collection
Most 12-24V Constant Voltage Lighting

MATERIALS
Brass, ABS


FINISHES
Satin Brass, Black Oxide, Satin Nickel

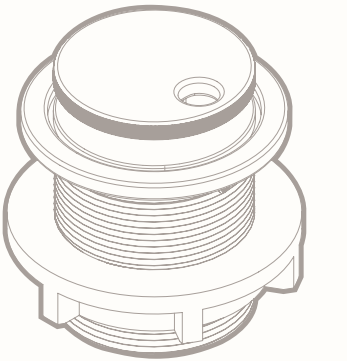

dimmer dial



dimmer knob

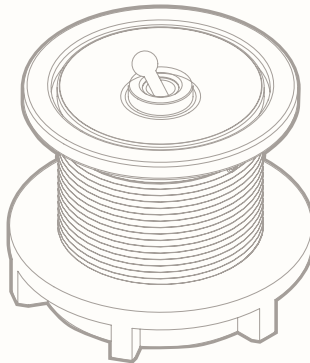

toggle switch

GROUND CONTROL
TOGGLE SWITCH

DIMENSIONS
2.5 In Ø X 2 In

COMPATIBILITY
Thin Collection
Metropolis Collection
Axis Collection
Most 12-24V Constant Voltage Lighting

MATERIALS
Brass, ABS

FINISHES
Satin Brass, Black Oxide, Satin Nickel

MOUNTING
Inset Into Surfaces



a.

b.

c.

a. ground control dimmer dial,
satin brass
b. ground control dimmer knob,
satin brass
c. ground control toggle switch,
satin brass



GROUND CONTROL
POWER OUTLET
DOUBLE USB & USB-C



DIMENSIONS
2.5 In Ø X 2 In

COMPATIBILITY - USB
2.0 Type A

COMPATIBILITY - POWER OUTLET
Nema 5-15 (IEC Plug Type B)


MATERIALS
Brass, ABS

FINISHES
Satin Brass, Black Oxide, Satin Nickel


CERTIFICATIONS - USB
CE

CERTIFICATIONS - POWER OUTLET
cUL, UL


MOUNTING
Inset Into Surfaces

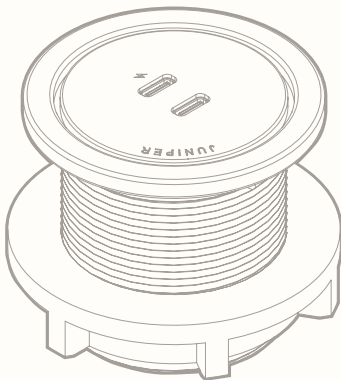

usb-c

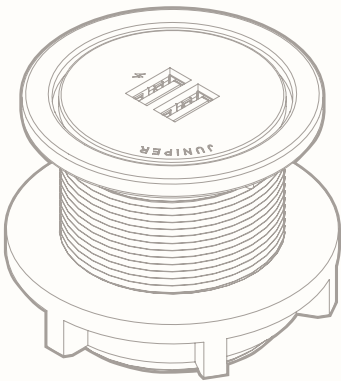

usb

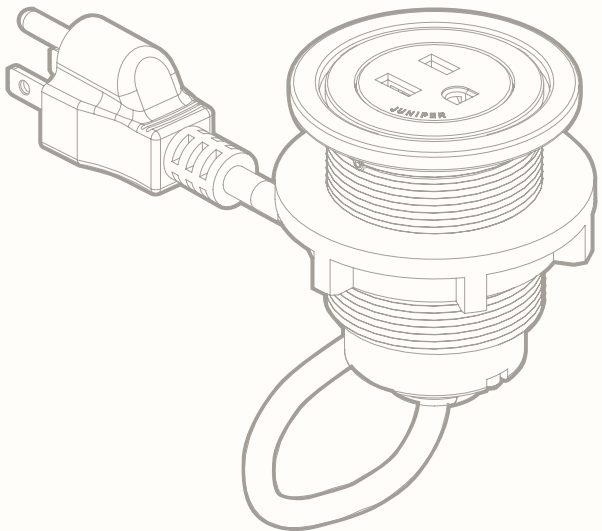

power outlet

a.



b.



c.



- a. ground control power outlet, satin black
- b. ground control double usb-c, satin nickel
- b. ground control double usb, satin brass

a.



b.



c.



- a. ground control double usb-c,
satin nickel
- b. ground control double usb,
satin brass
- c. ground control double usb,
satin brass

COMPONENTS

Juniper offers a variety of components to customize and update fixtures for years to come. All components are precision-machined in solid bass and have been designed to pair with particular fixtures, power supplies, or accommodate specific installation methods.

JUNCTION BOX COVER PLATE 1

AIRCRAFT CABLE GRIPPER 2

LARGE LOCAL CANOPY 3

LOCAL CANOPY 4

THIN TASK LAMP INSET GROMMET 5

THIN TASK LAMP WALL MOUNT 6

CABLE COLLARS 7




THIN LINEAR SUSPENSION

THIN PRIMARIES TRIANGLE

THIN PRIMARIES SQUARE

THIN PRIMARIES RHOMBUS

THIN PRIMARIES HEXAGON



JUNCTION BOX COVER PLATE

The Junction Box Cover Plate simply installs over a junction box for remotely-powered suspended fixtures. The flat metal plate can be used to center-mount fixtures or connect the power-end of a fixture to the ceiling.

LEAD TIME

2-4 Weeks

DIMENSIONS

5 In Diameter x 0.5 In

COMPATIBLE PRODUCTS (BY MOUNTING POINTS)

1 – All Direct-Mount to Ceiling linear suspensions (Axis, Metropolis, THIN System).

Vertical suspensions with a single segment.

THIN Primaries suspensions with Direct-Mount to Ceiling option.

2 – Center-Mount to Canopy single-segment linear fixtures (Axis, Metropolis, THIN System).

3 – THIN Primaries Triangle with Center-Mount to Canopy option.

THIN Vertical Suspension with 3 segments.

THIN linear suspensions with 2 connected sections and Center-Mount to Canopy option.

4 – THIN Primaries Square, Rectangle, or Rhombus with Center-Mount to Canopy option.

THIN Vertical Suspension with 4 segments.



6 – THIN Primaries Hexagon with Center-Mount to Canopy option.

THIN Vertical Suspension with 6 segments.

8 – THIN Primaries Octagon with Center-Mount to Canopy option.

FINISHES

Satin Brass, Black Oxide, Satin Nickel



cover plate, satin brass

LOCAL CANOPY

The Local Ceiling Canopy hosts a brass flat plate with an adjustable collar built to hold a 60W power supply for locally-powered fixtures. The canopy's mesh collar draws heat away from the power supply, adding significant longevity to the fixture.

DIMENSIONS

7 In Diameter x 2 In

COMPATIBLE PRODUCTS

BY # OF MOUNTING POINTS

1 – Direct-Mount to ceiling linear suspensions: Axis, Metropolis, THIN.

Vertical suspensions with a single segment.

THIN Primaries suspensions with Direct-Mount to ceiling option.

2 – Center-mount singlesegment linear fixtures: Axis, Metropolis, THIN.

3 – THIN Primaries Triangle with Center-Mount to Canopy option.

THIN Vertical Suspension with 3 segments.
THIN linear suspensions with 2 connected sections and Center-Mount to Canopy option.

4 – THIN Primaries Square, Rectangle, or Rhombus with Center-Mount to Canopy option.

THIN Vertical Suspension with 4 segments.



6 – THIN Primaries Hexagon with Center-Mount to Canopy option.

THIN Vertical Suspension with 6 segments.

8 – THIN Primaries Octagon with Center-Mount to Canopy option.

FINISHES

Satin Brass, Black Oxide, Satin Nickel



May be included with a locally-powered fixture upon purchase.

local canopy, satin brass

THIN TASK LAMP

INSET GROMMET

The Desk Grommet Base enables a THIN Task Lamp to integrate into a surface. The precision-machined solid brass grommet seamlessly matches THIN Task Lamp and Ground Control Collections to create a desktop hub for lighting and power controls.

DIMENSIONS

2.5 In Diameter x 2.19 In

COMPATIBLE PRODUCTS


THIN T & S Task Lamp

MATERIALS

Solid Brass

FINISHES

Satin Brass, Black Oxide, Satin Nickel



inset grommet, satin brass

THIN TASK LAMP

WALL MOUNT

The THIN Task Lamp Wall Mount Base transitions a THIN Task Lamp from tabletop lighting to a functional wall-mounted fixture. Compatible with models T & S, the wall mount is precision-machined in solid brass to match THIN Task Lamp and Ground Control Collections. This component may be included a THIN Task Lamp upon purchase.

DIMENSIONS

2.25 In x 2 In x 1.25 In

COMPATIBLE PRODUCTS


THIN T & S Task Lamps

MATERIALS

Solid Brass

FINISHES

Satin Brass, Black Oxide, Satin Nickel

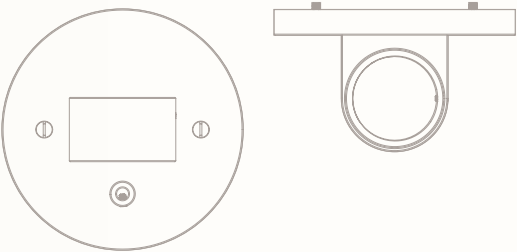

wall mount, satin brass

CABLE COLLAR

THIN SUSPENSION

THIN PRIMARIES

Solid brass Cable Collars offers a minimal solution for collecting aircraft cables and power cords from suspended fixtures into one centralized guide.

DIMENSIONS

- Linear – 3.25 x 0.75 In
- Triangle – 3 In per side
- Square – 3 In per side
- Rhombus – 2.75 In per side
- Hexagon – 2.3 In per side

COMPATIBLE PRODUCTS


- Center-mounted THIN Primaries
- THIN Suspension

MATERIALS

Solid Brass

FINISHES

Satin Brass, Black Oxide, Satin Nickel

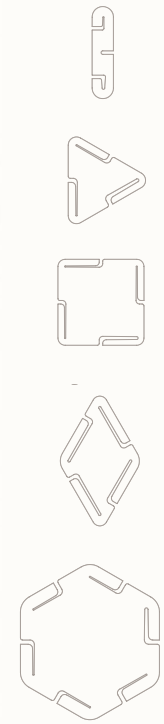

triangle cable collar, satin brass

JUNIPER-DESIGN.COM
+ 1 347 799 2915

FACTORY
157 WATER ST
SOUTHINGTON,
CT 06489

SHOWROOM
1 CROSBY ST
2ND FL., NEW YORK,
NY 10012

