



TECHNICAL | THIN Multiples Dyad (Horizontal)

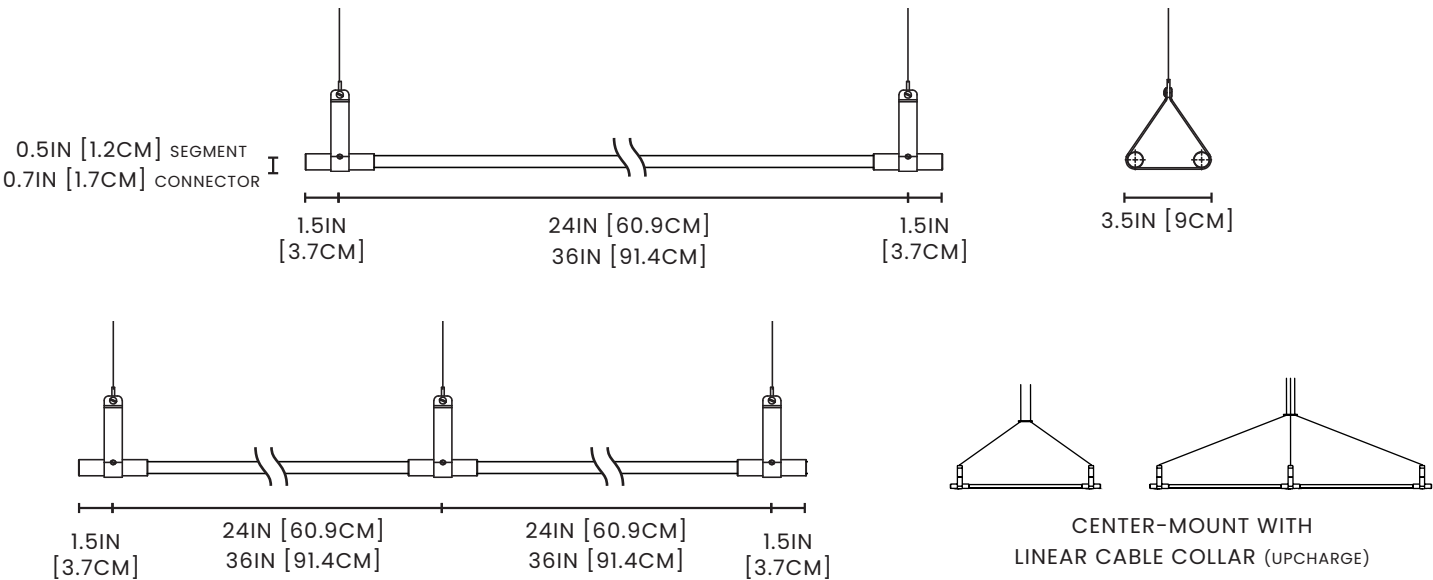

24IN AND 36IN LIGHT SEGMENTS MAY BE COMBINED IN THE SAME FIXTURE
STANDARD MAX LENGTH PER FIXTURE IS (3) 36" LIGHT SEGMENTS 110.8IN [281.5CM]
FOR LONGER RUNS, PLEASE CONTACT US

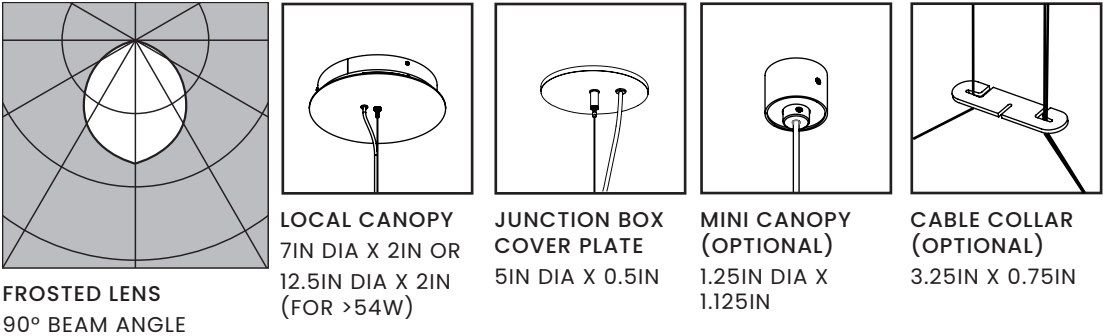

FROSTED LENS
90° BEAM ANGLE

LOCAL CANOPY
7IN DIA X 2IN OR
12.5IN DIA X 2IN
(FOR >54W)

JUNCTION BOX
COVER PLATE
5IN DIA X 0.5IN

MINI CANOPY
(OPTIONAL)
1.25IN DIA X
1.125IN

CABLE COLLAR
(OPTIONAL)
3.25IN X 0.75IN

ILLUMINATION

CRI 95+, R9 90+ standard
2700K, 3000K, 3500K, 4000K options

24" segment 1200LM delivered / 13.6W
36" segment 1840LM delivered / 19.2W
90 LM/W with clear acrylic lens
50,000 hrs LED life L80

POWER

24VDC output Class 2 constant
voltage power supply
120VAC input voltage
Contact Juniper for alternate inputs

FINISHES

Satin Brass, Black Oxide, Satin Nickel

MATERIALS

Solid brass, PMMA

DIMMING

2-Wire/TRIAC/Forward Phase
0-10V
3-Wire
See Power Supply section for details
Contact Juniper for alternate
requirements

MOUNTING

10ft 1/16" aircraft cable, field
adjustable
16ft Clear-jacketed 22AWG co-axial
silver cord, field adjustable
Direct-mounting and center-
mounting with Linear Cable Collar
options available (for up to 2
connected segments)

SYSTEM RUN

Limited by power supply wattage only

BUILD A SPECIFICATION | THIN Multiples Dyad (Horizontal)

| SERIES | FINISH | CONFIGURATION | SEGMENTS | COLOR TEMP | MOUNTING |
|----------|--------|---------------|----------|------------|----------|
| JPR-THES | - 0 | - M D H | - | - F | - |

LENS
POWER SUPPLY

SAMPLE SKU: JPR-THES-01-MDH-022-30-C-R-CC
Satin Brass, (2) 24" segments, 3000K, clear lens, remote power
supply, center-mount with Linear Cable Collar

CODE DEFINITIONS

FINISHES



SEGMENTS

- 0 no segment
- 2 24 inch segment - 1200LM delivered / 13.6W
- 3 36 inch segment - 1840LM delivered / 19.2W

Each digit represents a single segment, e.g. 000023 is (1)
24" segment and (1) 36" segment. Contact Juniper for
custom segment lengths.

COLOR TEMPERATURE

- 27 2700K
- 30 3000K
- 35 3500K
- 40 4000K

LENS

- C Clear - 40° beam angle
- F Frosted - 90° beam angle

MOUNTING

- CX Center-Mount to Canopy without Cable Collar
Includes corresponding canopy
- CC Center-Mount to Canopy with Cable Collar (upcharge)
Includes corresponding canopy
- DM Direct-Mount to Junction Box (Local or Remote)
Includes corresponding canopy for a single power
cord with ceiling grippers for other mounting points
- MM 2" Mini Mount | Direct-Mount to Ceiling (Remote Only)
Includes corresponding canopy for a single power
cord with ceiling grippers for other mounting points

POWER SUPPLY OPTIONS

R. REMOTE

STANDARD 120-277V INPUT - 2-WIRE/TRIAC/FORWARD
PHASE/ELV

STANDARD 120-277V INPUT - 0-10V

LUTRON 120V INPUT - TRIAC DIMMING (40W) (UPCHARGE)

LUTRON 120-277V INPUT - 3-WIRE (UPCHARGE)

L. LOCAL

STANDARD 120-277V INPUT - TRIAC/0-10V/ELV DIMMING

Our team will determine correct wattages for power supplies
based on chosen configuration. Contact Juniper for custom
requirements or further power supply specifications.

| | |
|---------|------|
| Project | Type |
| Notes | |