

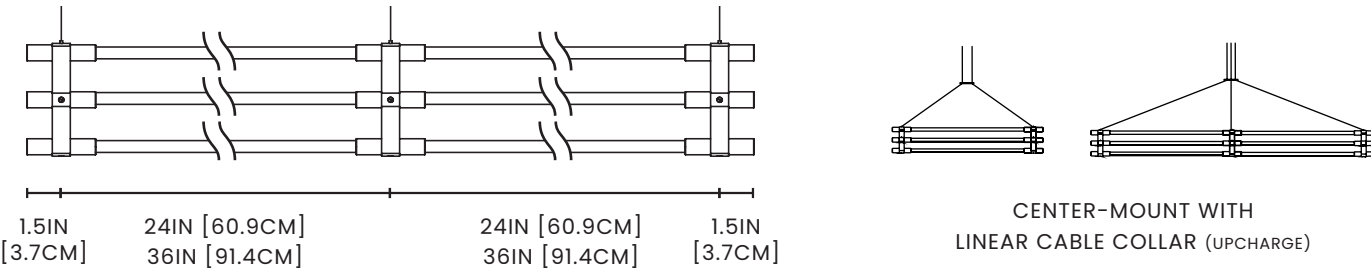



TECHNICAL | THIN Multiples Tetrad

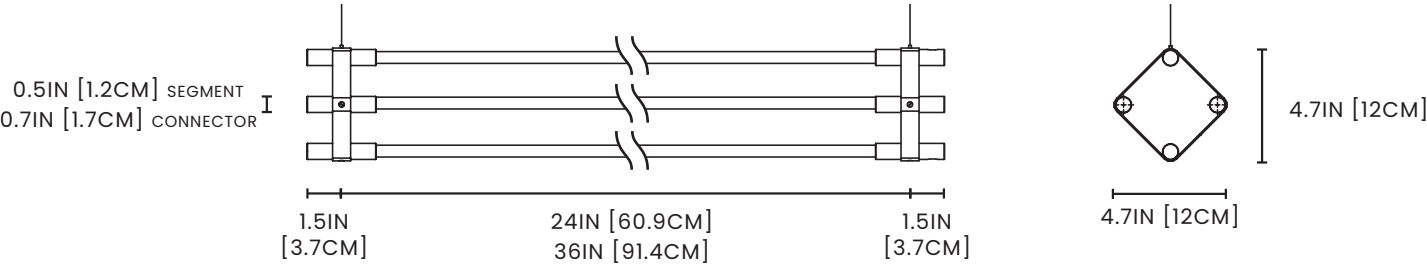


24IN AND 36IN LIGHT SEGMENTS MAY BE COMBINED IN THE SAME FIXTURE.
STANDARD MAX LENGTH PER FIXTURE IS (2) 36" LIGHT SEGMENTS 75IN [190.5CM]
FOR LONGER RUNS, PLEASE CONTACT US




FROSTED LENS
90° BEAM ANGLE




LOCAL CANOPY
7IN DIA X 2IN OR
12.5IN DIA X 2IN
(FOR >54W)



JUNCTION BOX
COVER PLATE
5IN DIA X 0.5IN



MINI CANOPY
(OPTIONAL)
1.25IN DIA X
1.125IN



CABLE COLLAR
(OPTIONAL)
3.25IN X 0.75IN

ILLUMINATION

CRI 95+, R9 90+ standard
2700K, 3000K, 3500K, 4000K options

24" segment 2400LM delivered/27.2W
36" segment 3680LM delivered/38.4W
90 LM/W
50,000 hrs LED life L80

POWER

24VDC output Class 2 constant
voltage power supply
120VAC input voltage
Contact Juniper for alternate inputs

FINISHES

Satin Brass, Black Oxide, Satin Nickel

MATERIALS

Solid brass, PMMA

DIMMING

2-Wire/TRIAC/Forward Phase
0-10V
3-Wire
See Power Supply section for details
Contact Juniper for alternate
requirements

MOUNTING

10ft 1/16" aircraft cable, field
adjustable
16ft Clear-jacketed 22AWG co-axial
silver cord, field adjustable
Direct-mounting and center-
mounting with Linear Cable Collar
options available (for up to 2
connected segments)

SYSTEM RUN

Limited by power supply wattage only

BUILD A SPECIFICATION | THIN Multiples Tetrad

SERIES	FINISH	CONFIGURATION	SEGMENTS	COLOR TEMP	MOUNTING
JPR-THES	- 0	- M T E		- F	

LENS
POWER SUPPLY

SAMPLE SKU: JPR-THES-01-MTE-003-30-F-R-DM
Satin Brass, (1) 36" segment, 3000K, frosted lens, remote power supply,
direct-mount to ceiling

CODE DEFINITIONS

FINISHES



01 Satin Brass 02 Black Oxide 03 Satin Nickel 40 Bronze

SEGMENTS

- 0 no segment
- 2 24 inch segment - 2400LM delivered / 27.2W
- 3 36 inch segment - 3680LM delivered / 38.4W

Each digit represents a single segment, e.g. 000023 is (1)
24" segment and (1) 36" segment. Contact Juniper for
custom segment lengths.

COLOR TEMPERATURE

- 27 2700K
- 30 3000K
- 35 3500K
- 40 4000K

LENS

F Frosted - 90° beam angle

MOUNTING

- CX Center-Mount to Canopy without Cable Collar
Includes corresponding canopy
- CC Center-Mount to Canopy with Cable Collar (upcharge)
Includes corresponding canopy
- DM Direct-Mount to Junction Box (Local or Remote)
Includes corresponding canopy for a single power
cord with ceiling grippers for other mounting points
- MM 2" Mini Mount | Direct-Mount to Ceiling (Remote Only)
Includes corresponding canopy for a single power
cord with ceiling grippers for other mounting points

POWER SUPPLY OPTIONS

R. REMOTE

STANDARD 120-277V INPUT - 2-WIRE/TRIAC/FORWARD
PHASE/ELV

STANDARD 120-277V INPUT - 0-10V

LUTRON 120V INPUT - TRIAC DIMMING (40W) (UPCHARGE)

LUTRON 120-277V INPUT - 3-WIRE (UPCHARGE)

L. LOCAL

STANDARD 120-277V INPUT - TRIAC/0-10V/ELV DIMMING

Our team will determine correct wattages for power supplies
based on chosen configuration. Contact Juniper for custom
requirements or further power supply specifications.

Project	Type
Notes	