

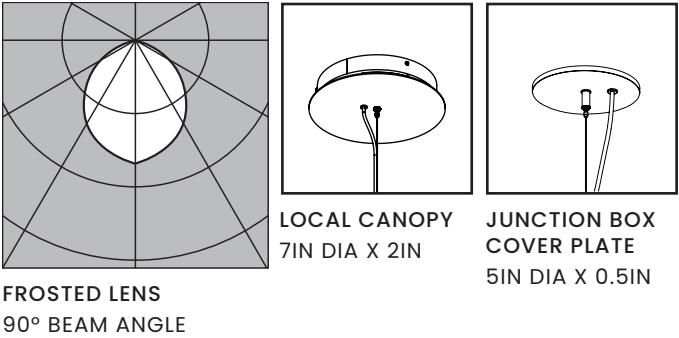


TECHNICAL | THIN Multiples Vertical Suspension Triad

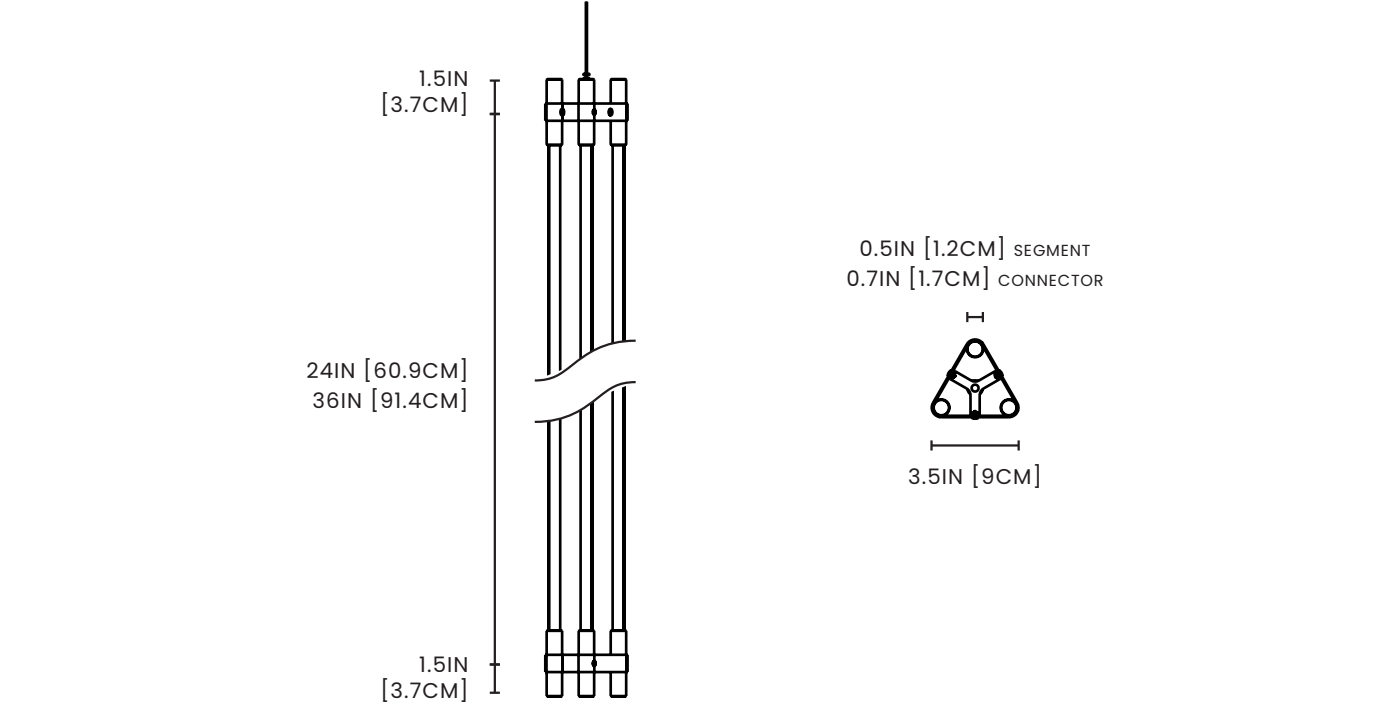

ILLUMINATION CRI 95+, R9 90+ standard 2700K, 3000K, 3500K, 4000K options 24" segment 1800LM delivered / 20.4W 36" segment 2760LM delivered / 28.8W 90LM/W 50,000 hrs LED life L80	FINISHES Satin Brass, Black Oxide, Satin Nickel MATERIALS Solid brass, PMMA DIMMING 2-Wire/TRIAC/Forward Phase 0-10V 3-Wire See Power Supply section for details Contact Juniper for alternate requirements	MOUNTING 10ft 1/16" aircraft cable, field adjustable 16ft Clear-jacketed 22AWG co-axial silver cord, field adjustable SYSTEM RUN Limited to one section per fixture
POWER 24VDC output Class 2 constant voltage power supply 120VAC input voltage Contact Juniper for alternate inputs		

BUILD A SPECIFICATION | THIN Multiples Vertical Suspension Triad

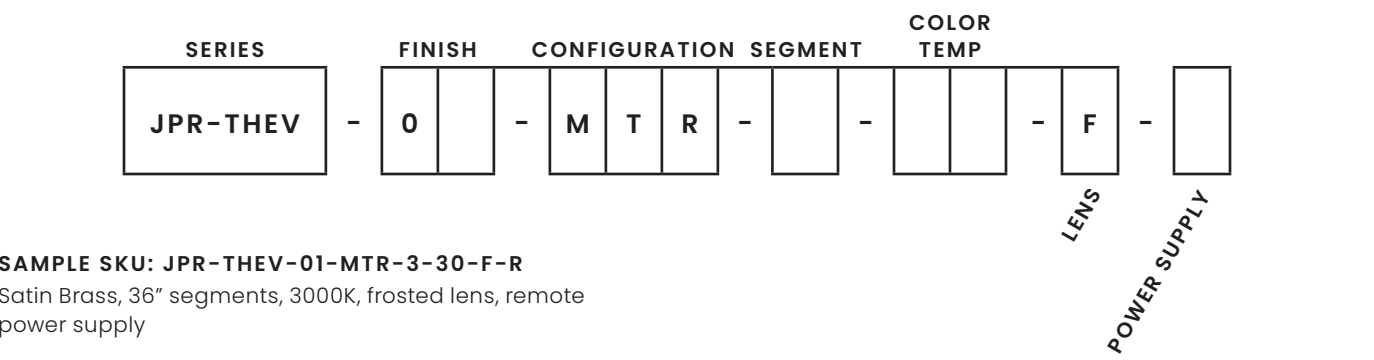

SAMPLE SKU: JPR-THEV-01-MTR-3-30-F-R
Satin Brass, 36" segments, 3000K, frosted lens, remote power supply

CODE DEFINITIONS

FINISHES



SEGMENTS

2 24 inch segment - 1800LM delivered / 20.4W
3 36 inch segment - 2760LM delivered / 28.8W

Note: the chosen digit will reflect the length of all segments in this fixture. e.g. 2 represents all segments as 24 inches.
Contact Juniper for custom segment lengths

COLOR TEMPERATURE

27 2700K
30 3000K
35 3500K
40 4000K

LENS

F Frosted - 90° beam angle

POWER SUPPLY OPTIONS

R. REMOTE

STANDARD 120-277V INPUT - 2-WIRE/TRIAC/FORWARD PHASE/ELV

STANDARD 120-277V INPUT - 0-10V

LUTRON 120V INPUT - TRIAC DIMMING (40W) (UPCHARGE)

LUTRON 120-277V INPUT - 3-WIRE (UPCHARGE)

L. LOCAL

STANDARD 120-277V INPUT - TRIAC/0-10V/ELV DIMMING

Our team will determine correct wattages for power supplies based on chosen configuration. Contact Juniper for custom requirements or further power supply specifications.

Project	Type
Notes	