



## TECHNICAL | THIN Primaries Hexagon Surface Mount



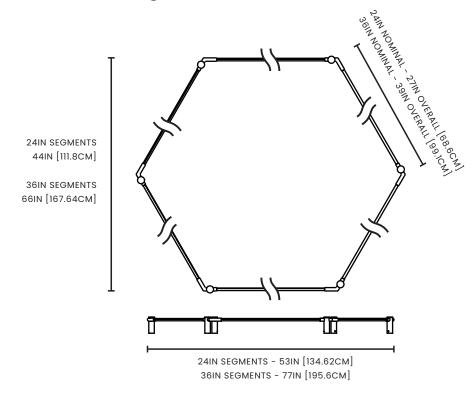



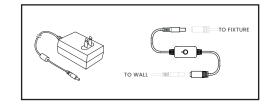

OPTIONAL PLUG-IN POWER SUPPLY WITH IN-LINE TOUCH DIMMER & 3-METER CORD

#### FROSTED LENS 90° BEAM ANGLE

#### ILLUMINATION

CRI 95+, R9 90+ standard 2700K, 3000K, 3500K, 4000K options

24" segment 3600LM delivered/40.8W **36" segment** 5500LM delivered/57.6W 90LM/W 50,000 hrs LED life L80

#### POWER

24VDC output Class 2 constant voltage power supply 120VAC input voltage Contact Juniper for alternate inputs

Designed by Peter Bristol & Juniper

#### **FINISHES**

Satin Brass, Black Oxide, Satin Nickel

#### **MATERIALS**

Solid brass, PMMA

#### DIMMING

2-Wire/TRIAC/Forward Phase 0-10V

See Power Supply section for details Contact Juniper for alternate requirements

#### MOUNTING


Wall brackets mount directly to 2 X 18AWG in-wall rated cable

recommended for remote installation (provided by electrician)

36

#### (4) (4) ( € FC \DAMP RATED \Land ADA COMPLIANT

## BUILD A SPECIFICATION | THIN Primaries Hexagon Surface Mount

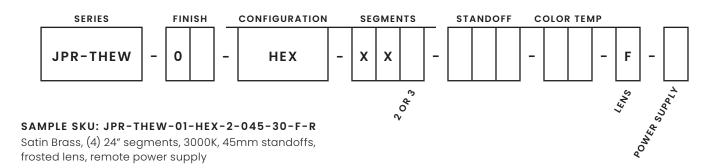

#### **CODE DEFINITIONS**

# FINISHES

**01** Satin Brass

02 Black Oxide 03 Satin Nickel

40 Bronze

#### SEGMENTS

2 24 inch - 3600LM delivered / 40.8W 3 36 inch - 5500LM delivered / 57.6W

Contact Juniper for custom segment lengths

#### STANDOFF LENGTH

045 45mm Standoffs

**090** 90mm Standoffs

180 180mm Standoffs

### **COLOR TEMPERATURE**

**27** 2700K

**30** 3000K

**35** 3500K

**40** 4000K

#### LENS

F Frosted - 90° beam angle

#### **POWER SUPPLY OPTIONS**

#### R. REMOTE

STANDARD 120-277V INPUT - 2-WIRE/TRIAC/FORWARD PHASE/ELV

STANDARD 120-277V INPUT - 0-10V

LUTRON 120-277V INPUT - 3-WIRE (UPCHARGE)

#### P. PLUG-IN

24VDC, 1.67A POWER SUPPLY

Our team will determine correct wattages for power supplies based on chosen configuration. Contact Juniper for custom requirements or further power supply specifications.

Project	Туре
Notes	

WWW.JUNIPER-DESIGN.COM INFO@JUNIPER-DESIGN.COM +1 347-799-2915 | 157 WATER STREET SOUTHINGTON, CT 06489