
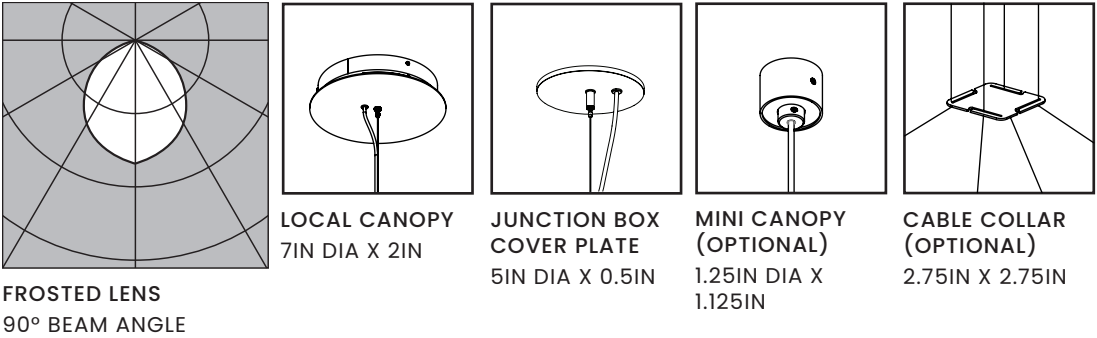


TECHNICAL | THIN Primaries Rhombus Suspension

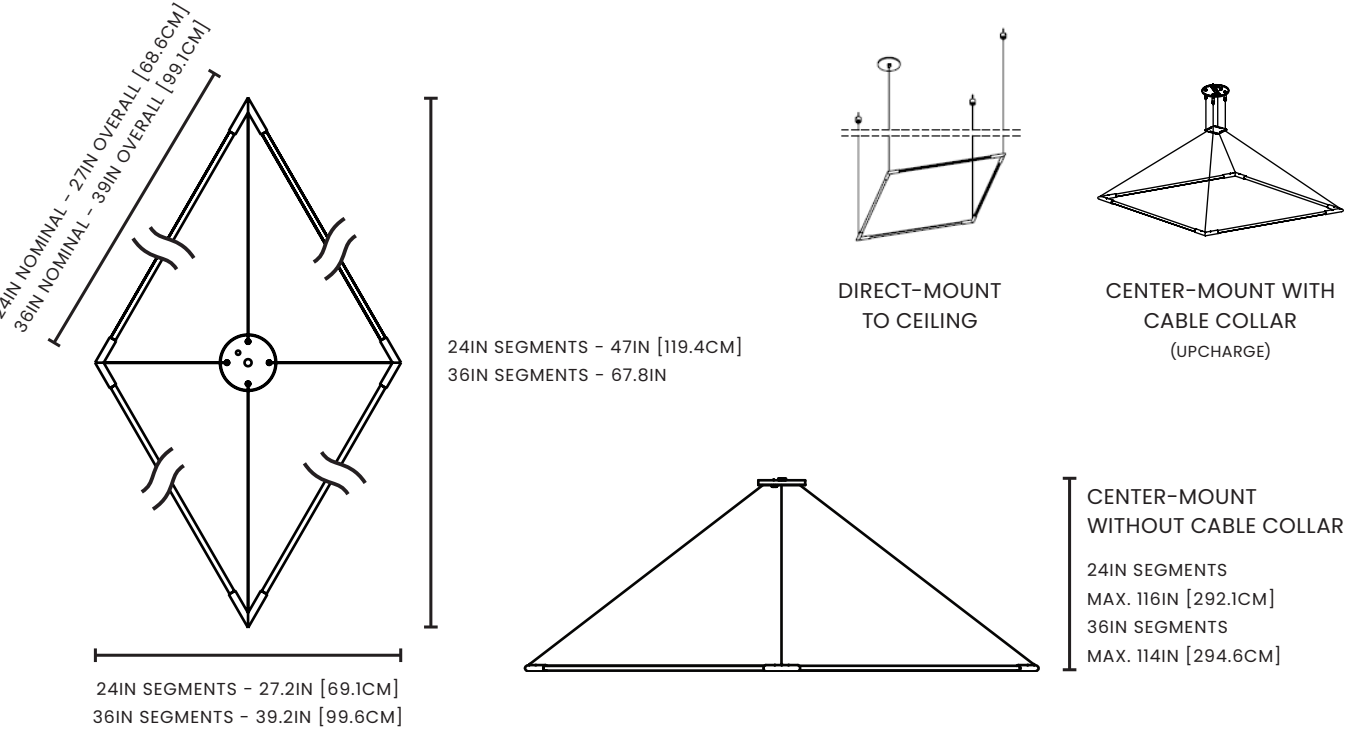

ILLUMINATION CRI 95+, R9 90+ standard 2700K, 3000K, 3500K, 4000K options 24" segment 2400LM delivered/27.2W 36" segment 3680LM delivered/38.4W 90LM/W 50,000 hrs LED life L80	FINISHES Satin Brass, Black Oxide, Satin Nickel MATERIALS Solid brass, PMMA DIMMING 2-Wire/TRIAC/Forward Phase 0-10V 3-Wire See Power Supply section for details Contact Juniper for alternate requirements	MOUNTING (x4) 1/16" aircraft cables, field adjustable 16ft Clear-jacketed 22AWG co-axial silver cord, field adjustable Direct-mounting and center-mounting options available Cable Collar in matching finish optional for center mounting SYSTEM RUN Limited by power supply wattage only
--	--	---

BUILD A SPECIFICATION | THIN Primaries Rhombus Suspension

SERIES	FINISH	CONFIGURATION	SEGMENTS	COLOR TEMP	MOUNTING
JPR-THES	0	RHM	X X	F	
			2 OR 3	LENS	POWER SUPPLY

SAMPLE SKU: JPR-THES-01-RHM-3-30-F-R-CX
Satin Brass, 36" segments, 3000K, frosted lens, remote power supply, center-mount to canopy without cable collar

CODE DEFINITIONS

FINISHES



SEGMENTS

2 24 inch - 2400LM delivered / 27.2W
3 36 inch - 3680LM delivered / 38.4W
Contact Juniper for custom segment lengths

COLOR TEMPERATURE

27 2700K
30 3000K
35 3500K
40 4000K

LENS

F Frosted - 90° beam angle

MOUNTING

CX Center-Mount to Canopy without Cable Collar
Includes corresponding canopy
CC Center-Mount to Canopy with Cable Collar (upcharge)
Includes corresponding canopy
DM Direct-Mount to Junction Box (Local or Remote)
Includes corresponding canopy for a single power cord with ceiling grippers for other mounting points
MM 2" Mini Mount | Direct-Mount to Ceiling (Remote Only)
Includes corresponding canopy for a single power cord with ceiling grippers for other mounting points

POWER SUPPLY OPTIONS

R. REMOTE

STANDARD 120-277V INPUT - 2-WIRE/TRIAC/FORWARD PHASE/ELV

STANDARD 120-277V INPUT - 0-10V

LUTRON 120V INPUT - TRIAC DIMMING (40W) (UPCHARGE)

LUTRON 120-277V INPUT - 3-WIRE (UPCHARGE)

L. LOCAL

STANDARD 120-277V INPUT - TRIAC/0-10V/ELV DIMMING

Our team will determine correct wattages for power supplies based on chosen configuration. Contact Juniper for custom requirements or further power supply specifications.

Project	Type
Notes	