
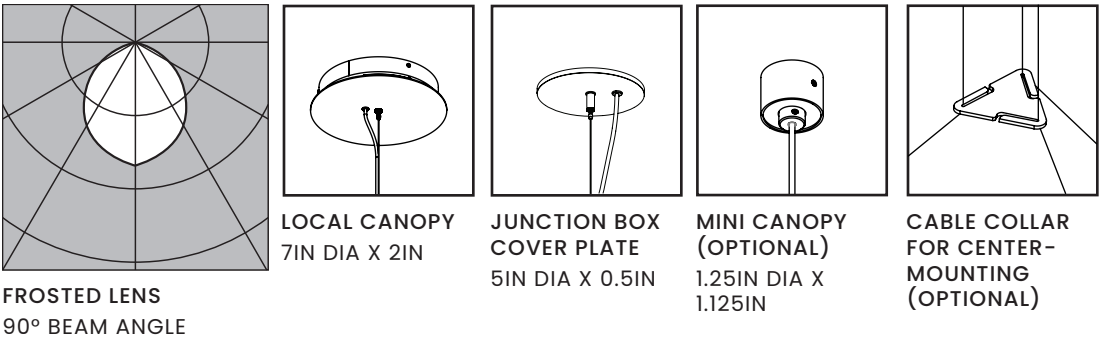


TECHNICAL | THIN Primaries Triangle Suspension

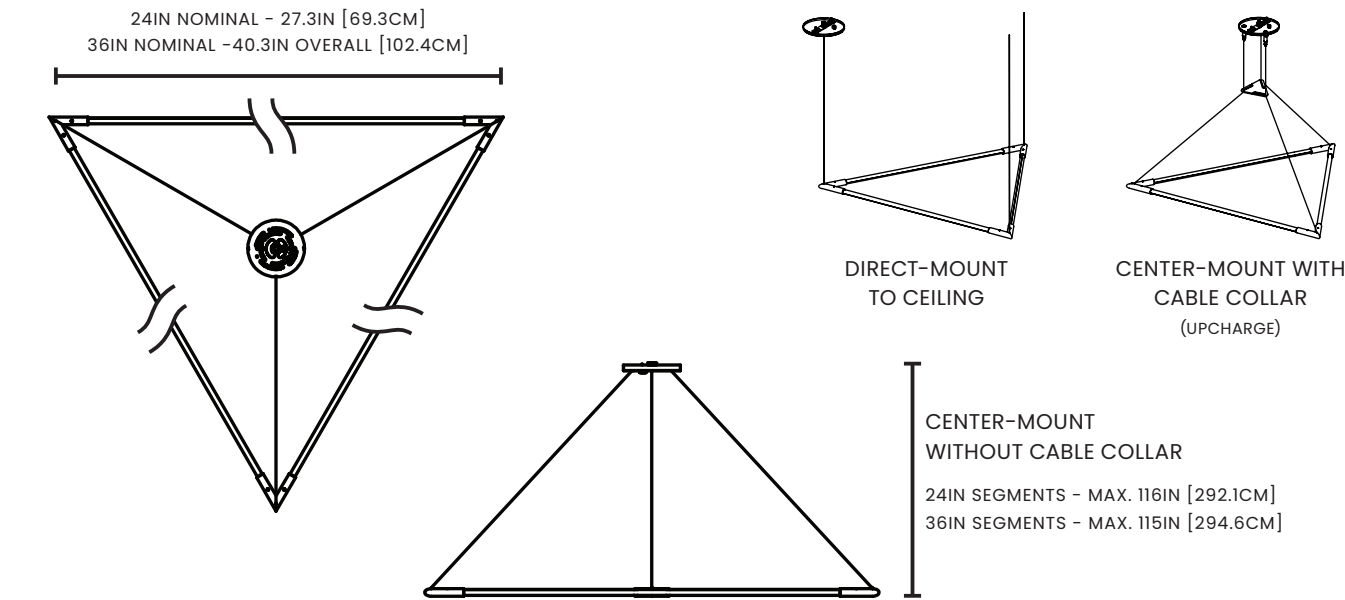

<b>ILLUMINATION</b> CRI 95+, R9 90+ standard 2700K, 3000K, 3500K, 4000K options  <b>24" segment</b> 1800LM delivered / 20.4W <b>36" segment</b> 2760LM delivered / 28.8W 90LM/W 50,000 hrs LED life L80	<b>FINISHES</b> Satin Brass, Black Oxide, Satin Nickel  <b>MATERIALS</b> Solid brass, PMMA  <b>DIMMING</b> 2-Wire/TRIAC/Forward Phase 0-10V 3-Wire See Power Supply section for details Contact Juniper for alternate requirements	<b>MOUNTING</b> (x3) 1/16" aircraft cables, field adjustable 16ft Clear-jacketed 22AWG co-axial silver cord, field adjustable Direct-mounting and center-mounting options available Cable Collar in matching finish optional for center mounting  <b>SYSTEM RUN</b> Limited by power supply wattage only
--	--	---

BUILD A SPECIFICATION | THIN Primaries Triangle Suspension

SERIES	FINISH	CONFIGURATION	SEGMENTS	COLOR TEMP	MOUNTING
JPR-THES	0	TRI	X X	F	
			2 OR 3	LENS	POWER SUPPLY

**SAMPLE SKU: JPR-THES-02-TRI-2-27-C-R-CC**  
Black Oxide, 24" segments, 2700K, clear lens, remote power supply, center-mount to a canopy with a cable collar

CODE DEFINITIONS

FINISHES



SEGMENTS

**2** 24 inch - 1800LM delivered / 20.4W  
**3** 36 inch - 2760LM delivered / 28.8W  
Contact Juniper for custom segment lengths

COLOR TEMPERATURE

**27** 2700K  
**30** 3000K  
**35** 3500K  
**40** 4000K

LENS

**F** Frosted - 90° beam angle

MOUNTING

**CX** Center-Mount to Canopy without Cable Collar  
Includes corresponding canopy  
**CC** Center-Mount to Canopy with Cable Collar (upcharge)  
Includes corresponding canopy  
**DM** Direct-Mount to Junction Box (Local or Remote)  
Includes corresponding canopy for a single power cord with ceiling grippers for other mounting points  
**MM** 2" Mini Mount | Direct-Mount to Ceiling (Remote Only)  
Includes corresponding canopy for a single power cord with ceiling grippers for other mounting points

POWER SUPPLY OPTIONS

R. REMOTE

STANDARD 120-277V INPUT - 2-WIRE/TRIAC/FORWARD PHASE/ELV  
  
STANDARD 120-277V INPUT - 0-10V  
  
LUTRON 120V INPUT - TRIAC DIMMING (40W ) (UPCHARGE)  
  
LUTRON 120-277V INPUT - 3-WIRE (UPCHARGE)

L. LOCAL

STANDARD 120-277V INPUT - TRIAC/0-10V/ELV DIMMING

Our team will determine correct wattages for power supplies based on chosen configuration. Contact Juniper for custom requirements or further power supply specifications.

Project	Type
Notes	