





TECHNICAL | THIN Single Float

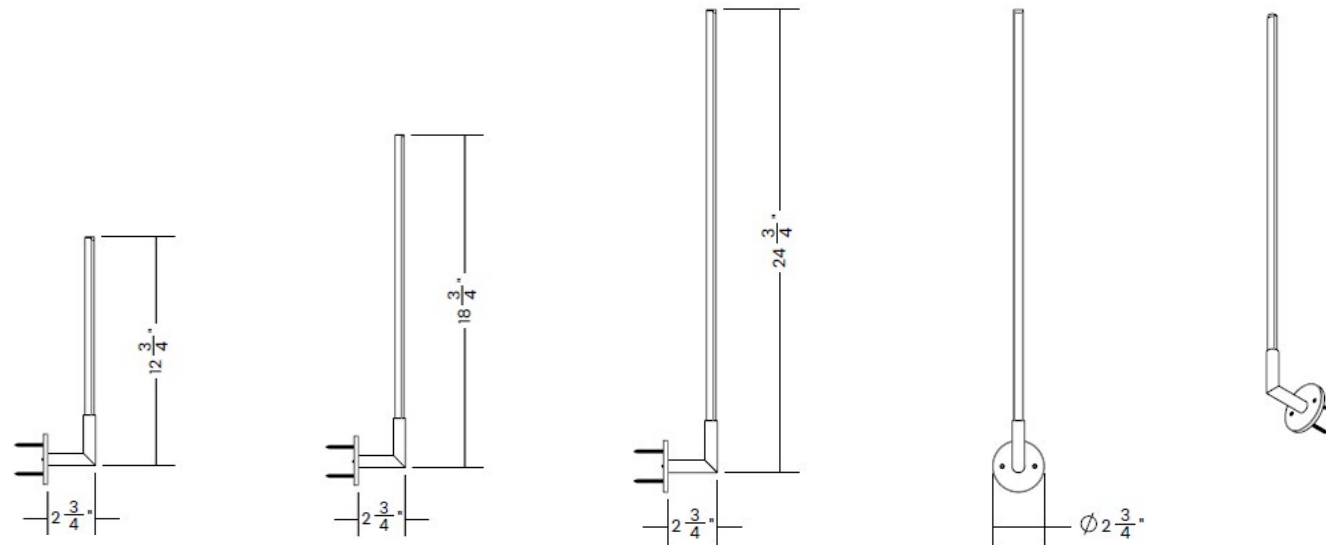

FROSTED LENS
90° BEAM ANGLE



REMOTE PLATE
2.75IN DIA X .25IN



JUNCTION BOX
COVER PLATE
4.75IN DIA X 0.5IN

ILLUMINATION

CRI 95+, R9 90+ standard
2700K, 3000K, 3500K, 4000K options

12" segment 300LM delivered / 3.4W
18" segment 450LM delivered / 5.1W
24" segment 600LM delivered / 6.8W
90LM/W
50,000 hrs LED life L80

POWER

120VAC Input Voltage
24VDC Class 2 Constant Voltage
Contact Juniper for alternate inputs

FINISHES

Satin Brass, Black Oxide, Satin Nickel

MATERIALS

Solid brass, PMMA

DIMMING

2-Wire/TRIAC/Forward Phase/ELV
0-10V
3-Wire
See Power Supply section for details
Contact Juniper for alternate requirements


MOUNTING

Wall brackets mount directly to surface

SYSTEM RUN

Limited by power supply wattage only
2 X 18AWG in-wall rated cable
recommended for remote power
supply installation (provided by
electrician)

BUILD A SPECIFICATION | THIN Single Float

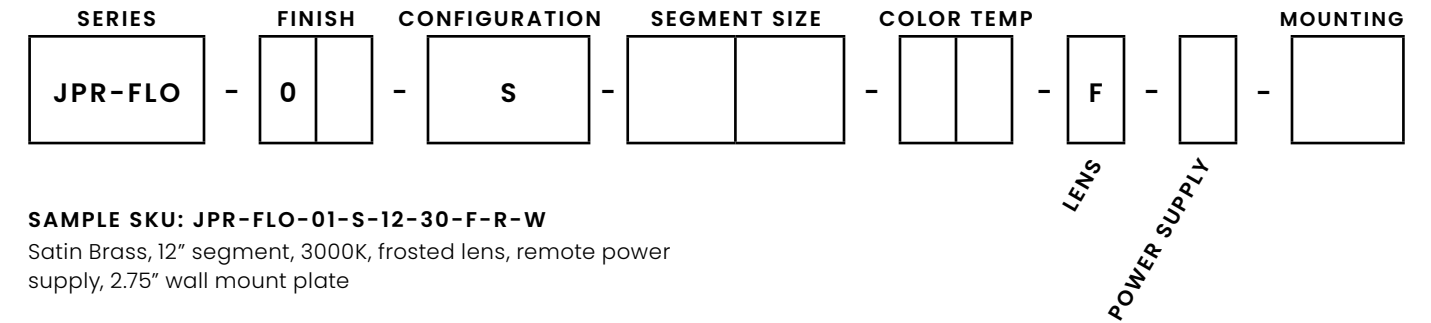

SAMPLE SKU: JPR-FLO-01-S-12-30-F-R-W
Satin Brass, 12" segment, 3000K, frosted lens, remote power supply, 2.75" wall mount plate

CODE DEFINITIONS

FINISHES



01 Satin Brass 02 Black Oxide 03 Satin Nickel 04 Bronze

SEGMENTS

12 12 inch segment - 300LM delivered / 3.4W
18 18 inch segment - 450LM delivered / 5.1W
24 24 inch segment - 600LM delivered / 6.8W

MOUNTING

J 4.75" Junction box cover plate
W 2.75" Remote plate

COLOR TEMPERATURE

27 2700K
30 3000K
35 3500K
40 4000K

LENS

F Frosted - 90° beam angle

POWER SUPPLY OPTIONS

R. REMOTE

STANDARD 120-277V INPUT - 2-WIRE/TRIAC/FORWARD PHASE/ELV

STANDARD 120-277V INPUT - 0-10V

LUTRON 120V INPUT - TRIAC DIMMING (40W) (UPCHARGE)

LUTRON 120-277V INPUT - 3-WIRE (UPCHARGE)

L. LOCAL

STANDARD 120-277V INPUT - TRIAC/0-10V/ELV DIMMING

Project	Type
Notes	