
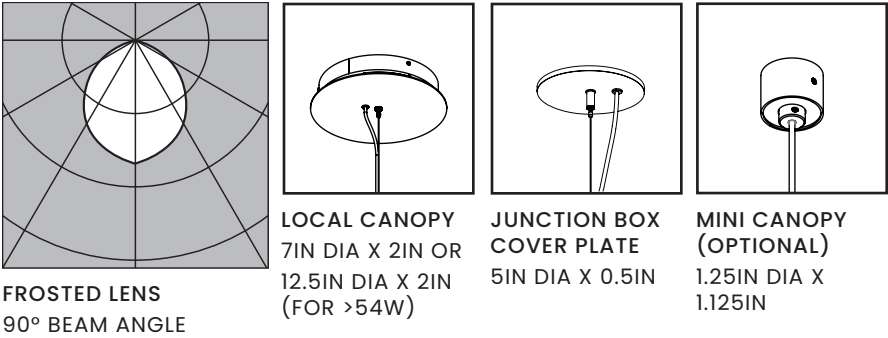
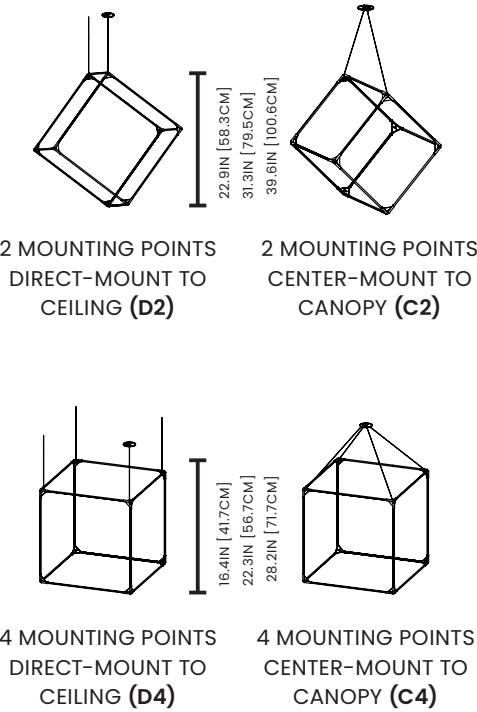


TECHNICAL | THIN Solids Cube

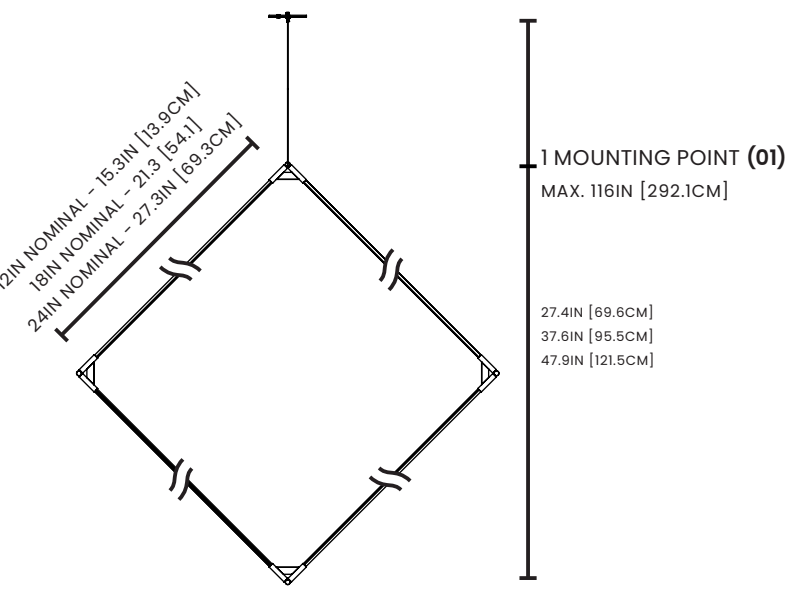

ILLUMINATION CRI 95+, R9 90+ standard 2700K, 3000K, 3500K, 4000K options 12" segment 3600LM delivered/40.8W 18" segment 5400LM delivered/61.2W 24" segment 7200LM delivered/81.6W 90LM/W 50,000 hrs LED life L80	FINISHES Satin Brass, Black Oxide, Satin Nickel MATERIALS Solid brass, PMMA DIMMING 2-Wire/TRIAC/Forward Phase 0-10V 3-Wire See Power Supply section for details Contact Juniper for alternate requirements	MOUNTING (x1 or x3) 1/16" aircraft cables, field adjustable 16ft Clear-jacketed 22AWG co-axial silver cord, field adjustable 1, 2, or 4 mounting point options SYSTEM RUN Limited by power supply wattage
--	--	--

BUILD A SPECIFICATION | THIN Solids Cube

SERIES	FINISH	CONFIGURATION	SEGMENTS	COLOR TEMP	LENS	POWER SUPPLY	MOUNTING POINTS
JPR-THES	- 0	- CUB	-	-	- F	-	-

SAMPLE SKU: JPR-THES-01-CUB-24-30-F-R-D2
Satin Brass, 24" segments, 3000K, frosted lens, remote power supply, suspended from two corners

CODE DEFINITIONS

FINISHES



SEGMENTS

12 12 inch - 3600LM delivered / 40.8W
18 18 inch - 5400LM delivered / 61.2W
24 24 inch - 7200LM delivered / 81.6W
Contact Juniper for custom segment lengths

COLOR TEMPERATURE

27 2700K
30 3000K
35 3500K
40 4000K

LENS

F Frosted - 90° beam angle

MOUNTING

01 1 Mounting Point
Suspended from 1 corner
D2 2 Mounting Points, Direct-Mount to Ceiling
Suspended from 2 corners
C2 2 Mounting Points, Center-Mount to Canopy
Suspended from 2 corners
D4 4 Mounting Points, Direct-Mount to Ceiling
Suspended from 4 corners
C4 4 Mounting Points, Center-Mount to Canopy
Suspended from 4 corners

POWER SUPPLY OPTIONS

R. REMOTE
STANDARD 120-277V INPUT - 2-WIRE/TRIAC/FORWARD PHASE/ELV
STANDARD 120-277V INPUT - 0-10V
LUTRON 120-277V INPUT - 3-WIRE (UPCHARGE)
L. LOCAL
STANDARD 120-277V INPUT - TRIAC/0-10V/ELV DIMMING

Our team will determine correct wattages for power supplies based on chosen configuration. Contact Juniper for custom requirements or further power supply specifications.

Project	Type
Notes	