



TECHNICAL | THIN Suspension

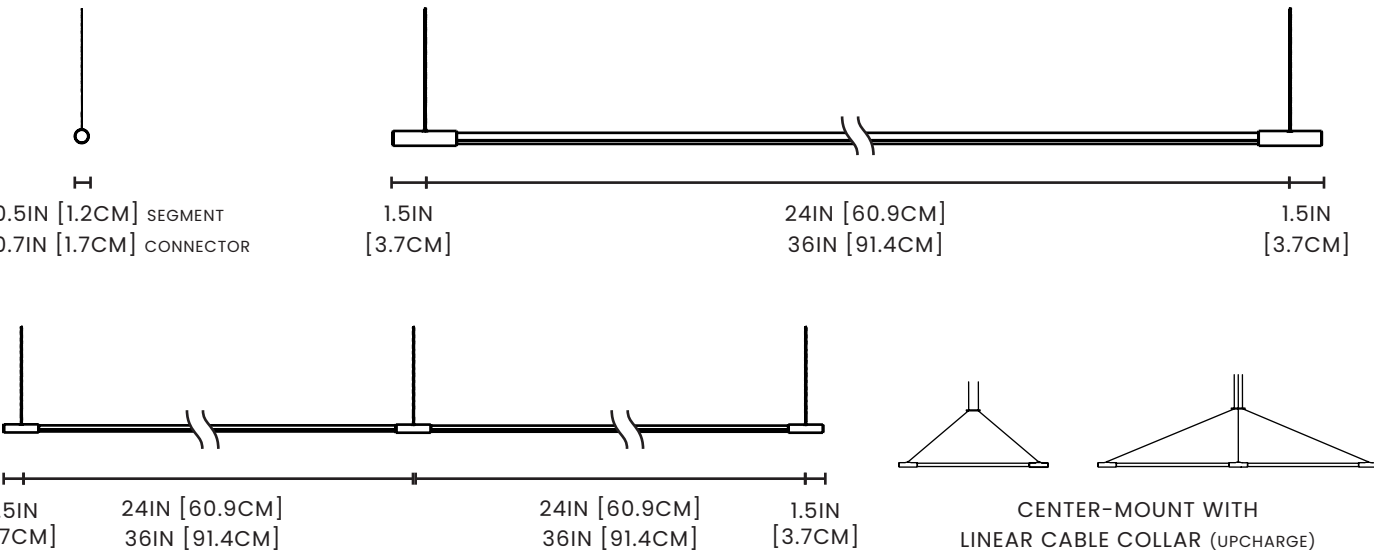

24IN AND 36IN LIGHT SEGMENTS MAY BE COMBINED IN THE SAME FIXTURE
STANDARD MAX LENGTH PER FIXTURE IS (3) 36" LIGHT SEGMENTS 110.8IN [281.5CM]
FOR LONGER RUNS, PLEASE CONTACT JUNIPER

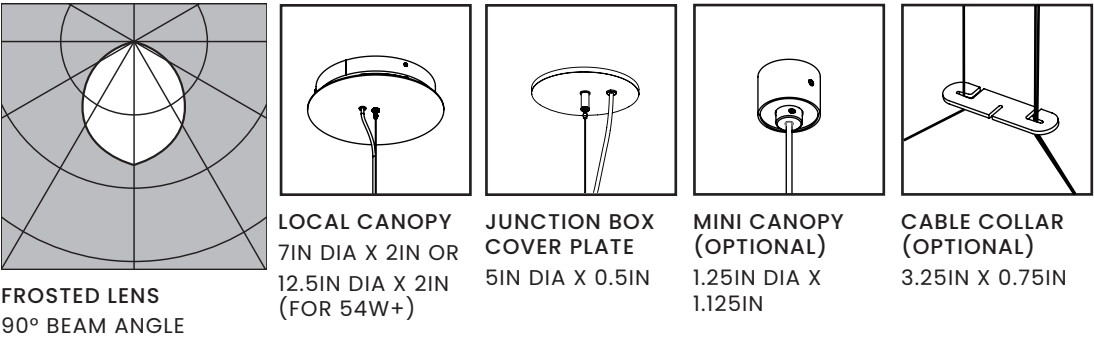

ILLUMINATION CRI 95+, R9 90+ standard 2700K, 3000K, 3500K, 4000K options 24" segment 600LM delivered 6.8W/segment 36" segment 920LM delivered 9.6W/segment 90LM/W 50,000 hrs LED life L80	FINISHES Satin Brass, Black Oxide, Satin Nickel MATERIALS Solid brass, PMMA DIMMING 2-Wire/TRIAC/Forward Phase 0-10V 3-Wire See Power Supply section for details Contact Juniper for alternate requirements	MOUNTING 10ft 1/16" aircraft cable, field adjustable 16ft Clear-jacketed 22AWG co-axial silver cord, field adjustable Direct-mounting and center-mounting with Linear Cable Collar options available (for up to 2 connected segments) SYSTEM RUN Limited by power supply wattage only
--	---	--

Designed by Peter Bristol & Juniper

BUILD A SPECIFICATION | THIN Suspension

SERIES	FINISH	SEGMENTS	COLOR TEMP	MOUNTING	POWER FEED
JPR-THES	- 0		- - F	- - -	- P

LENS
POWER SUPPLY

SAMPLE SKU: JPR-THES-01-00333-30-F-R-DM-CP
Satin Brass, (3) connected 36" segments, 3000K, frosted lens, remote power supply, direct-mount to ceiling with a center power feed

CODE DEFINITIONS

FINISHES



SEGMENTS

0 No Segment
2 24 inch segment - 600LM delivered / 6.8W
3 36 inch segment - 920LM delivered / 9.6W
Each digit represents a single segment, e.g. 00002 is (1) 24" segment. Contact Juniper for custom segment lengths.

COLOR TEMPERATURE

27 2700K
30 3000K
35 3500K
40 4000K

LENS

F Frosted - 90° beam angle

MOUNTING

CX Center-Mount to Canopy without Cable Collar
Includes corresponding canopy
CC Center-Mount to Canopy with Cable Collar (upcharge)
Includes corresponding canopy
DM Direct-Mount to Junction Box (Local or Remote)
Includes corresponding canopy for a single power cord with ceiling grippers for other mounting points
MM 2" Mini Mount | Direct-Mount to Ceiling (Remote Only)
Includes corresponding canopy for a single power cord with ceiling grippers for other mounting points

POWER SUPPLY OPTIONS

R. REMOTE

STANDARD 120-277V INPUT - 2-WIRE/TRIAC/FORWARD PHASE/ELV
STANDARD 120-277V INPUT - 0-10V
LUTRON 120V INPUT - TRIAC DIMMING (40W) (UPCHARGE)
LUTRON 120-277V INPUT - 3-WIRE (UPCHARGE)

L. LOCAL

STANDARD 120-277V INPUT - TRIAC/0-10V/ELV DIMMING

Our team will determine correct wattages for power supplies based on chosen configuration. Contact Juniper for custom requirements or further power supply specifications.

POWER FEED

EP End Power Feed
Located at the end of the fixture
CP Center Power Feed
Optional for 2+ Connected Segments

Project	Type
Notes	