

TECHNICAL | THIN Vertical Suspension




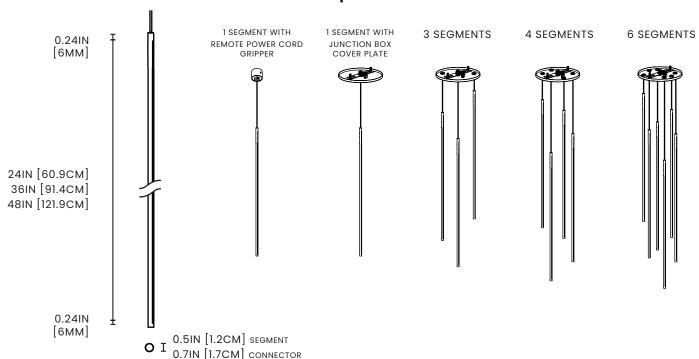


FROSTED LENS 90° BEAM ANGLE



LOCAL CANOPY JUNCTION BOX 7IN DIA X 2IN OR 12.5IN DIA X 2IN (FOR >54W)



COVER PLATE 5IN DIA X 0.5IN



MINI CANOPY (OPTIONAL) 1.25IN DIA X 1.125IN

ILLUMINATION

CRI 95+, R9 90+ standard 2700K, 3000K, 3500K, 4000K options 24" segment 600LM delivered 6.8W/segment

36" segment 920LM delivered 9.6W/segment

48" segment 1227LM delivered 13.6W/segment 90LM/W 50,000 hrs LED life L80

POWER

24VDC output Class 2 constant voltage power supply 120VAC input voltage Contact Juniper for alternate inputs

Designed by Peter Bristol & Juniper

FINISHES

Satin Brass, Black Oxide, Satin Nickel

MATERIALS

Solid brass, PMMA

DIMMING

2-Wire/TRIAC/Forward Phase 0-10V

3-Wire

See Power Supply section for details Contact Juniper for alternate requirements

MOUNTING

10ft 1/16" aircraft cable, field adjustable 16ft Clear-jacketed 22AWG co-axial silver cord, field adjustable All segments installed together on a single canopy For individual canopies, SKU a single


segment and order in duplicates

SYSTEM RUN

Limited to one aircraft cable per segment Contact us for custom configurations

(4) (4) (€ FC ∆DAMP RATED & ADA COMPLIANT

BUILD A SPECIFICATION | THIN Vertical Suspension

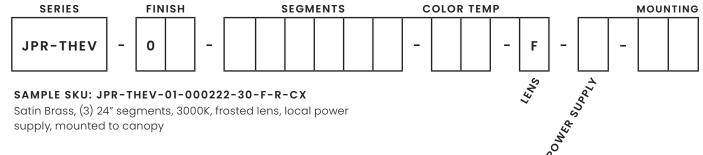

CODE DEFINITIONS

6

FINISHES



2 24 inch segment - 600LM delivered / 6.8W 3 36 inch segment - 920LM delivered / 9.6W

4 48 inch segment - 1227LM delivered / 13.6W

Each digit represents a single segment, e.g. 000023 is (1)

24" segment and (1) 36" segment. Contact Juniper for

40 Bronze

R. REMOTE

STANDARD 120-277V INPUT - 2-WIRE/TRIAC/FORWARD PHASE/ELV

STANDARD 120-277V INPUT - 0-10V

POWER SUPPLY OPTIONS

LUTRON 120V INPUT - TRIAC DIMMING (40W) (UPCHARGE)

LUTRON 120-277V INPUT - 3-WIRE (UPCHARGE)

L. LOCAL

STANDARD 120-277V INPUT - TRIAC/0-10V/ELV DIMMING

COLOR TEMPERATURE

custom segment lengths.

27 2700K

30 3000K

SEGMENTS

O No Segment

35 3500K

40 4000K

LENS

F Frosted - 90° beam angle

MOUNTING

CX Mounted to Canopy

Includes one corresponding canopy for all segments MM 2" Mini Mount | Direct-Mount to Ceiling (Remote Only) Includes corresponding canopy for a single power cord with ceiling grippers for other mounting points

Our team will determine correct wattages for power supplies based on chosen configuration. Contact Juniper for custom requirements or further power supply specifications.

Project	Туре
Notes	

WWW.JUNIPER-DESIGN.COM | INFO@JUNIPER-DESIGN.COM +1 347-799-2915 | 157 WATER STREET SOUTHINGTON, CT 06489 WWW.JUNIPER-DESIGN.COM INFO@JUNIPER-DESIGN.COM +1 347-799-2915 157 WATER STREET SOUTHINGTON, CT 06489