





OVERVIEW



- Light segments in 24–72" lengths can be suspended individually or attached to each other — using simple snap-in magnetic connector rings — to create various linear fixture lengths up to 24 ft (nominal)
  - Segments can individually rotate 360°
  - 24 VDC output Class 2 constant voltage power supply
  - 120–277 VAC input voltage
  - Dimming options: 2-Wire/TRIAC/Forward Phase; 0–10 V; 3-Wire
  - Field-adjustable aircraft cables and clear-jacketed co-axial silver cord
  - Direct-mount (to ceiling)
- CRI 95+
  - R9 90+
  - 90 LM/W delivered efficacy
  - 300 LM per linear foot (maximum)
  - Frosted lens with 90° beam spread




Example:  
**JPR-THES-CMON-XXX-000004-XX-XX**  
 4' nominal (1 light segment)

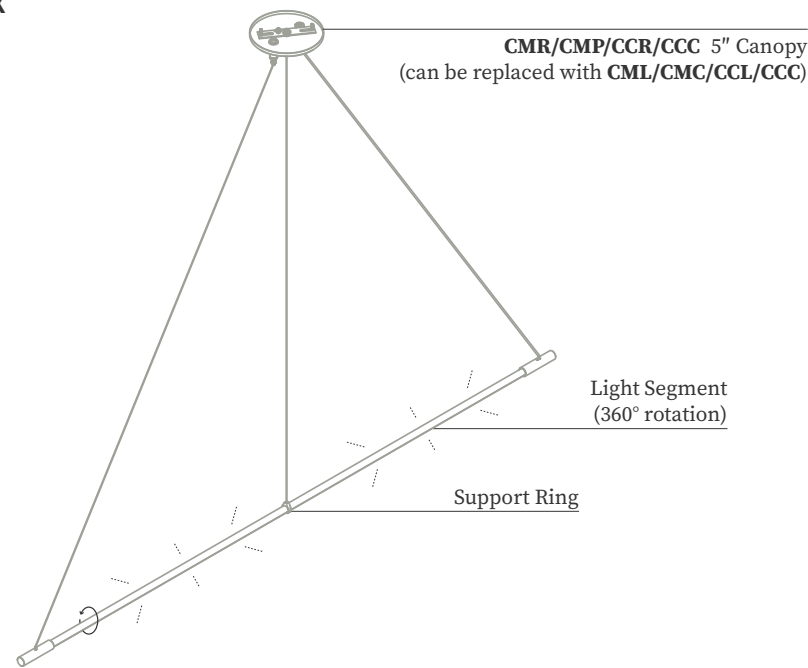

Maximum cable length is 114 in | 2896 mm.




SPECIFICATION BUILDER




1. Mounting	2. Segments	3. CCT	4. Finish
<b>CMR</b> 5" Canopy, Center Mount Remote Power Supply not included	<b>000002</b> 2'	<b>27</b> 2700 K	<b>01</b> Satin Brass
<b>CMP</b> 5" Canopy, Center Mount Remote Power Supply included	<b>000003</b> 3'	<b>30</b> 3000 K	<b>02</b> Black Oxide
<b>CML</b> Juniper Power Hub – White, Center Mount Power Supply included	<b>000004</b> 4'	<b>35</b> 3500 K	<b>03</b> Satin Nickel
<b>CMC</b> Juniper Power Hub – Custom, Center Mount Power Supply included	<b>000005</b> 5'	<b>40</b> 4000 K	<b>40</b> English Bronze
<b>CCR</b> 5" Canopy, Center Mount with Collar Remote Power Supply not included	<b>000006</b> 6'	See pages 140–142 for mounting/spacing configurations and dimensions for various fixture lengths.	<b>30</b> Matte Pure White
<b>CCP</b> 5" Canopy, Center Mount with Collar Remote Power Supply included			<b>32</b> Matte Black
<b>CCL</b> Juniper Power Hub – White, Center Mount with Collar Power Supply included			<b>33</b> Satin Aluminum
<b>CCC</b> Juniper Power Hub – Custom, Center Mount with Collar Power Supply included			<b>CU</b> Custom

Stock finishes shown.  
 See [Finishes](#) for additional options.

POWER FEED OPTIONS

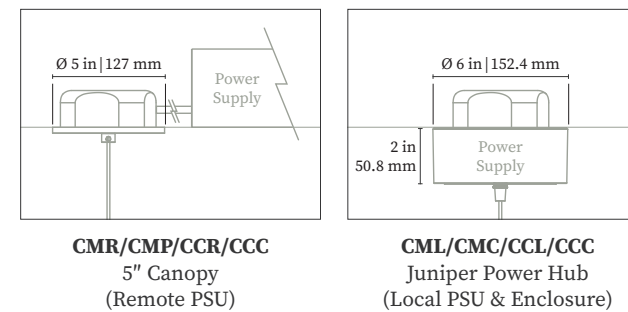

MOUNTING OPTIONS

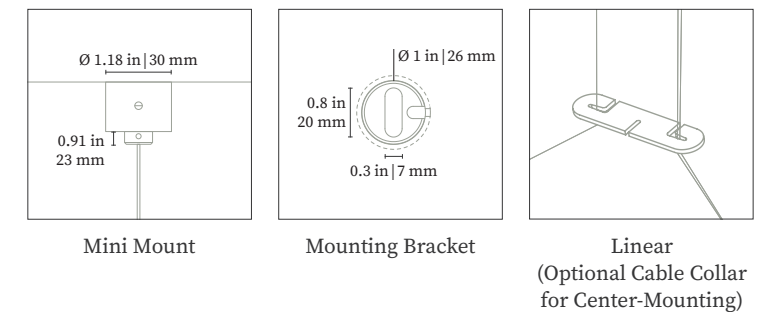

For detailed photometrics, see [Photometric Data](#).  
 IES files available.




SYSTEM LOGIC

Example:

**JPR-THES-CMON-XXX-000004-XX-XX**

4' nominal (1 light segment)

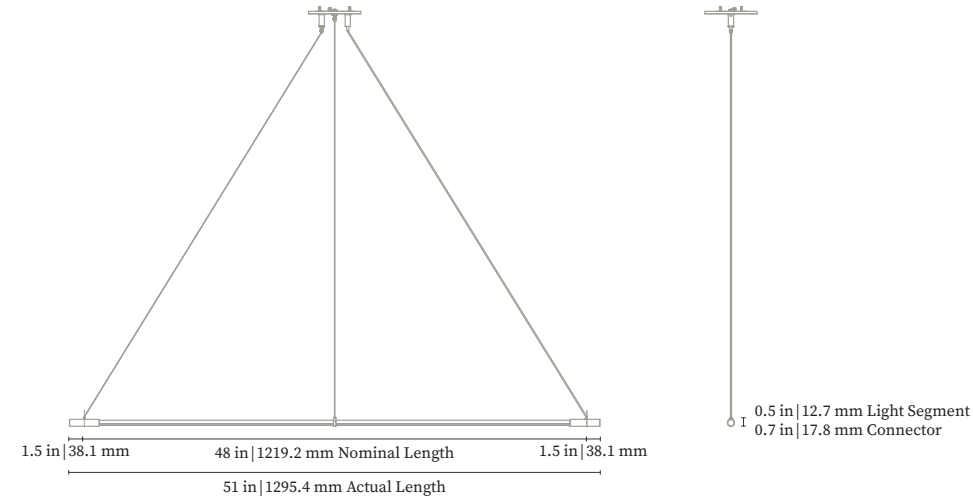


NOMINAL FIXTURE LENGTHS

1. SKU	2. Nominal Length	3. Actual Length	4. Quantity of Light Segments	5. Quantity of Mounting Points	6. Total Wattage (W)	7. LM
000002	2'	26.875 in	1	0	6.8	600
000003	3'	38.875 in	1	0	9.6	920
000004	4'	50.875 in	1	1	13.1	1240
000005	5'	62.875 in	1	1	16.6	1560
000006	6'	74.875 in	1	1	20	1900


For the configuration drawings, see page 142.

CONFIGURATIONS — DIAGRAMS

WITHOUT CABLE COLLAR

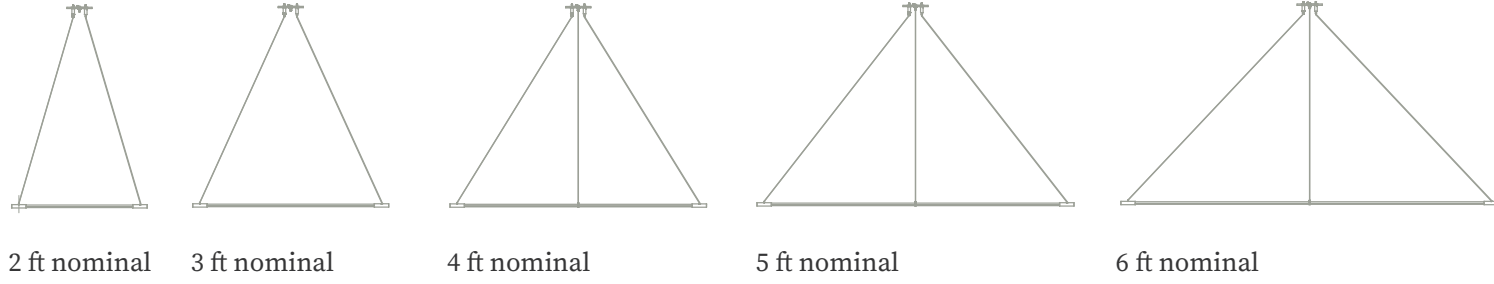

WITH CABLE COLLAR

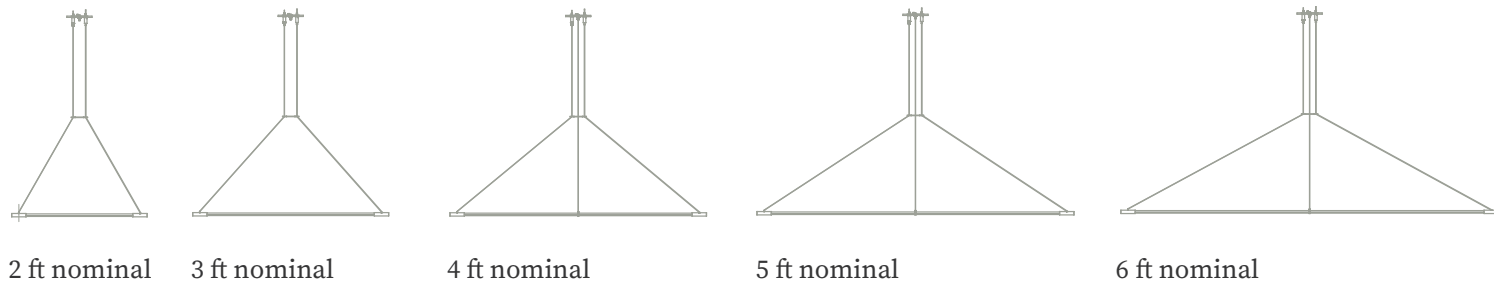

INTENTIONALLY LEFT BLANK