


## E-WTC

**Product Description:** E-WTC: Electronic wall thickness control

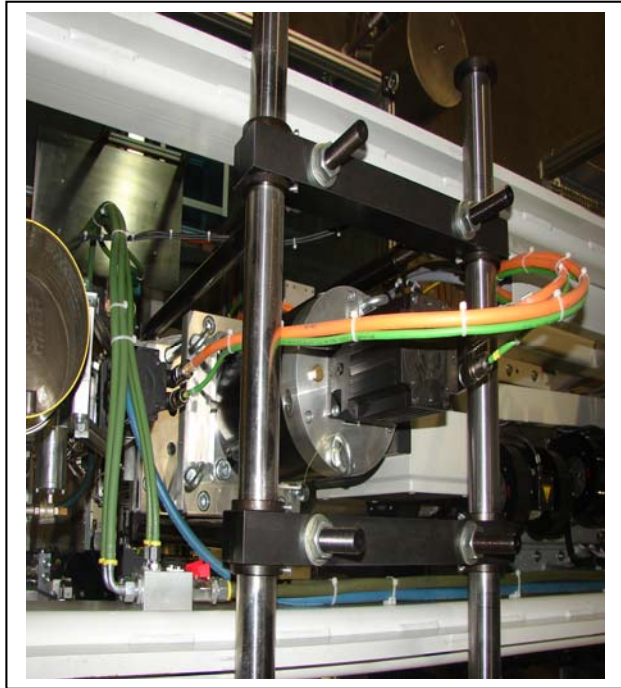

### Advantages:

- More precise movement
- Better repeatability compared to hydraulic system
- Eliminates risk of product contamination by oil.
- A requirement for medical product manufacturers.

### Features:

- Can be integrated into existing B+R PLC systems and Uniloy visualisation software with a control panel wiring modification and software upgrade.
- Hardware dependent on type and size of head
- Can be retrofitted to replace Hydraulic WTC system.
- Parison wall thickness Deviation accuracy up to 0,05mm

### Hardware Requirements:

- Additional controller required (assuming space is available in machine control panel)
- Standalone function or integrated into B+R PLC system.

### Main functions:

Parison wall thickness controller for improved accuracy.

### Product Availability:

<b>HYDRAULIC MACHINES UMS</b>	UMS 4.S/D	UMS 8.S/D	UMS 12.S/D	UMS 16.S/D	UMS 20.S/D	UMS 24.S/D	UMS 30LS.S/D	UMS 32.S/D	UMS 35LS.S/D	UMS 35.S/D
WTC	X	X	X	X	X	X	X	X	X	X
<b>ALL ELECTRIC MACHINES UMS</b>	UMS 4E.S/D	UMS 8E.S/D	UMS 12E.S/D	UMS 20E.S/D	UMS 32E.S/D					
E-WTC	X	X	X	X	X					