


## View Stripe Function

**Product Description :** Visible stripe on product to show fill level.

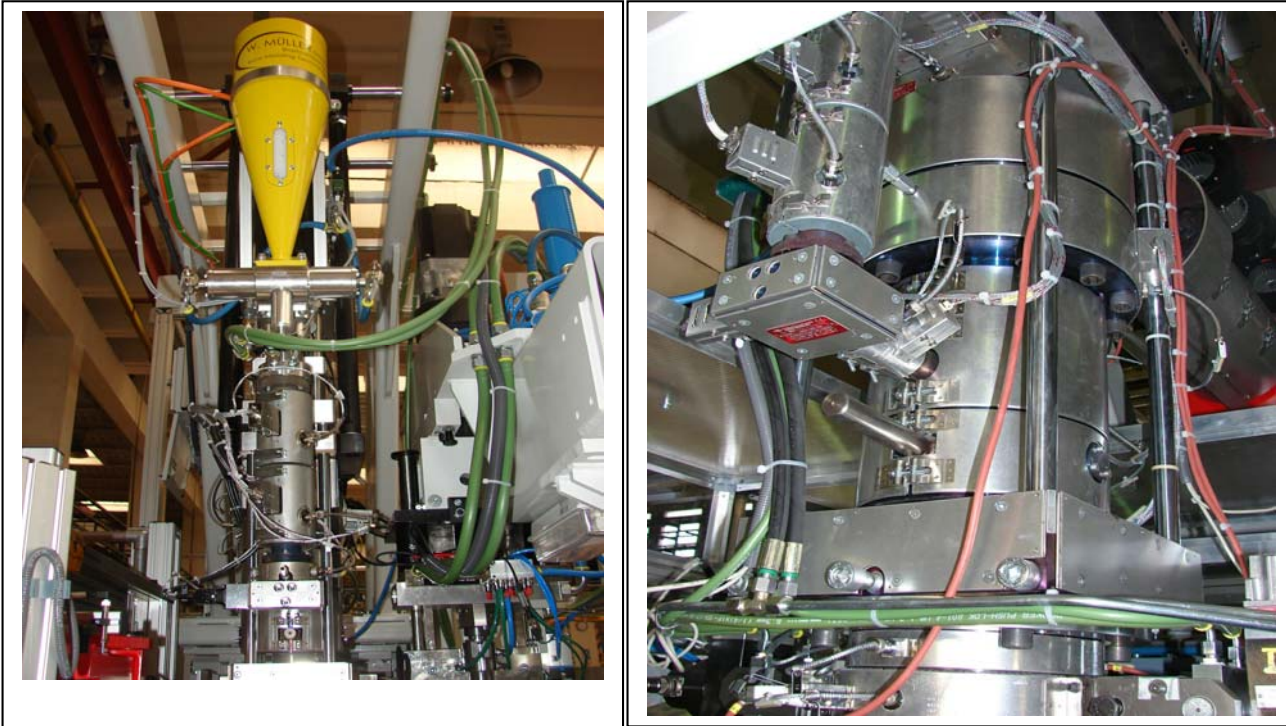

### Advantages :

- Increases diversity of product range by adding visible content stripe function.
- Can be switched 180° to opposite side of head
- Upgrade possible on many existing W. Müller Extrusion heads

### Features:

- Can be integrated into existing B+R PLC systems and Uniloy visualisation software with a control panel wiring modification and software upgrade.
- Stand alone option available with separate controller/panel and screen.

### Hardware requirements:

- Check Extrusion head serial number for compatibility. (Can be retro fitted to many W. Müller heads) Requires installation of an extra extruder, hopper, a 3 way pneumatic valve and associated fittings. Available screw diameters are 18mm, 25mm and 30mm.
- Extra controller required (assuming space available in machine control panel ) .
- Additional heating zones and associated electrical wiring required.

### Main functions:

- Add view stripe in incrementally adjustable size

### Product Availability:

	UMS 4.S/D	UMS 8.S/D	UMS 12.S/D	UMS 16.S/D	UMS 20.S/D	UMS 24.S/D	UMS 30LS.S/D	UMS 32.S/D	UMS 35LS.S/D	UMS 35.S/D
<b>HYDRAULIC MACHINES UMS</b>										
View stripe function	X	X	X	X	X	X	X	X	X	X
<b>ALL ELECTRIC MACHINES UMS</b>										
	UMS 4E.S/D	UMS 8E.S/D	UMS 12E.S/D	UMS 20E.S/D	UMS 32E.S/D					
View stripe function	X	X	X	X	X					