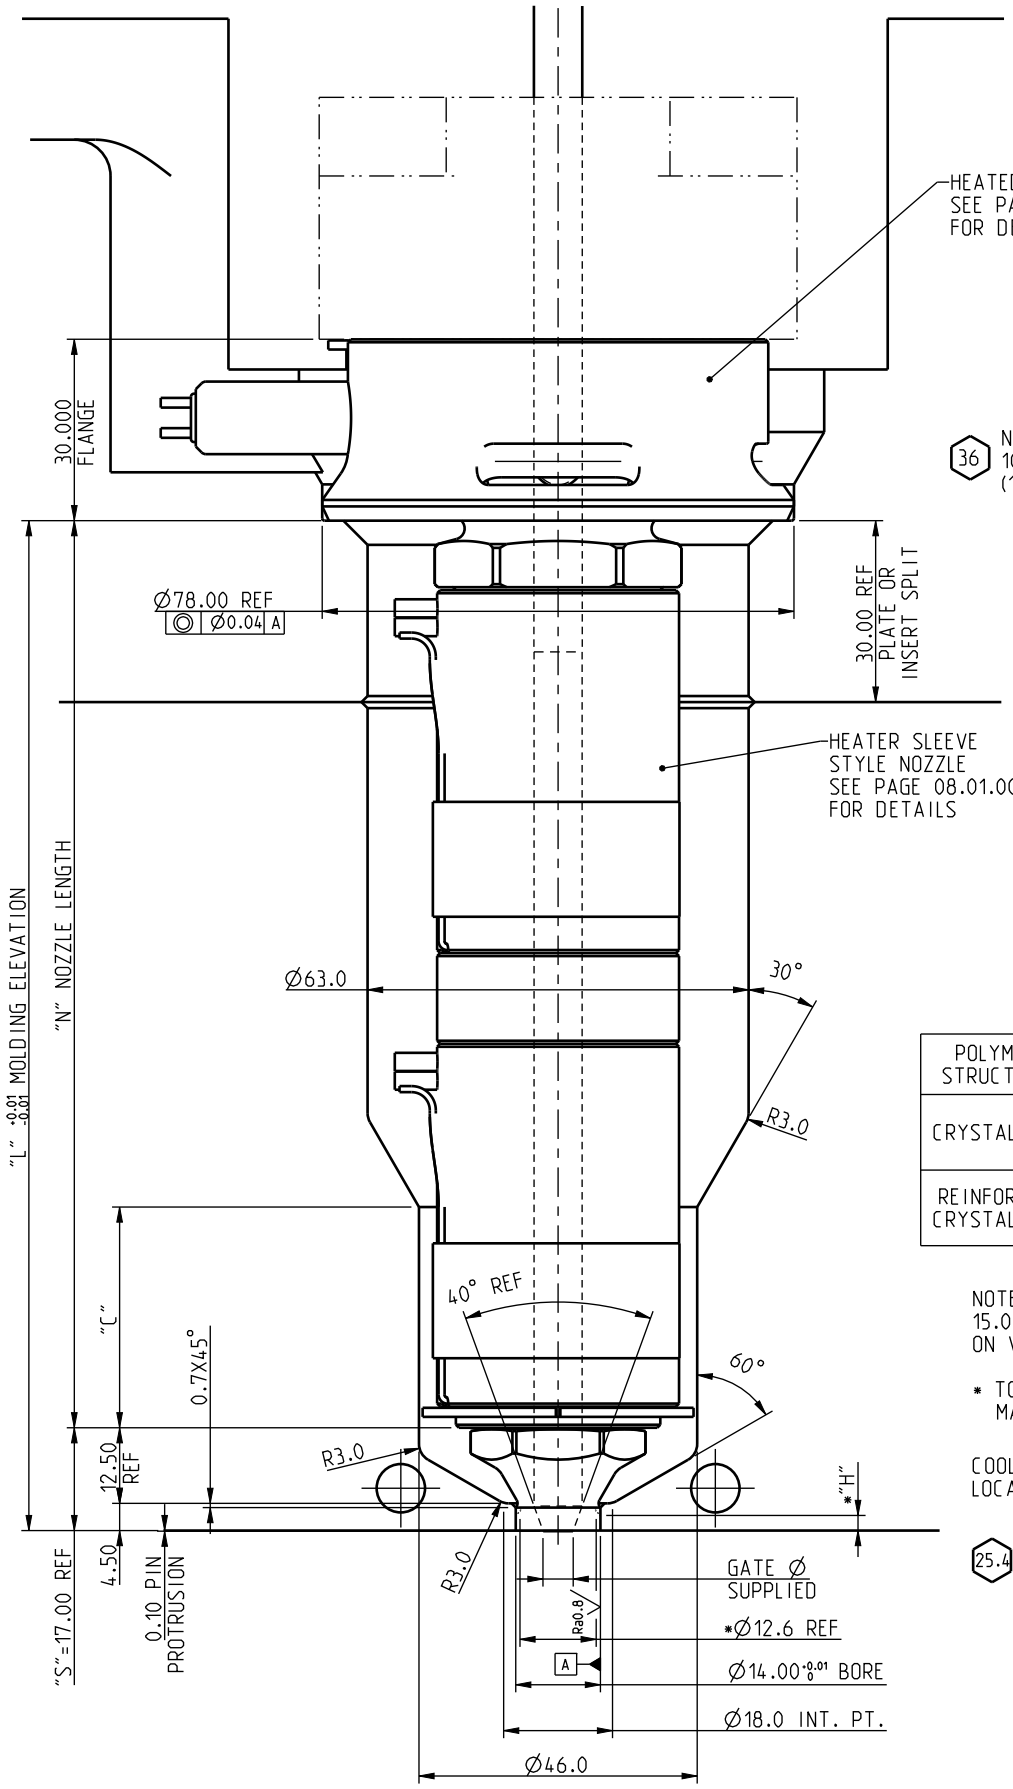

"N"	"C"
> 288.00	66.5

POLYMER STRUCTURE	CONTACT LENGTH *"H"
CRYSTALLINE	3.80 AS SUPPLIED
REINFORCED CRYSTALLINE	2.50

NOTE:
15.0 MM MIN. STROKE REQ'D ON VALVE GATE ACTUATOR.

* TO BE FINISHED BY MOLD-MAKER

COOLING CIRCUIT TO BE LOCATED NEAR THE GATE

25.4 SEAL TORQUE
35-40 ft-lbs
(47-54 N.m)

© May 2017