




OVERVIEW




- Task lamp in two spacing options, with three convenient localized control options
- 24 VDC output Class 2 constant voltage power supply
- 120–277 VAC input voltage
- Direct-mount (to ceiling)

- CRI 95+
- R9 90+
- 90 LM/W delivered efficacy
- 300 LM per linear foot (maximum)
- Frosted lens with 90° beam spread



Example:
JPR-THET-MONO-XXX-000022-XXX-XX-XX
4' nominal — 2 segments (2 light segments)

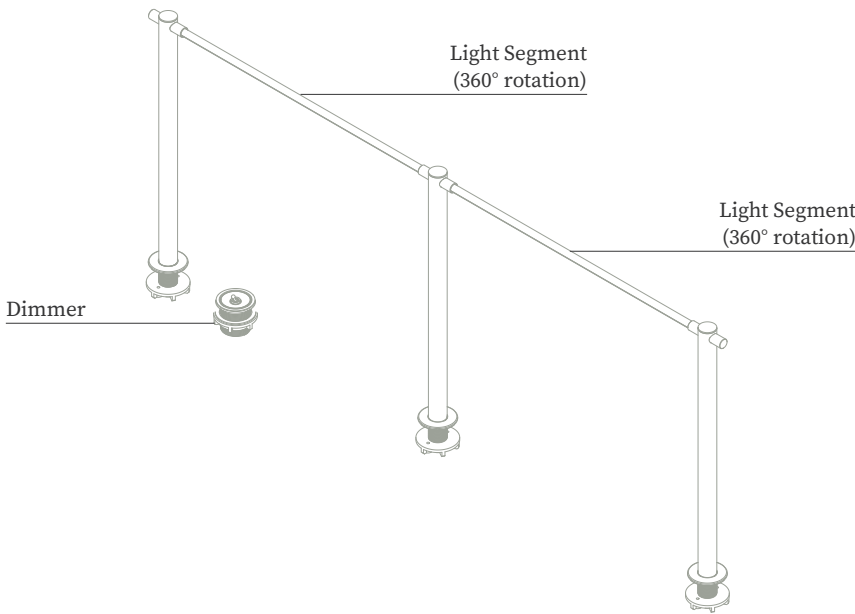

Patent www.juniperdesign.com/patents/

SPECIFICATION BUILDER

JPR-THET-MONO-

1

 -

2

 -

3

 -

4


 -

5


1. Mounting		2. Segments		3. Power Accessory	
SMR	Surface Mount	000002	2'	DKTS	Ground Control Toggle Switch Dimmer
	Remote Power Supply not included	000003	3'	DKDK	Ground Control Knob Dimmer
SMP	Surface Mount	000022	4'	NONE	
	Remote Power Supply included	000033	6'		
SMD	Surface Mount Plug-in Power Supply included	000222	6'		
		000333	9'		
		002222	8'		
		003333	12'		
		022222	10'		
		033333	15'		
		222222	12'		
		333333	18'		
See pages 134–135 for mounting/ spacing configurations and dimensions for various fixture lengths.					

4. CCT	5. Finish
27 2700 K	01 Satin Brass
30 3000 K	02 Black Oxide
35 3500 K	03 Satin Nickel
40 4000 K	40 English Bronze
Stock finishes shown. See Finishes for additional options.	


CONTROL OPTIONS



Plug-In Power Supply




Ground Control Toggle Switch
Inset Switch
2.5 × 2.5 in
63.5 × 63.5 mm



Ground Control Dimmer Knob
Inset Switch
2.5 × 2.5 in
63.5 × 63.5 mm

MOUNTING OPTION



Note: if the table is thicker than that, please contact Juniper technical support.




Patent www.juniperdesign.com/patents/


For detailed photometrics, see [Photometric Data](#).
IES files available.

SYSTEM LOGIC

Example:
JPR-THET-MONO-XXX-000022-XXX-XX-XX
4' nominal — 2 segments (2 light segments)

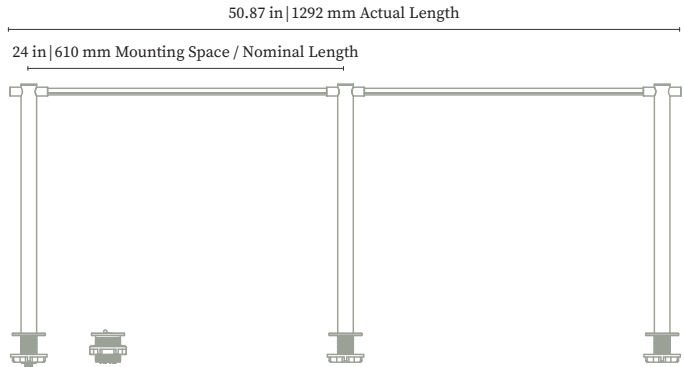

CONFIGURATIONS — DIAGRAMS

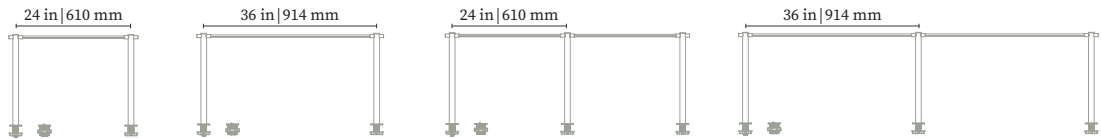

000002
2 ft fixture

000003
3 ft fixture

000022
4 ft fixture


000033
6 ft fixture



000222
6 ft fixture

000333
9 ft fixture

002222
8 ft fixture

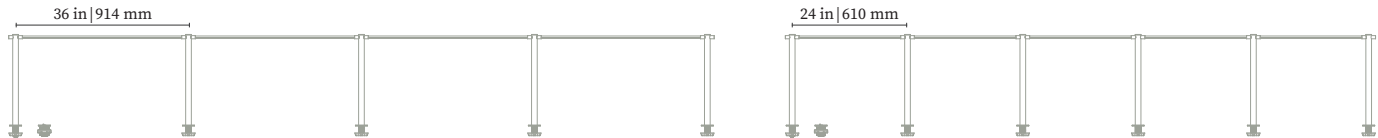


003333
12 ft fixture

022222
10 ft fixture



033333
15 ft fixture

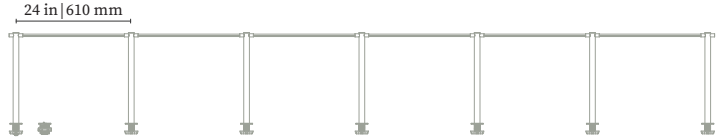

222222
12 ft fixture



333333
18 ft fixture

